




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D1	REVISED PER ECO-11-005294	29APR2011	RK	HMR
	E	REVISED PER ECO-13-019231	09DEC2013	DR	RB

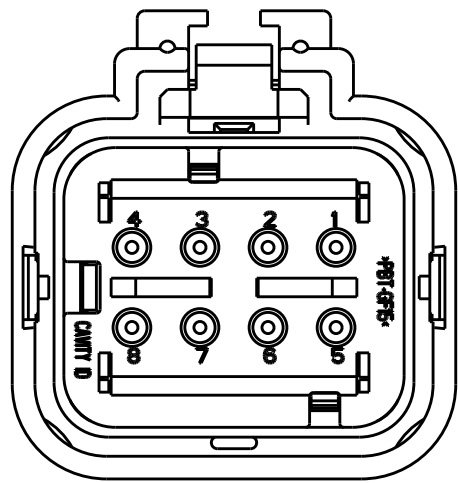

776532-2
(GRAY TPA)
SCALE 2:1

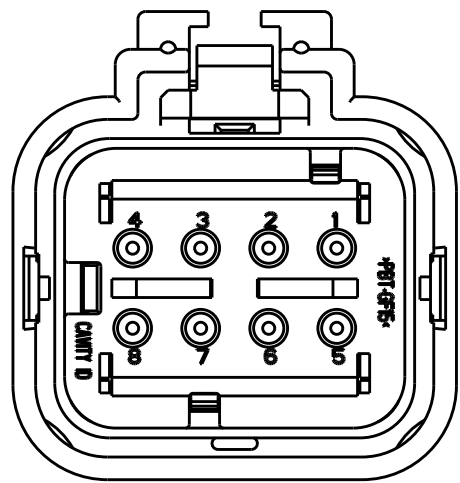


776532-3
(YELLOW TPA)
SCALE 2:1

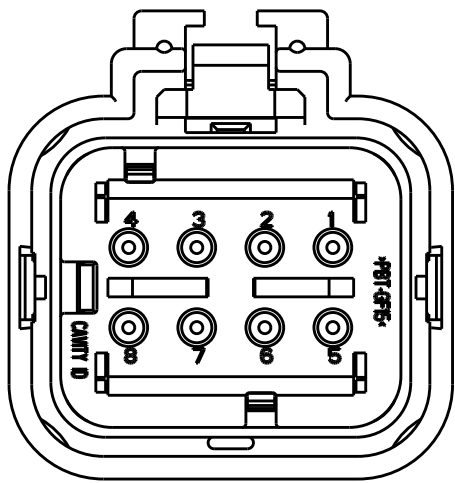


776532-4
(GREEN TPA)
SCALE 2:1


- 1 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK
- 2 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: RUST
- 4 MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: RED
5. RECOMMENDED WIRE DIAMETER RANGE IS 1.30 TO 2.54mm.
- 6 MATERIAL: SILICONE
COLOR: TAN

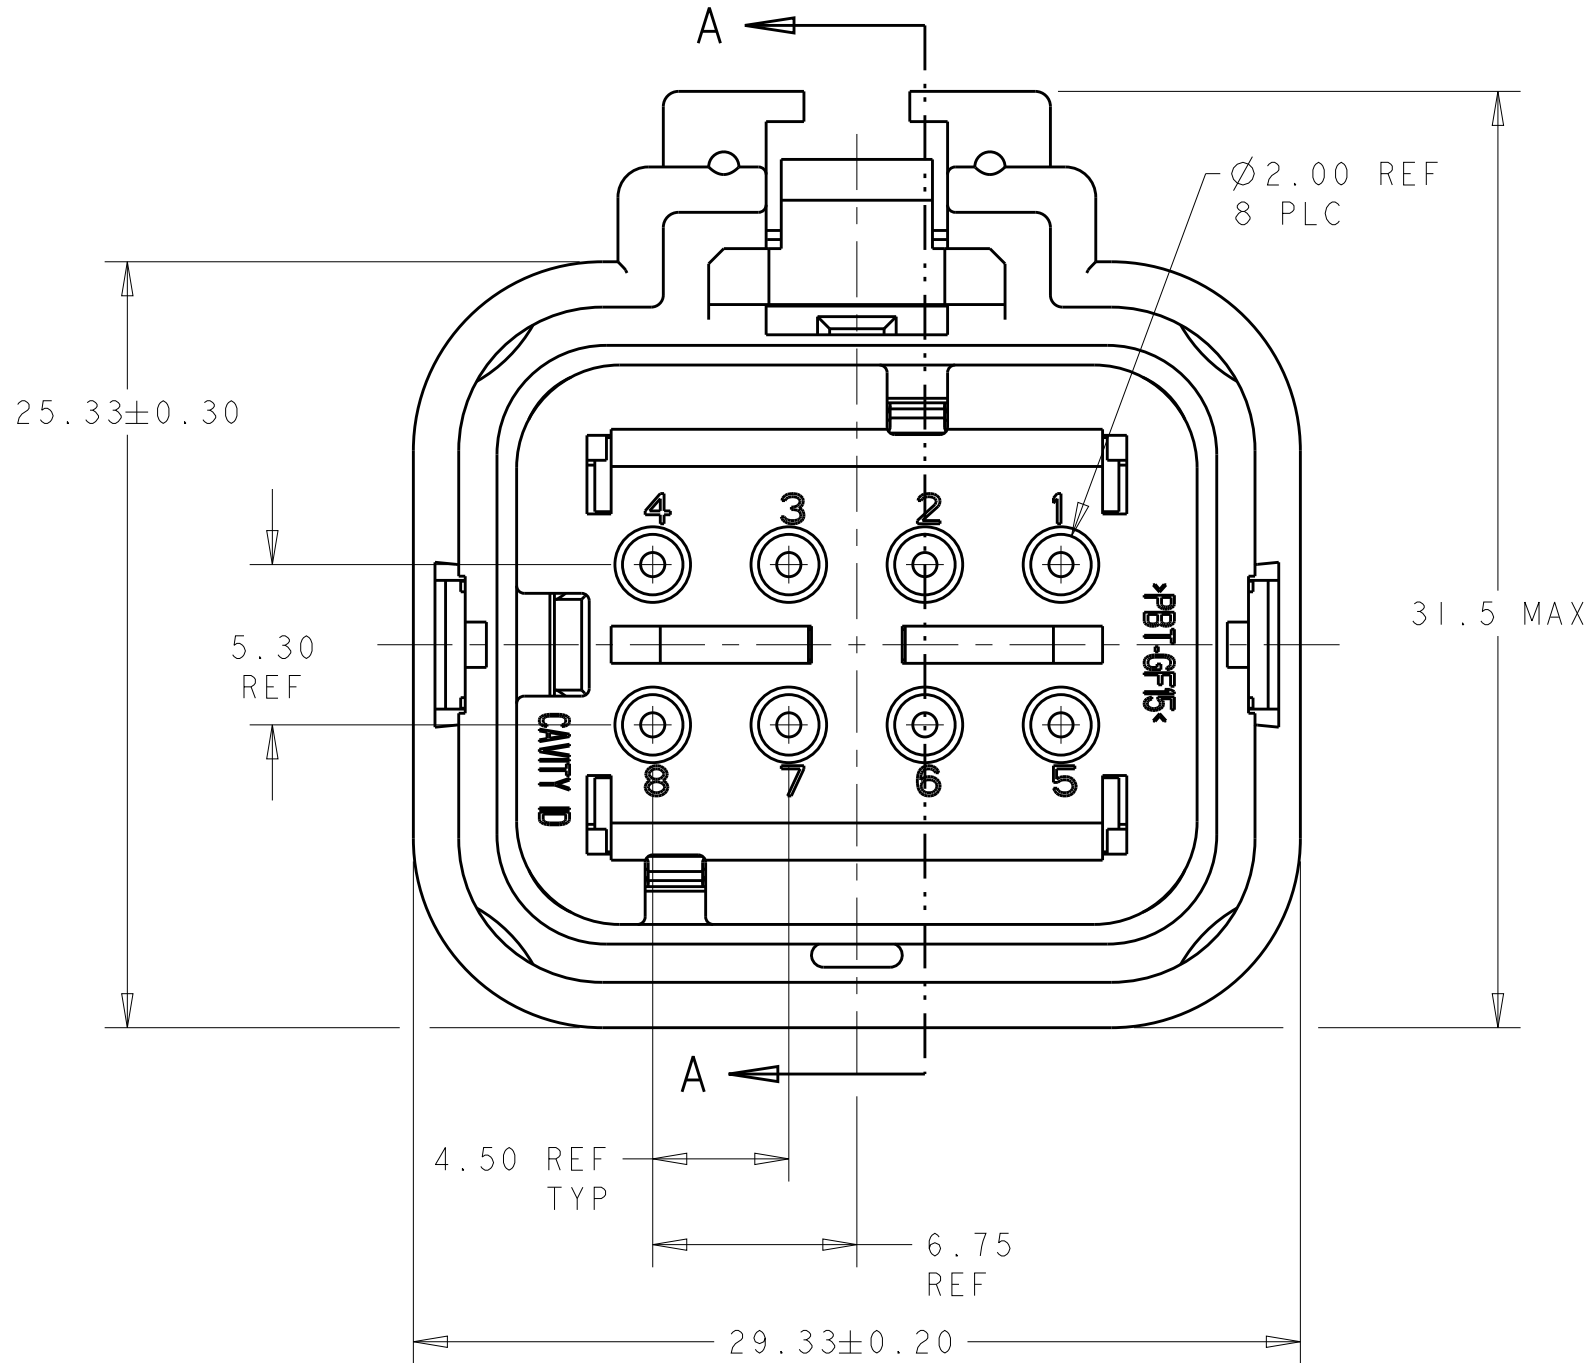

776532-1 SHOWN

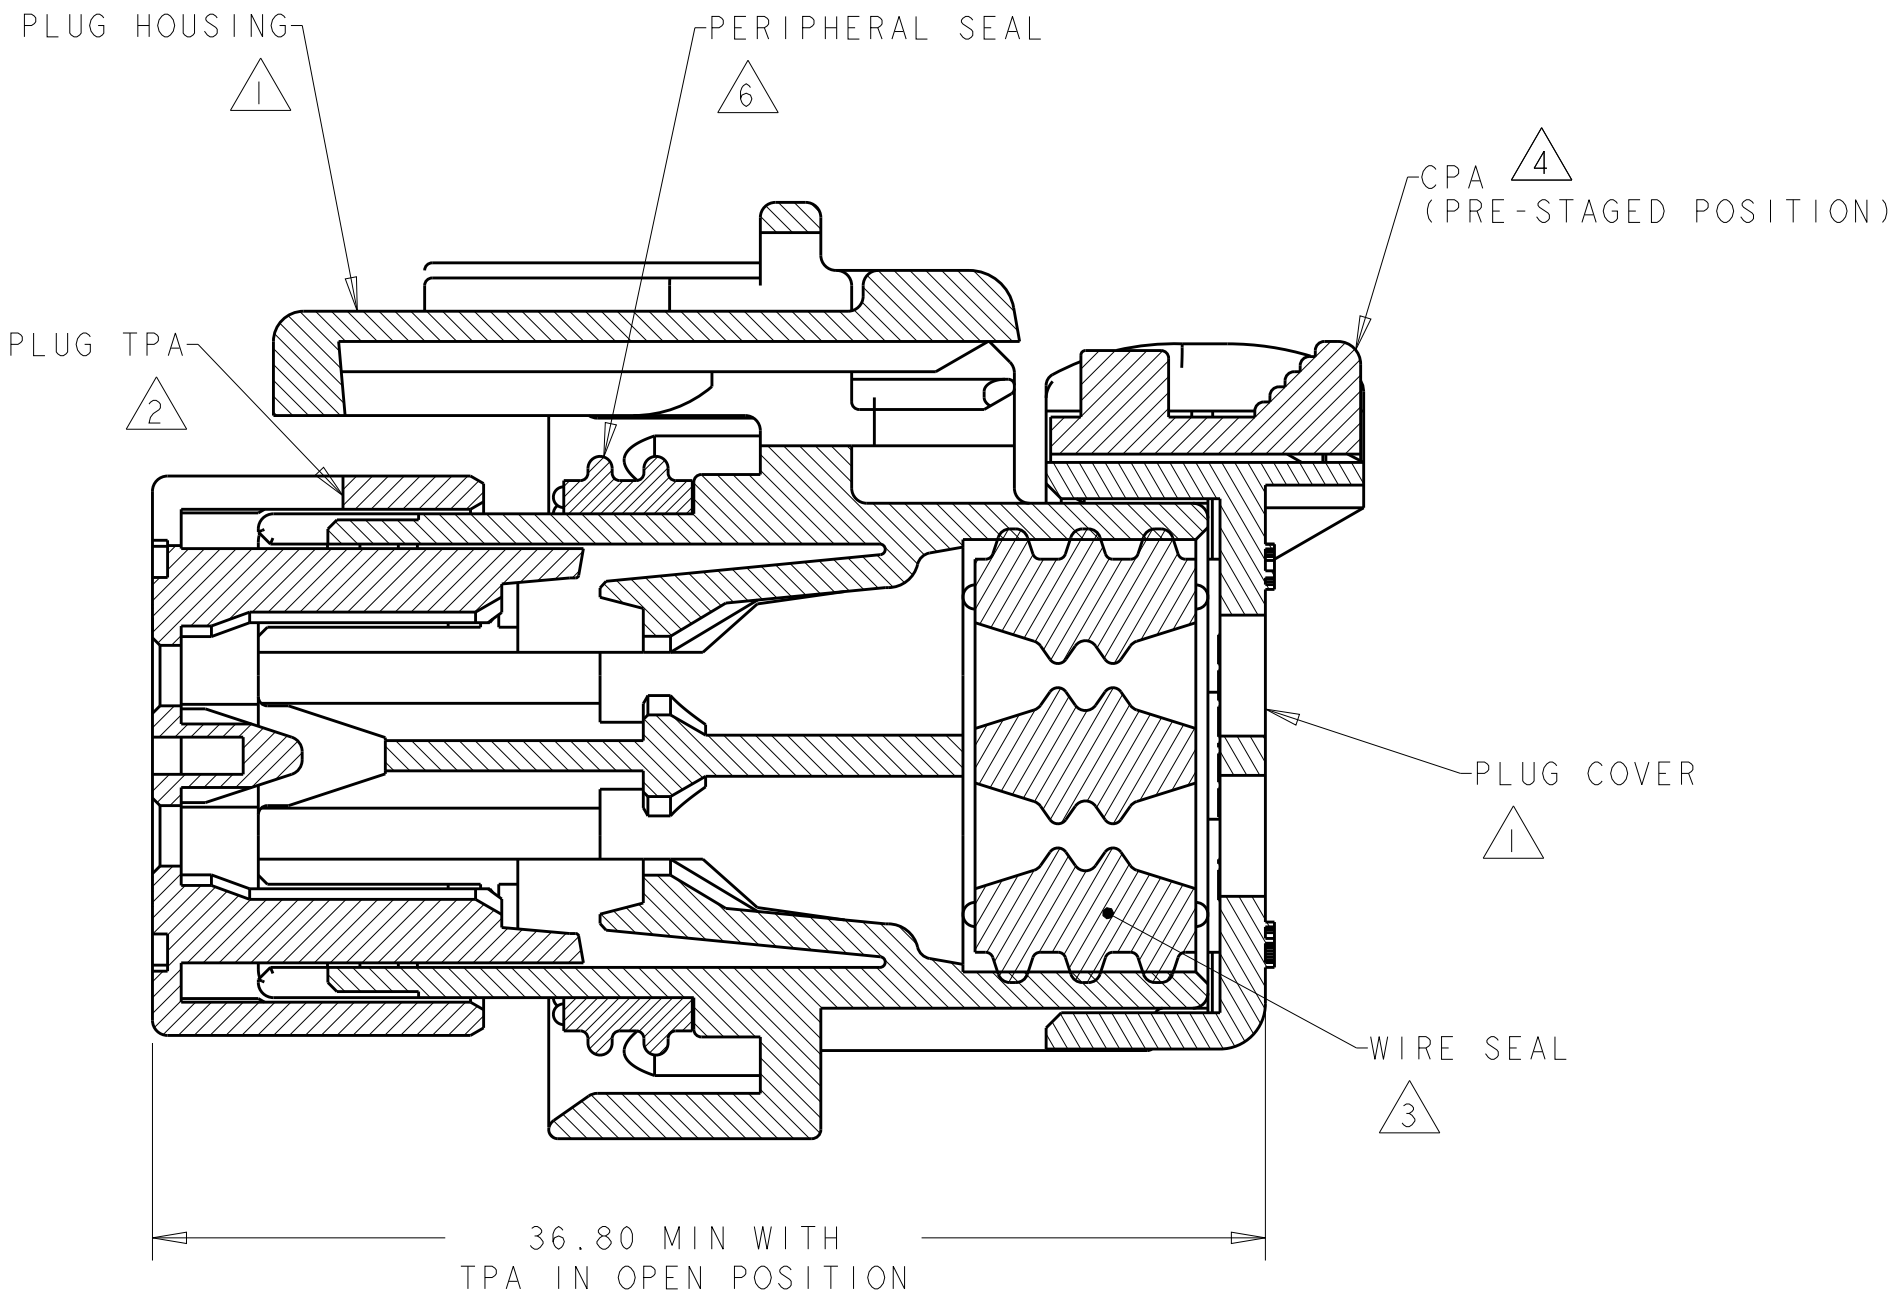

SECTION A-A

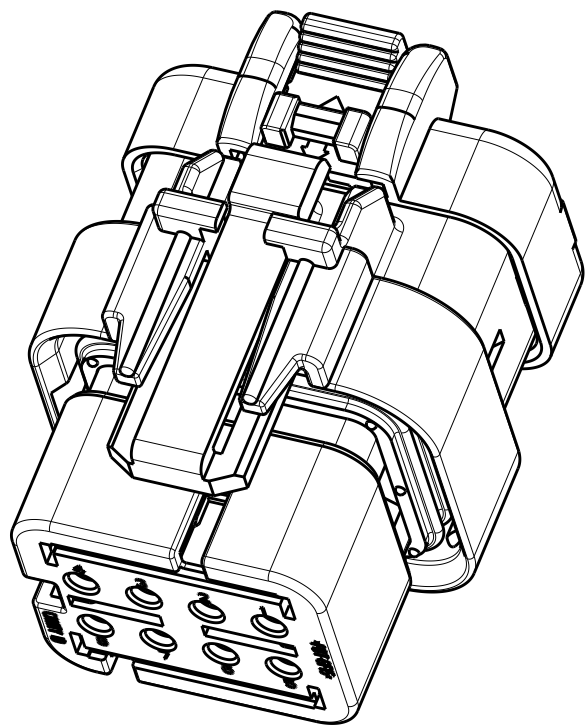

SCALE 2:1

GREEN	776532-4
YELLOW	776532-3
GRAY	776532-2
RED	776532-1
TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. SIMPSON 05NOV2002	TE Connectivity			
DIMENSIONS: mm		CHK D. KLEIN 05NOV2002				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. KLEIN 05NOV2002	NAME PLUG ASSEMBLY, 8 POSITION, DUAL ROW, REDUCED DIA WIRE SEAL, AMPSEAL 16			
MATERIAL		PRODUCT SPEC 108-2184	SIZE A2	CAGE CODE -	DRAWING NO C-776532	RESTRICTED TO -
		APPLICATION SPEC 114-13065	SCALE 4:1	SHEET 1	OF 1	REV E
		WEIGHT 16±1g	Customer Drawing			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[776532-3](#)