

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0643231319

Status:


Active

Overview:

CMC and CMX Sealed, Hybrid, Modular Connectors

Description:

1.50mm CMC CP Female Terminal, Tin plated; Selective 1.27µm Gold in Contact Area, for Tab Dimensions 1.5mm x 0.8mm, Wire Size 0.5mm² -1.0mm²

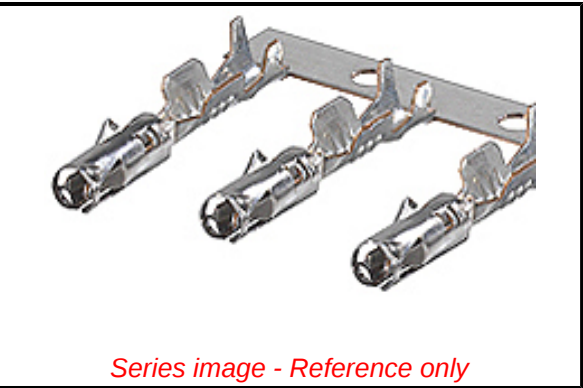

Documents:	
3D Model	Application Specification AS-64323-001-CH-001 (PDF)
Drawing (PDF)	Application Specification AS-64323-001-FR-001 (PDF)
Product Specification PS-64319-002-001 (PDF)	Application Specification AS-98420-001-001 (PDF)
Application Specification AS-64318-002-001 (PDF)	Application Specification AS-98420-001-CH-001 (PDF)
Application Specification AS-64318-002-CH-001 (PDF)	Application Specification AS-98420-001-FR-001 (PDF)
Application Specification AS-64318-002-FR-001 (PDF)	Application Specification AS-98420-001-SP-001 (PDF)
Application Specification AS-64318-002-SP-001 (PDF)	Application Specification AS-98420-002-001 (PDF)
Application Specification AS-64319-002-001 (PDF)	Application Specification AS-98420-002-CH-001 (PDF)
Application Specification AS-64319-002-CH-001 (PDF)	Application Specification AS-98420-002-FR-001 (PDF)
Application Specification AS-64319-002-FR-001 (PDF)	Application Specification AS-98420-002-SP-001 (PDF)
Application Specification AS-64319-002-SP-001 (PDF)	Packaging Specification PK-98915-001-001 (PDF)
Application Specification AS-64323-001-001 (PDF)	RoHS Certificate of Compliance (PDF)

General	
Product Family	Crimp Terminals
Series	64323
Application	Power, Wire-to-Wire
Comments	* Current tested on a fully loaded connector, current for temperature increase of 40°C. Current max = 12A for 1.50mm Terminal (2.00mm ² wire)*
Crimp Quality Equipment	Yes
Overview	CMC and CMX Sealed, Hybrid, Modular Connectors
Product Name	CMC, CP Terminal
UPC	883906129712
Physical	
Gender	Female
Material - Metal	High Copper
Material - Plating Mating	Tin
Material - Plating Termination	Gold
Net Weight	0.285/g
Packaging Type	Reel
Plating min - Mating	1.016µm, 3.048µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.40mm-2.15mm
Wire Size AWG	18, 20
Wire Size mm ²	0.50-1.00
Electrical	
Current - Maximum per Contact	12.0A

EU ELV

Compliant

EU RoHS

Compliant

China RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free

Status

Not Relevant

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Not Relevant
ELV	Compliant
Prop65	Compliant
RoHS Phthalates	Not Contained

Search Parts in this Series
[64323](#) Series

Mates With
CMC Connector [64318](#) , [64319](#) , [64320](#) , [64321](#) , [64326](#)

Use With
CMC Connector [64318](#) , [64319](#) , [64320](#) , [64321](#) , [64326](#)

Voltage - Maximum	14V DC
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-64318-002-001, AS-64318-002-CH-001, AS-64318-002-FR-001, AS-64318-002-SP-001, AS-64319-002-001, AS-64319-002-CH-001, AS-64319-002-FR-001, AS-64319-002-SP-001, AS-64323-001-001, AS-64323-001-CH-001, AS-64323-001-FR-001, AS-98420-001-001, AS-98420-001-CH-001, AS-98420-001-FR-001, AS-98420-001-SP-001, AS-98420-002-001, AS-98420-002-CH-001, AS-98420-002-FR-001, AS-98420-002-SP-001
Packaging Specification	PK-98915-001-001
Product Specification	PS-64319-002-001
Sales Drawing	SD-64323-001-000

This document was generated on 09/12/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[64323-1319](#) [64323-1319 \(Cut Strip\)](#) [64323-1319 \(Loose Piece\)](#) [64323-1319 \(Mouser Reel\)](#)