

REV. 1
DCO 142226


TOL ± .010 UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	
RESISTANCE	1350 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

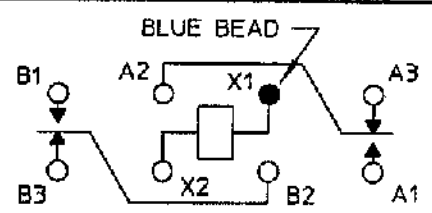

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC RESISTIVE
	50,000 OPERATIONS

DR. R.B. 9/10/97 CK. *S/2/00*



CUST. QPL
CUST. NO. M39016/13-072M REV.

3SBC RELAY

3SBC1537A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SBC1537A2](#)