

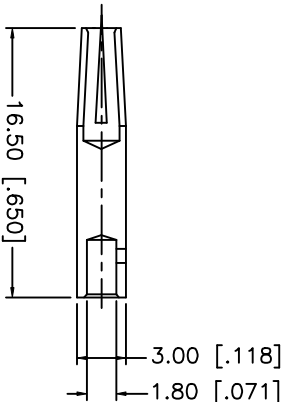
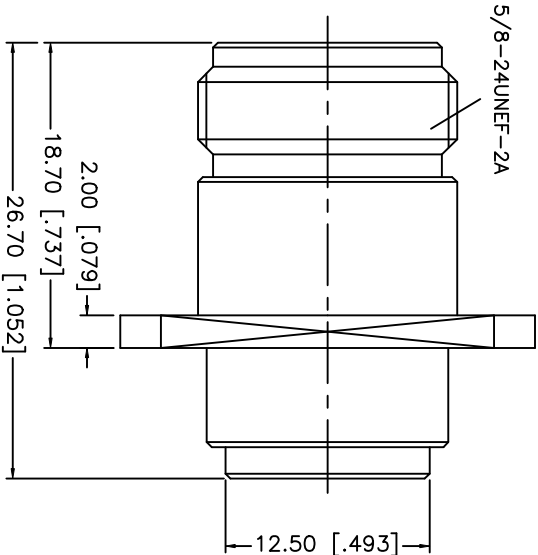
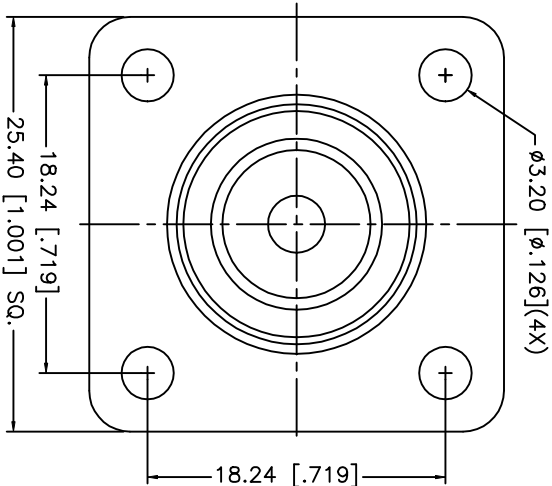



REV.	DATE	DESCRIPTION
NC	05/06/02	INITIAL RELEASE

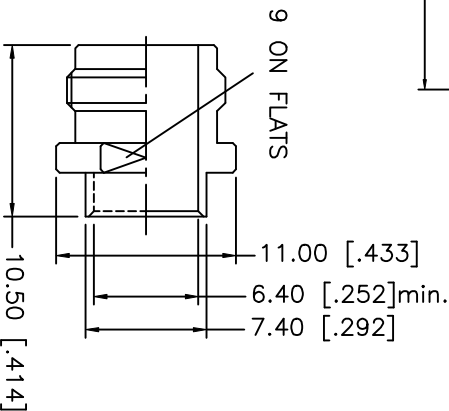

CRIMP NOTES:
1. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"
OR SOLDER.



Amphenol - Connex CONNECTOR CORPORATION											
DESCRIPTION		MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY							
1	OUTER BODY	BRASS	NICKEL								
2	INSULATOR	TEFLON	NATURAL								
3	CONTACT PIN	PHOS. BRONZE	GOLD								
4	SOLDER NUT	BRASS	GOLD								
5				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4							
6											
7											
8											
DO NOT SCALE DRAWING											
APPROVALS				DATE		TITLE					
				05/06/02							
DRAWN		G.R.S.		N PANEL DIRECT SOLDER JACK (FOR .250" SEMI RIGID CABLE)							
CHECKED											
ISSUED											
SIZE		FSQM NO.		DWG. NO.		172300.DWG					
A		99001									
SCALE		NA		PART NO.							
		172300		SHEET		1 OF 1					

Amphenol - Connex
CONNECTOR CORPORATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[172300](#)