

## Heyco® Polyurethane Adhesive-Back Bumpers

	•	•						
			IENSIONS		PAR	ГΝО.	DESCRIPTION	Pieces
	A Diameter		B Height		Clear Black			per Sheet
	in.	mm.	in.	mm.	0.00	2.00.		
	<b>HBA Serie</b>	s - Hemi						
	.25	6,4	.06	1,6	N040	N140	HBA 250-06	578
	.31	7,9			N027	N127	HBA 312-09	
w!>	.01	7,9	.09	2,3	NSD027	-	HBA 312-09-SD	450
	.34	8,6			N007	N107	HBA 335-09	430
W!>	.01	0,0			NSD007	-	HBA 335-09-SD	
	.38	9,7	.15	3,8	N012	N112	HBA 375-15	200
W!>	.00	0,1	.10	0,0	NSD012	-	HBA 375-15-SD	288
w!>	.38	9,7	.21	5,3	N022	N122	HBA 375-21	300
W!>	.00	0,1		0,0	NSD022	-	HBA 375-21-SD	000
W!>	.39	9,9	.12	3,0	N010	N110	HBA 394-12	288
W!					NSD010	-	HBA 394-12-SD	
	.44	11,2	.20	5,1	N002	N102	HBA 440-20	242
					NSD002	-	HBA 440-20-SD	
	.62	15,7	.31	7,9	N015	N115	HBA 620-31	128
	.70	17,8	.38	9,7	N008	N108	HBA 700-38	98
	.75	19,1	.08	1,9	N039	N139	HBA 750-08	84
	CBA Series	s - Cylinder						
			.13	3,2	N034	N134	CBA 370-13	300
<u>:W!</u>	.38	9,7			NSD034	-	CBA 375-13-SD	
			.19	4,8	N035	N135	CBA 370-19	200
	.50	12,7	.06	1,5	N005	N105	CBA 500-06	200
			.14	3,6	N001	N101	CBA 500-14	
			0.5		NSD001	-	CBA 500-14-SD	
	0.5	40.5	.25	6,4	N006	N106	CBA 500-25	100
	.65	16,5	.40	10,2	N011	N111	CBA 650-40	128
W!>	.75	19,1	.16	4,1	N044	N144	CBA 750-16	98
	.78	19,8	.20	5,1	N041	N141	CBA 780-20	84
w!>	.81	20,6	.12	3,0	N024	N124	CBA 810-12	72
W!	1.23	31,2	.10	2,5	N072	N172	CBA 1230-10	32
1111		es - Tapered		4.0	NODOCZ			NEW STY
W!	.72	9,7	.18	4,6	NSD067	- N427	TCBA 375-18-SD	288
W!>		18,2	.56	14,2	N037	N137	TCBA 720-56	1
	CDBA Seri	es - Pocket	I	I	N040	N440	ODDA 500 14	
14/1	.50	12,7	.14	3,6	N018	N118	CDBA 500-14	200
W!>	.88	22,4	.40	10,2	NSD018 N017	N117	CDBA 500-14-SD CDBA 880-40	72
	1.81	46,0	.60	15,2	N017	N130	CDBA 1810-60	1
		ries - Revers				NIJU		NEW STY
W!>						_	RCDBA 500-20-SD	200
VV:	.50	12,7 s - Square or	.20	5,1	NSD058	_	110DDA 300-20-3D	200
	.40	10,2	.10	2.5	MOSO	N120	TBA 4040-10	242
_	.40	10,2	.10	2,5	N020 N009	N109	TBA 5050-12	242
	.50	12,7	.12	3,0 5,8	NO3R	N109 N13R	TBA 5050-12	200
w!>			.25	6,4	NO29	N13H N129	TBA 7878-25	98
=	.78	19,8	.38	9,7	N029 N004	N129 N104	TBA 7878-38	96
W!>	.81	20,6	.30	7,6	N019	N104 N119	TBA 8181-30	98
w!>	1.00	25,4	.18	4,6	N019	N119 N136	TBA 100100-18	5
W:		es - Round P		7,0	11000	14 100	1DV 100100-10	NEW STY
w!>	.50	12,7	.15	3,8	NSD033		RPBA 500-15-SD	200
WY: /	.00	clear and black			Nongo	-	111 DV 200-12-2D	200

Standard colors clear and black. For white, gray or brown consult Heyco.

NSD refers to soft durometer Polyurethane (Shora A 45-55) and will not be available in Black.

Material Polyurethane

Recognized under the Component Program of Underwriters' Certifications


Laboratories File E196663

Flammability Rating

Temperature Range 0°F (-18°C) to 180°F (82°C)



- Quick and easy installation—simply peel off backing and press into place. With no holes to drill, and no screws or rivets needed, adhesive backed bumpers will save you time and money.
- Bumpers can be attached to a wide variety of surfaces; aluminum, ceramic, formica, glass, painted surfaces, polyethylene, polypropylene, vinyl, and steel.
- Adhesive backed bumpers are nonmarking, nonstaining, skid, and scratch resistant.
- Surface must be clean, dry, and free of grease, oil, and other common solvents to obtain maximum adhesion. Clean surfaces with low strength solvents such as Isopropyl Alcohol or Heptane.
- Bumpers have a rubber-based pressure sensitive adhesive with an end use temperature of 0°F (-18°C) to 180°F (82°C).

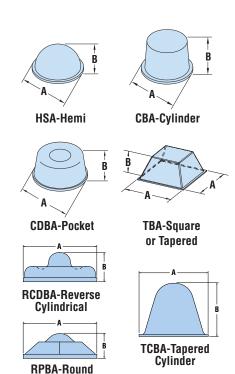

**Pyramid** 

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Heyco:

N006 N107 N117 N135 N124 N101 N106 N130 N105 N008 N007 N027 N109 N139 N015 N018 N002 N017 N127 N115 N041 N112 N141 N118 N030 N108 N140 N024 N011 N012 N009 N035 N111 N019 N102 N001 N005 N040 N119 N039 N120 N03R N13R N034 N020 N134 N129 NSD002 N044 NSD027 N072 N022 NSD001 NSD018 N122 NSD010 N029 NSD007 NSD034 NSD033 NSD022 NSD067 NSD012 NSD058 N172