

THIS DRAWING IS UNPUBLISHED.  
 RELEASED FOR PUBLICATION  
 - - -  
 © COPYRIGHT - By -  
 ALL RIGHTS RESERVED.

LOC DIST REVISIONS  
 - - P LTR DESCRIPTION DATE DWN APVD  
 H2 REVISED PER ECO-11-004587 11MAR11 RK HMR

	-	-	-	-	-	-	-	-	-	-	-	-	-	-	180.7	188.2	18	1-1546306-8
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	171.2	178.7	17	1-1546306-7
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	161.7	169.2	16	1-1546306-6
	△2△3△4	-	-	-	-	-	-	-	-	-	-	-	-	-	152.2	159.7	15	6-1546306-2
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	152.2	159.7	15	1-1546306-5
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	142.7	150.2	14	1-1546306-4
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	133.2	140.7	13	1-1546306-3
	△5	-	-	-	-	-	-	-	-	-	-	-	-	-	123.7	131.2	12	4-1546306-0
	△4	-	-	-	-	-	-	-	-	-	-	-	-	-	123.7	131.2	12	3-1546306-3
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	123.7	131.2	12	1-1546306-2
	△6	-	-	-	11	-	-	-	-	-	-	-	-	-	114.2	121.7	11	5-1546306-2
	△1△3	-	-	-	-	2	-	-	-	-	-	11	-	-	114.2	121.7	11	3-1546306-4
	△3	-	-	-	-	-	-	-	-	-	-	-	-	-	114.2	121.7	11	1-1546306-1
	△1	-	-	-	-	-	-	-	-	10	3	-	-	-	104.7	112.2	10	6-1546306-0
	△3△6	-	-	-	-	-	-	-	-	-	-	-	-	-	104.7	112.2	10	5-1546306-8
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	104.7	112.2	10	1-1546306-0
	△△3△	-	4	9	-	-	-	-	-	-	-	-	-	-	95.2	102.7	9	6-1546306-3
	△3△6	-	-	-	-	-	-	-	-	-	-	-	-	-	95.2	102.7	9	5-1546306-6
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	95.2	102.7	9	1546306-9
	-	-	-	-	-	-	-	-	-	8	-	-	-	-	85.7	93.2	8	5-1546306-9
	△3△5	-	-	-	-	-	-	-	-	-	-	-	-	-	85.7	93.2	8	3-1546306-9
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	85.7	93.2	8	1546306-8
	△3△6	-	-	-	-	-	-	-	-	-	-	-	-	-	76.2	83.7	7	5-1546306-5
	△1	-	-	-	-	-	1	-	7	-	-	-	-	-	76.2	83.7	7	5-1546306-0
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	76.2	83.7	7	4-1546306-5
	△3	-	-	-	-	-	-	-	-	7	-	-	-	-	76.2	83.7	7	3-1546306-7
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	76.2	83.7	7	1546306-7
	△3△6	-	-	-	-	-	-	-	-	-	-	-	-	-	66.7	74.2	6	5-1546306-4
	△△3	-	-	-	-	-	1	6	-	-	-	-	-	-	66.7	74.2	6	4-1546306-9
	-	-	-	-	-	-	6	-	-	-	-	-	-	-	66.7	74.2	6	4-1546306-8
	-	-	-	-	-	-	-	-	-	-	-	6	6	6	66.7	74.2	6	4-1546306-4
	△3	-	-	-	-	-	-	-	-	6	-	-	-	-	66.7	74.2	6	3-1546306-6
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	66.7	74.2	6	1546306-6
	△6	-	-	-	-	-	-	-	5	-	-	-	-	-	57.2	64.7	5	5-1546306-7
	△6	-	5	5	-	-	-	-	-	-	-	-	-	-	57.2	64.7	5	5-1546306-3
△△3	SCREW ON ONE SIDE	-	-	-	-	-	-	-	-	-	-	-	-	-	57.2	64.7	5	4-1546306-7
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	57.2	64.7	5	4-1546306-3
	△3	-	-	-	-	-	-	-	-	5	-	-	-	-	57.2	64.7	5	3-1546306-5
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	57.2	64.7	5	1546306-5
	-	-	-	-	-	-	-	-	-	4	4	4	4	4	47.7	55.2	4	4-1546306-2
	△3△5	-	-	-	-	-	-	-	-	-	-	-	-	-	47.7	55.2	4	3-1546306-8
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	47.7	55.2	4	1546306-4
	-	3	3	-	-	-	-	-	-	-	-	-	-	-	38.2	45.7	3	6-1546306-1
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	38.2	45.7	3	5-1546306-1
	-	-	-	-	-	-	-	-	2	2	2	-	-	-	38.2	45.7	3	1546306-3
△3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	28.7	36.2	2	4-1546306-6
	-	-	-	-	-	-	2	2	2	-	-	-	-	-	28.7	36.2	2	4-1546306-1
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	28.7	36.2	2	1546306-2
	NOTES	(13) QC TAB .187 SS FLAT	(12) QC TAB .187 SS FLAT	(11) QC TAB .187 SS 90°	(10) JUMPER	(9) QC TAB DBL .250	(8) QC TAB DBL .250	(7) QC TAB DBL .250	(6) QC TAB DBL .187	(5) QC TAB DBL .187	(4) QC TAB DBL .187	(3) QC TAB SGL .250	(2) QC TAB SGL .250	(1) QC TAB SGL .250	DIM B	DIM A	NO. OF POS.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.			DINN S SCHLEGEL 20AUG2002
DIMENSIONS: MM			CHK 8/20/02
TOLERANCES: UNLESS OTHERWISE SPECIFIED:			C RICHARD 8/20/02
PRODUCT SPEC			APVD C RICHARD 8/20/02
APPLICATION SPEC			NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/O WASHER
MATERIAL	FINISH	WEIGHT	RESTRICTED TO
-	-	-	A2 00779 C-1546306
CUSTOMER DRAWING			SCALE NTS
			REV H2
			NTS
			SHEET 1 OF 3
			REV H2

THIS DRAWING IS UNPUBLISHED.  
 RELEASED FOR PUBLICATION  
 - - -  
 © COPYRIGHT - By -  
 ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	
		-	-	SEE SHEET 1	-	-

PHYSICAL PROPERTIES:  
 HOUSING MATERIAL: THERMOPLASTIC, PC  
 FLAMMABILITY: UL94V-0 COLOR: BLACK  
 MAX BOW/WARP: .0056 IN/IN.

TERMINAL:  
 TERMINALS: BRASS, TIN PLATED  
 SCREWS: 6-32, STEEL, NICKEL PLATED

MECHANICAL:  
 PITCH (TERMINAL SPACING): 9.50mm(.374")  
 WIRE RANGE: 12-22 AWG  
 RECOMMENDED TIGHTENING TORQUE: 12IN-LBS MAX.

ELECTRICAL PROPERTIES:  
 MAXIMUM CURRENT: 20A  
 OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:  
 OPERATING TEMP RANGE: -40°C TO +120°C.

- 1 SEE FIGURE.
- 2 MARKED WITH WHITE INK.
- 3 PRELIMINARY PART NUMBER.
- 4 SCREWS AND TERMINALS ARE NICKEL PLATED BRASS.
- 5 STAINLESS STEEL SCREWS.
- 6 SCREWS ARE NICKEL PLATED BRASS.
- 7 WIRE CLAMP SCREWS TO BE USED ONLY ON SIDE OPPOSITE QC TABS.
- 8 TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.

-- SELECT LOAD CHART --

-	-	4-5,5-6	-	-	-	-	ALL	-	-	-	-	-	11	3-1546306-4
-	-	-	-	-	-	-	ALL	1-3	-	-	-	-	10	6-1546306-0
-	-	1,2	-	-	-	-	ALL	-	-	-	-	-	7	5-1546306-0
-	-	-	-	-	-	1	ALL	-	-	-	-	-	6	4-1546306-9
(12) QC TAB .187 SS FLAT	(11) QC TAB .187 SS 90°	(10) JUMPER	(9) QC TAB DBL .250	(8) QC TAB DBL .250	(7) QC TAB DBL .250	(6) QC TAB DBL .187	(5) QC TAB DBL .187	(4) QC TAB DBL .187	(3) QC TAB SGL .250	(2) QC TAB SGL .250	(1) QC TAB SGL .250	NO. OF POS.	PART NUMBER	

POSITIONS LOADED

-	-	-	-	-	-	-	-	-	-	-	-	-	294.7	302.2	30	3-1546306-0	
-	-	-	-	-	-	-	-	-	-	-	-	-	285.2	292.7	29	2-1546306-9	
-	-	-	-	-	-	-	-	-	-	-	-	-	275.7	283.2	28	2-1546306-8	
-	-	-	-	-	-	-	-	-	-	-	-	-	266.2	273.7	27	2-1546306-7	
-	-	-	-	-	-	-	-	-	-	-	-	-	256.7	264.2	26	2-1546306-6	
-	-	-	-	-	-	-	-	-	-	-	-	-	247.2	254.7	25	2-1546306-5	
-	-	-	-	-	-	-	-	-	-	-	-	-	237.7	245.2	24	2-1546306-4	
-	-	-	-	-	-	-	-	-	-	-	-	-	228.2	235.7	23	2-1546306-3	
-	-	-	-	-	-	-	-	-	-	-	-	-	218.7	226.2	22	2-1546306-2	
-	-	-	-	-	-	-	-	-	-	-	-	-	209.2	216.7	21	2-1546306-1	
1 2 SPL MARKING	-	-	-	-	-	-	-	-	-	-	-	-	199.7	207.2	20	3-1546306-2	
-	-	-	-	-	-	-	-	-	-	-	-	-	199.7	207.2	20	2-1546306-0	
-	-	-	-	-	-	-	-	-	-	-	-	-	190.2	197.7	19	1-1546306-9	
NOTES	(13) QC TAB .187 SS FLAT	(12) QC TAB .187 SS FLAT	(11) QC TAB .187 SS 90°	(10) JUMPER	(9) QC TAB DBL .250	(8) QC TAB DBL .250	(7) QC TAB DBL .250	(6) QC TAB DBL .187	(5) QC TAB DBL .187	(4) QC TAB DBL .187	(3) QC TAB SGL .250	(2) QC TAB SGL .250	(1) QC TAB SGL .250	DIM B	DIM A	NO. OF POS.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 MM

0 PLC ± -  
 1 PLC ± 0.3  
 2 PLC ± 0.25  
 3 PLC ± -  
 4 PLC ± 2°  
 ANGLES

APPLICATION SPEC

MATERIAL FINISH

WEIGHT -

CUSTOMER DRAWING

DWN 20AUG2002  
 S SCHLEGEL

CHK 8/20/02

C RICHARD

APVD 8/20/02

C RICHARD

PRODUCT SPEC

—

—

—

—



TE Connectivity

9.50MM (.374) DBL ROW BARRIER STRIP  
 W/O WASHER

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—



—

—



—

THIS DRAWING IS UNPUBLISHED.  
RELEASED FOR PUBLICATION  
ALL RIGHTS RESERVED.  
© COPYRIGHT - By -


LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	
				SEE SHEET 1	

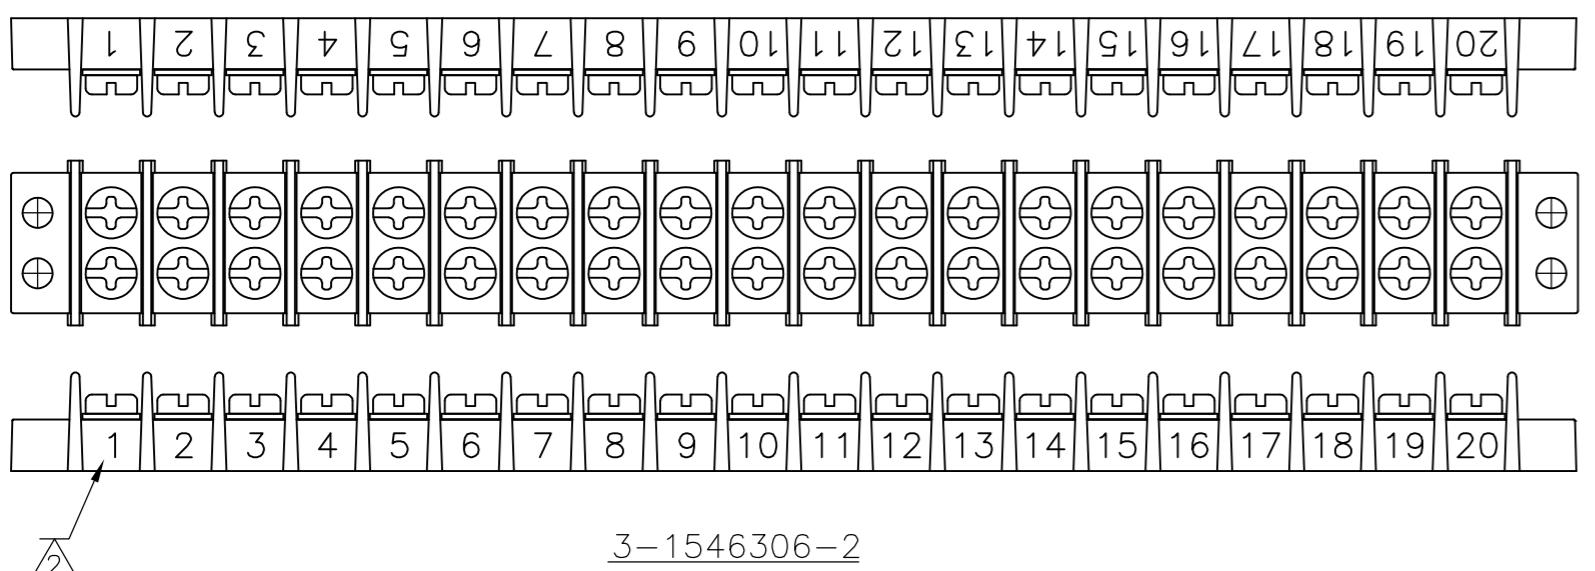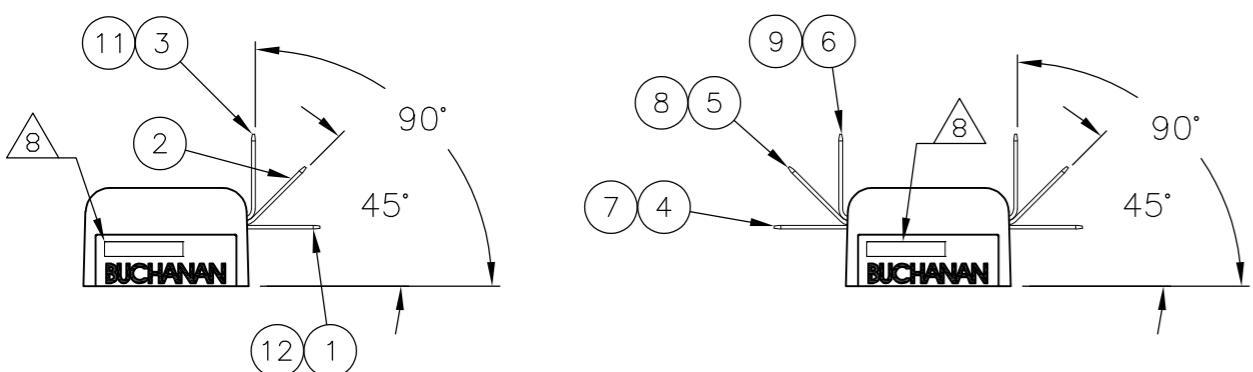



3-1546306-2

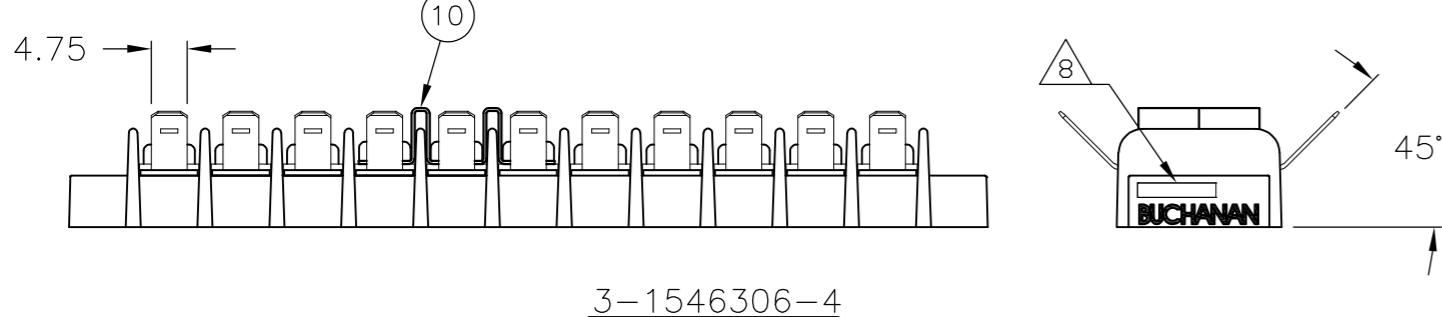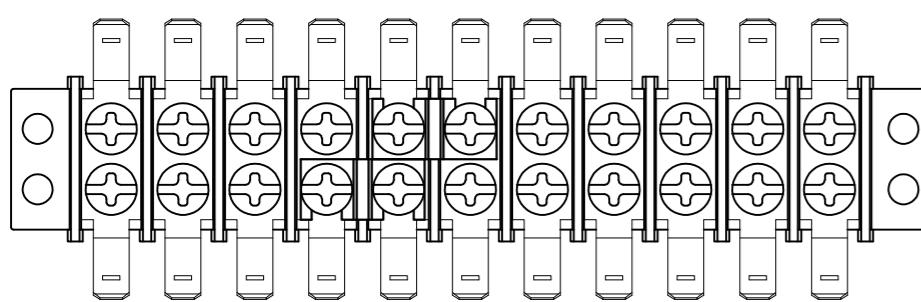


3-1546306-4

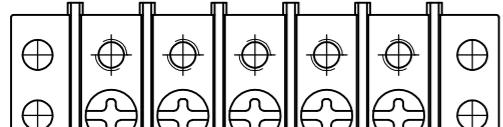


4-1546306-7

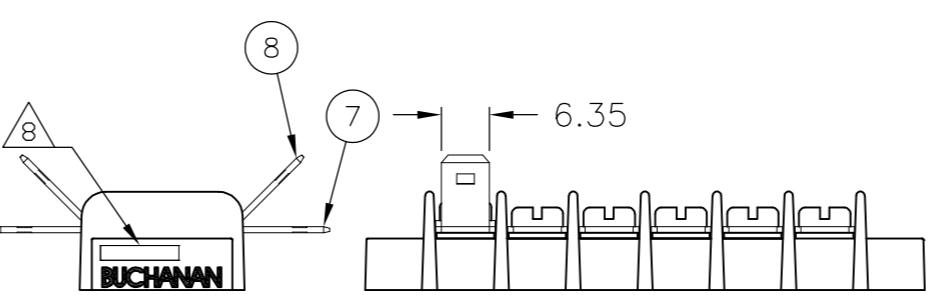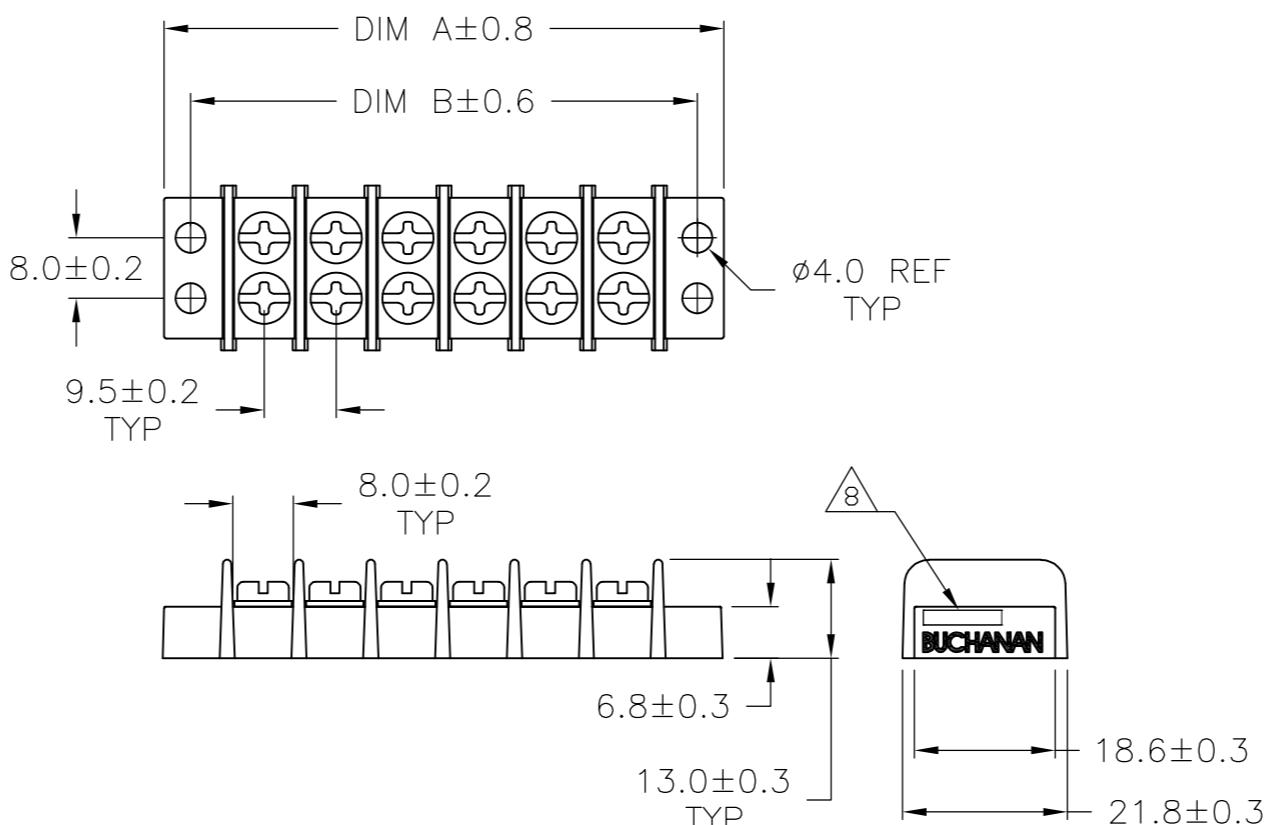


4-1546306-9

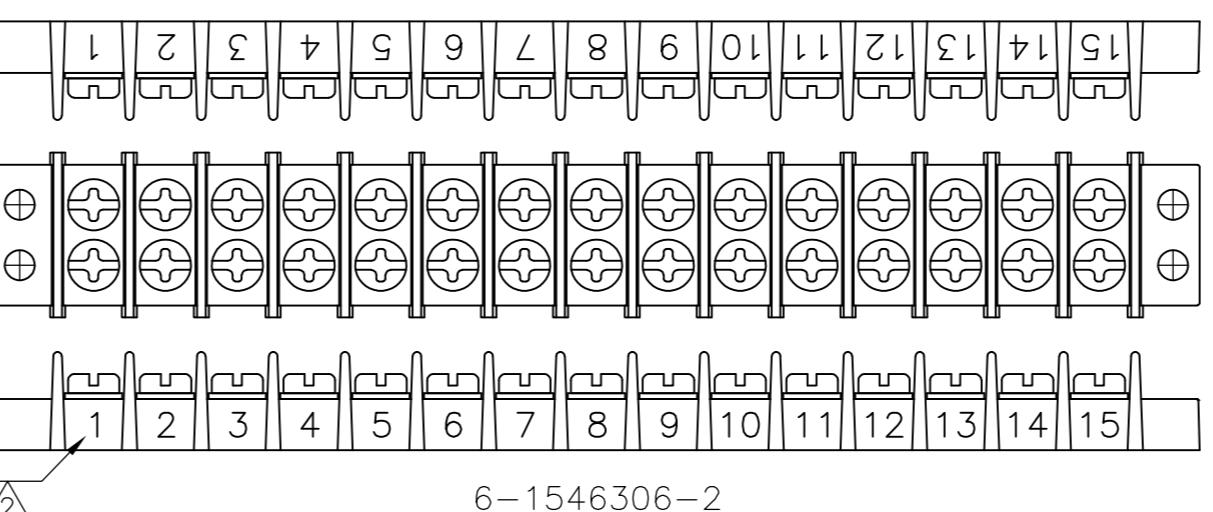


6-1546306-2

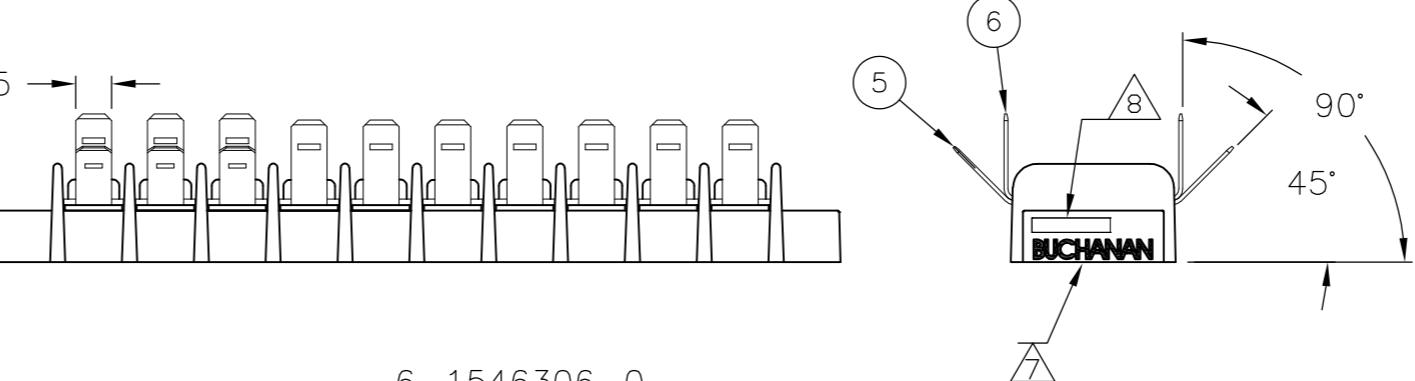

6-1546306-0

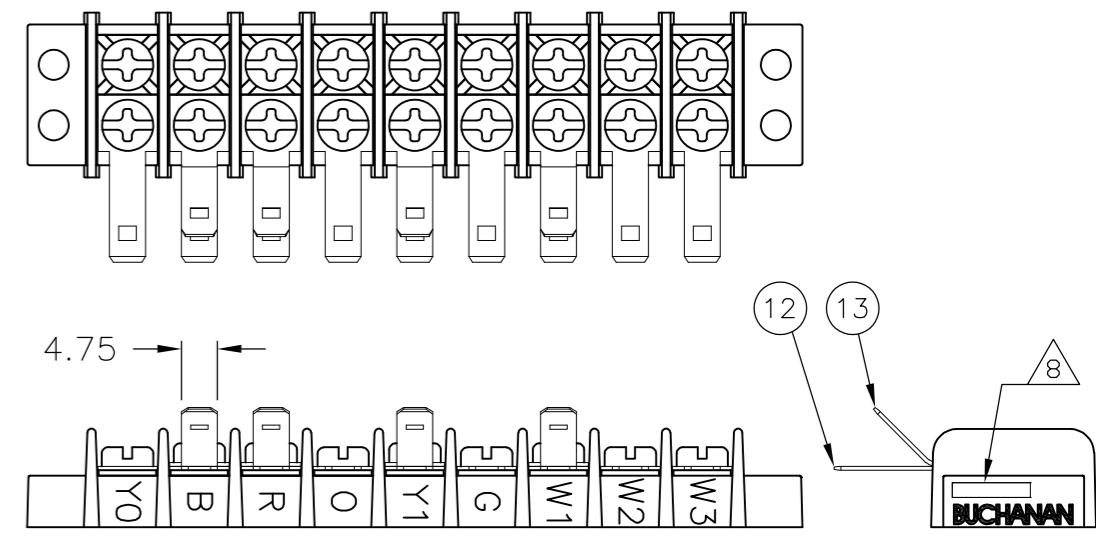

6-1546306-3

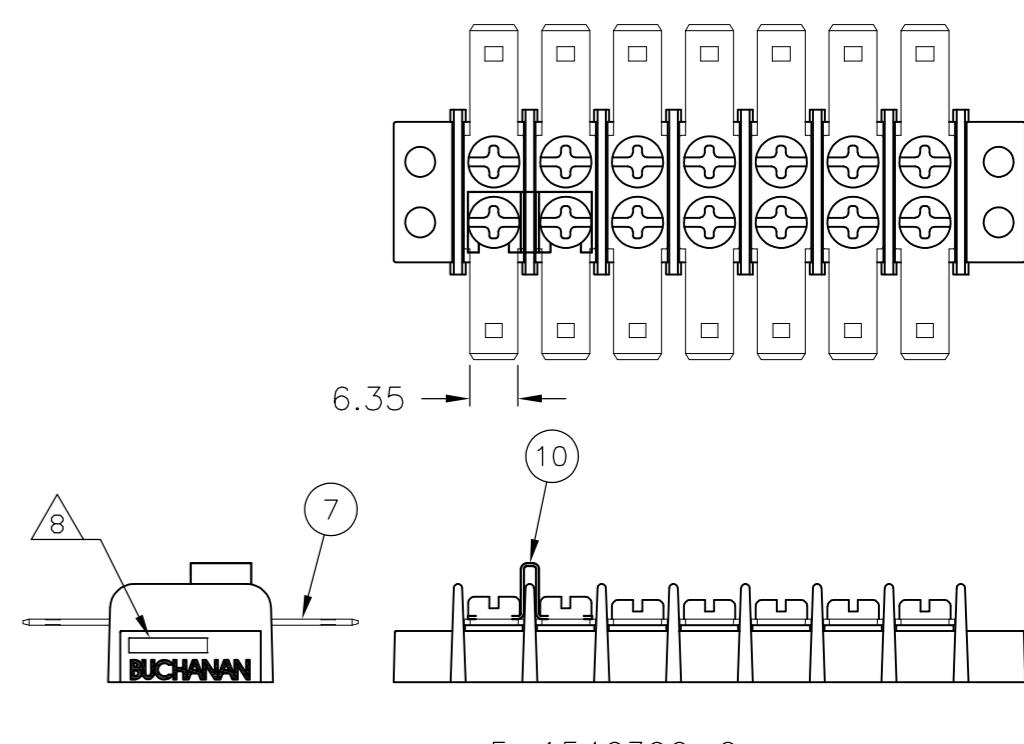

5-1546306-0

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRAWN S. SCHLEGE CHK C. RICHARD APVD C. RICHARD PRODUCT SPEC	20AUG2002 8/20/02 8/20/02 —	TE Connectivity
DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/O WASHER —
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	± ± 0.3 ± 0.25 ± 0.25 ± 0.25 ± 2°	APPLICATION SPEC		SIZE CAGE CODE DRAWING NO A2 00779 C-1546306
MATERIAL	FINISH	WEIGHT	RESTRICTED TO	—
—	—	—	CUSTOMER DRAWING	SCALE NTS SHEET 3 OF 3 REV H2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1546306-5](#)