

Contact insert - HC-B 6-ESTS/Z - 1660290

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Male insert, screw connection with strain relief, marking 1 - x

RoHS

Key Commercial Data

Packing unit	10 pc
GTIN	 4 017918 021955
GTIN	4017918021955

Technical data

Dimensions

Height	35 mm
Width	34 mm
Length	51.5 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

General

Note	For housing HC-B6
Size	B6
Number of positions	6
Flammability rating according to UL 94	V0

Standards and Regulations

Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352

Contact insert - HC-B 6-ESTS/Z - 1660290

Technical data

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance


China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Schematic diagram



Diagram

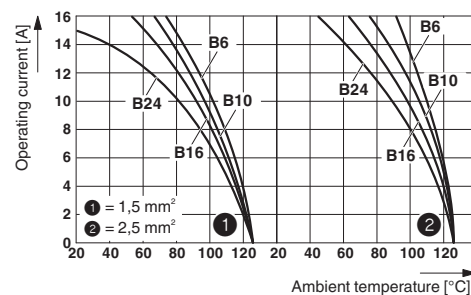

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
 Flachsmarktstr. 8
 32825 Blomberg
 Germany
 Tel. +49 5235 300
 Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1660290](#)