

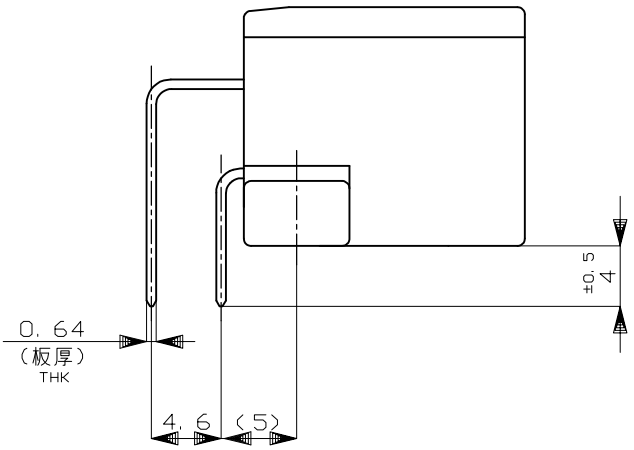
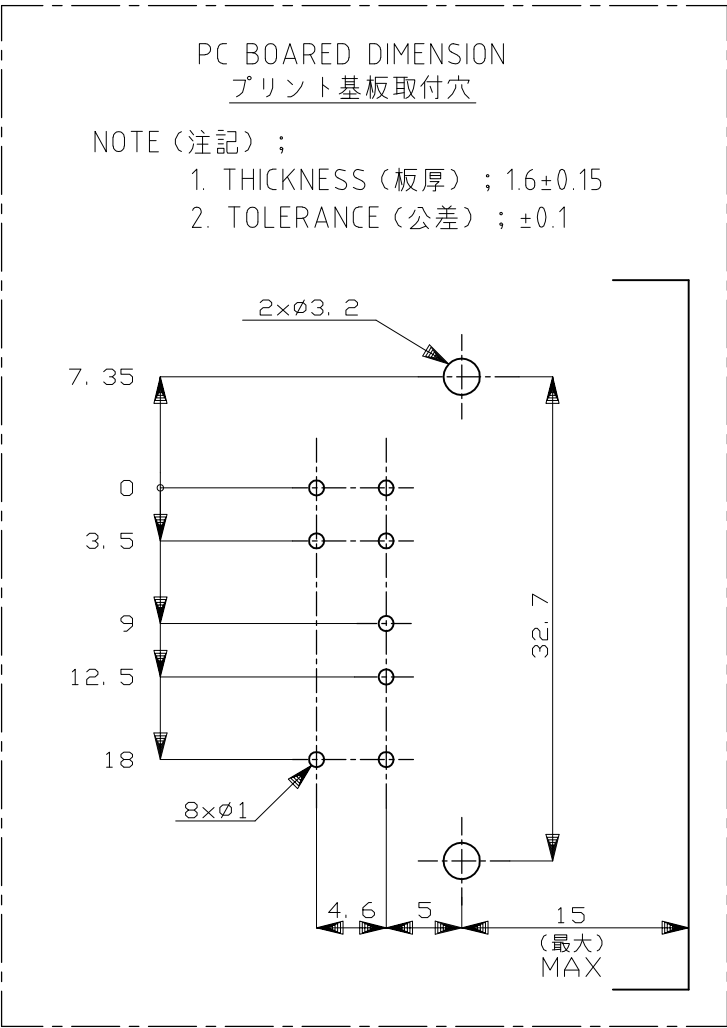
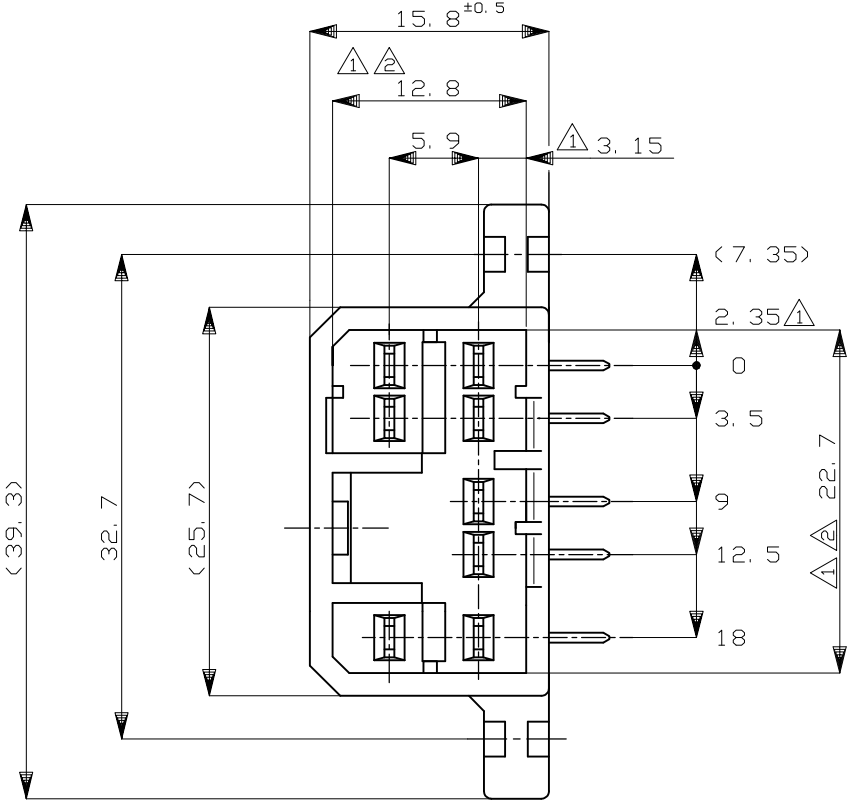


LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
J	—		J7	REVISED	ECR-15-006110	21APR15	KF	RK

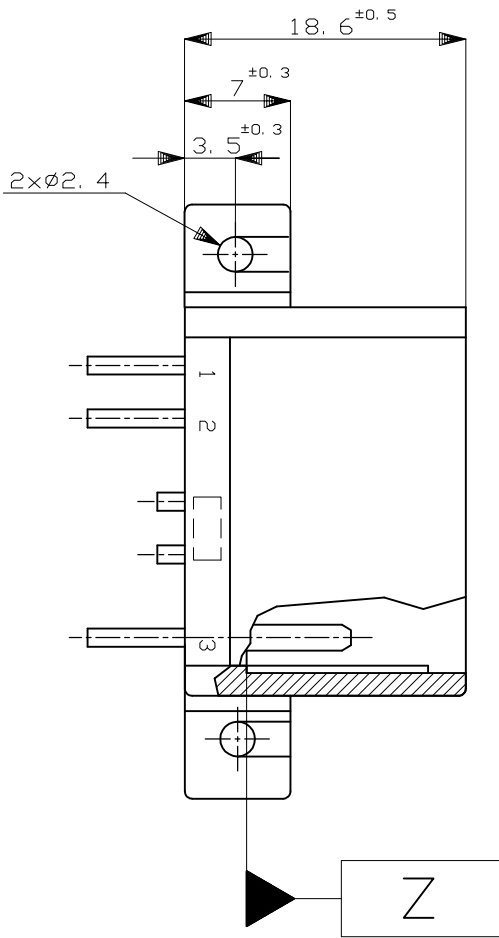

- △ Z 面より2mmの範囲で測定。
- △ 相手ハウジングと所定の機能を満足して嵌合できること
- 3. プリント基板への取付は、JIS B1115又は1122, M3×6ナベ (2種又は4種) のタッピンネジで締付けた後ハンダ付する (締付けトルク: 0.4N-m 以下)
- △ 回路番号; 右図参照のこと。



- △ TO BE MEASURED BETWEEN Z AND 2
- △ TO BE MATE WITH PLUG HSG SMOOTHLY
- 3. TO BE USE M3 TAPPING SCREW JIS B1115 OR 1122 (TYPE 2 OR 4) BEFORE SOLDER (TIGHTENING TORQUE; 0.4N-m MAX.)
- △ CIRCUIT NUMBER

	HB	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 8	1~8 (全極)	-	NATURAL 自然色	1-5173856-1		
	HB	PRE-TIN × 2		-	4,8 (2極)	NATURAL 自然色	5-173856-1		
	V-0	PRE-TIN × 8		-	1~8 (全極)	NATURAL 自然色	4-173856-1		
	HB	PRE-TIN × 6		-	1~4,6,8 (6極)	GRAY 灰色	2-173856-6		
	SEE 3-173856-1						3-173856-1		
OBSOLETE	V-2	PRE-TIN × 8		-	1~8 (全極)	NATURAL 自然色	9-173856-1		
	HB	PRE-TIN × 5		-	4~8 (5極)	NATURAL 自然色	2-173856-1		
		PRE-TIN × 8		-	1~8 (全極)	GRAY 灰色	173856-6		
		TIN-LEAD	SELECTIVE GOLD × 8	1~8 (全極)	-	NATURAL 自然色	1-173856-1		
		PRE-TIN × 8		-	1~8 (全極)	BLUE 青色	173856-5		
		PRE-TIN × 8		-	1~8 (全極)	GREEN 緑色	173856-4		
		PRE-TIN × 8		-	1~8 (全極)	NATURAL 自然色	173856-1		
USED MATERIAL FLAMMABILITY	SOLDERING SIDE 半田付け面		CONTACT SIDE 接触部側		△ GOLD PLATED CIRCUIT NO. 金めっき回路番号		△ PRE-TIN CIRCUIT NO. 錫めっき回路番号	COLOR 色	PART NUMBER 製品型番
	CONTACT FINISH コンタクト仕上								

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN T.SHINOHARA	19SEP03	TE Connectivity	
				CHK K.BETSUI	19SEP03		
				APVD K.BETSUI	19SEP03	NAME 名称 070 SERIES MULTI-LOCK CONNECTOR 8POSITION CAP HOUSING ASSEMBLY	
				PRODUCT SPEC 製品規格 108-5216			
				APPLICATION SPEC 取付適用規格 —		SIZE A2	CAGE CODE 00779
				WEIGHT 5.55g		DRAWING NO 番号 C=173856	RESTRICTED TO —
CUSTOMER DRAWING				SCALE 尺度 2:1	SHEET 1 of 1	REV J7	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[173856-5](#)