
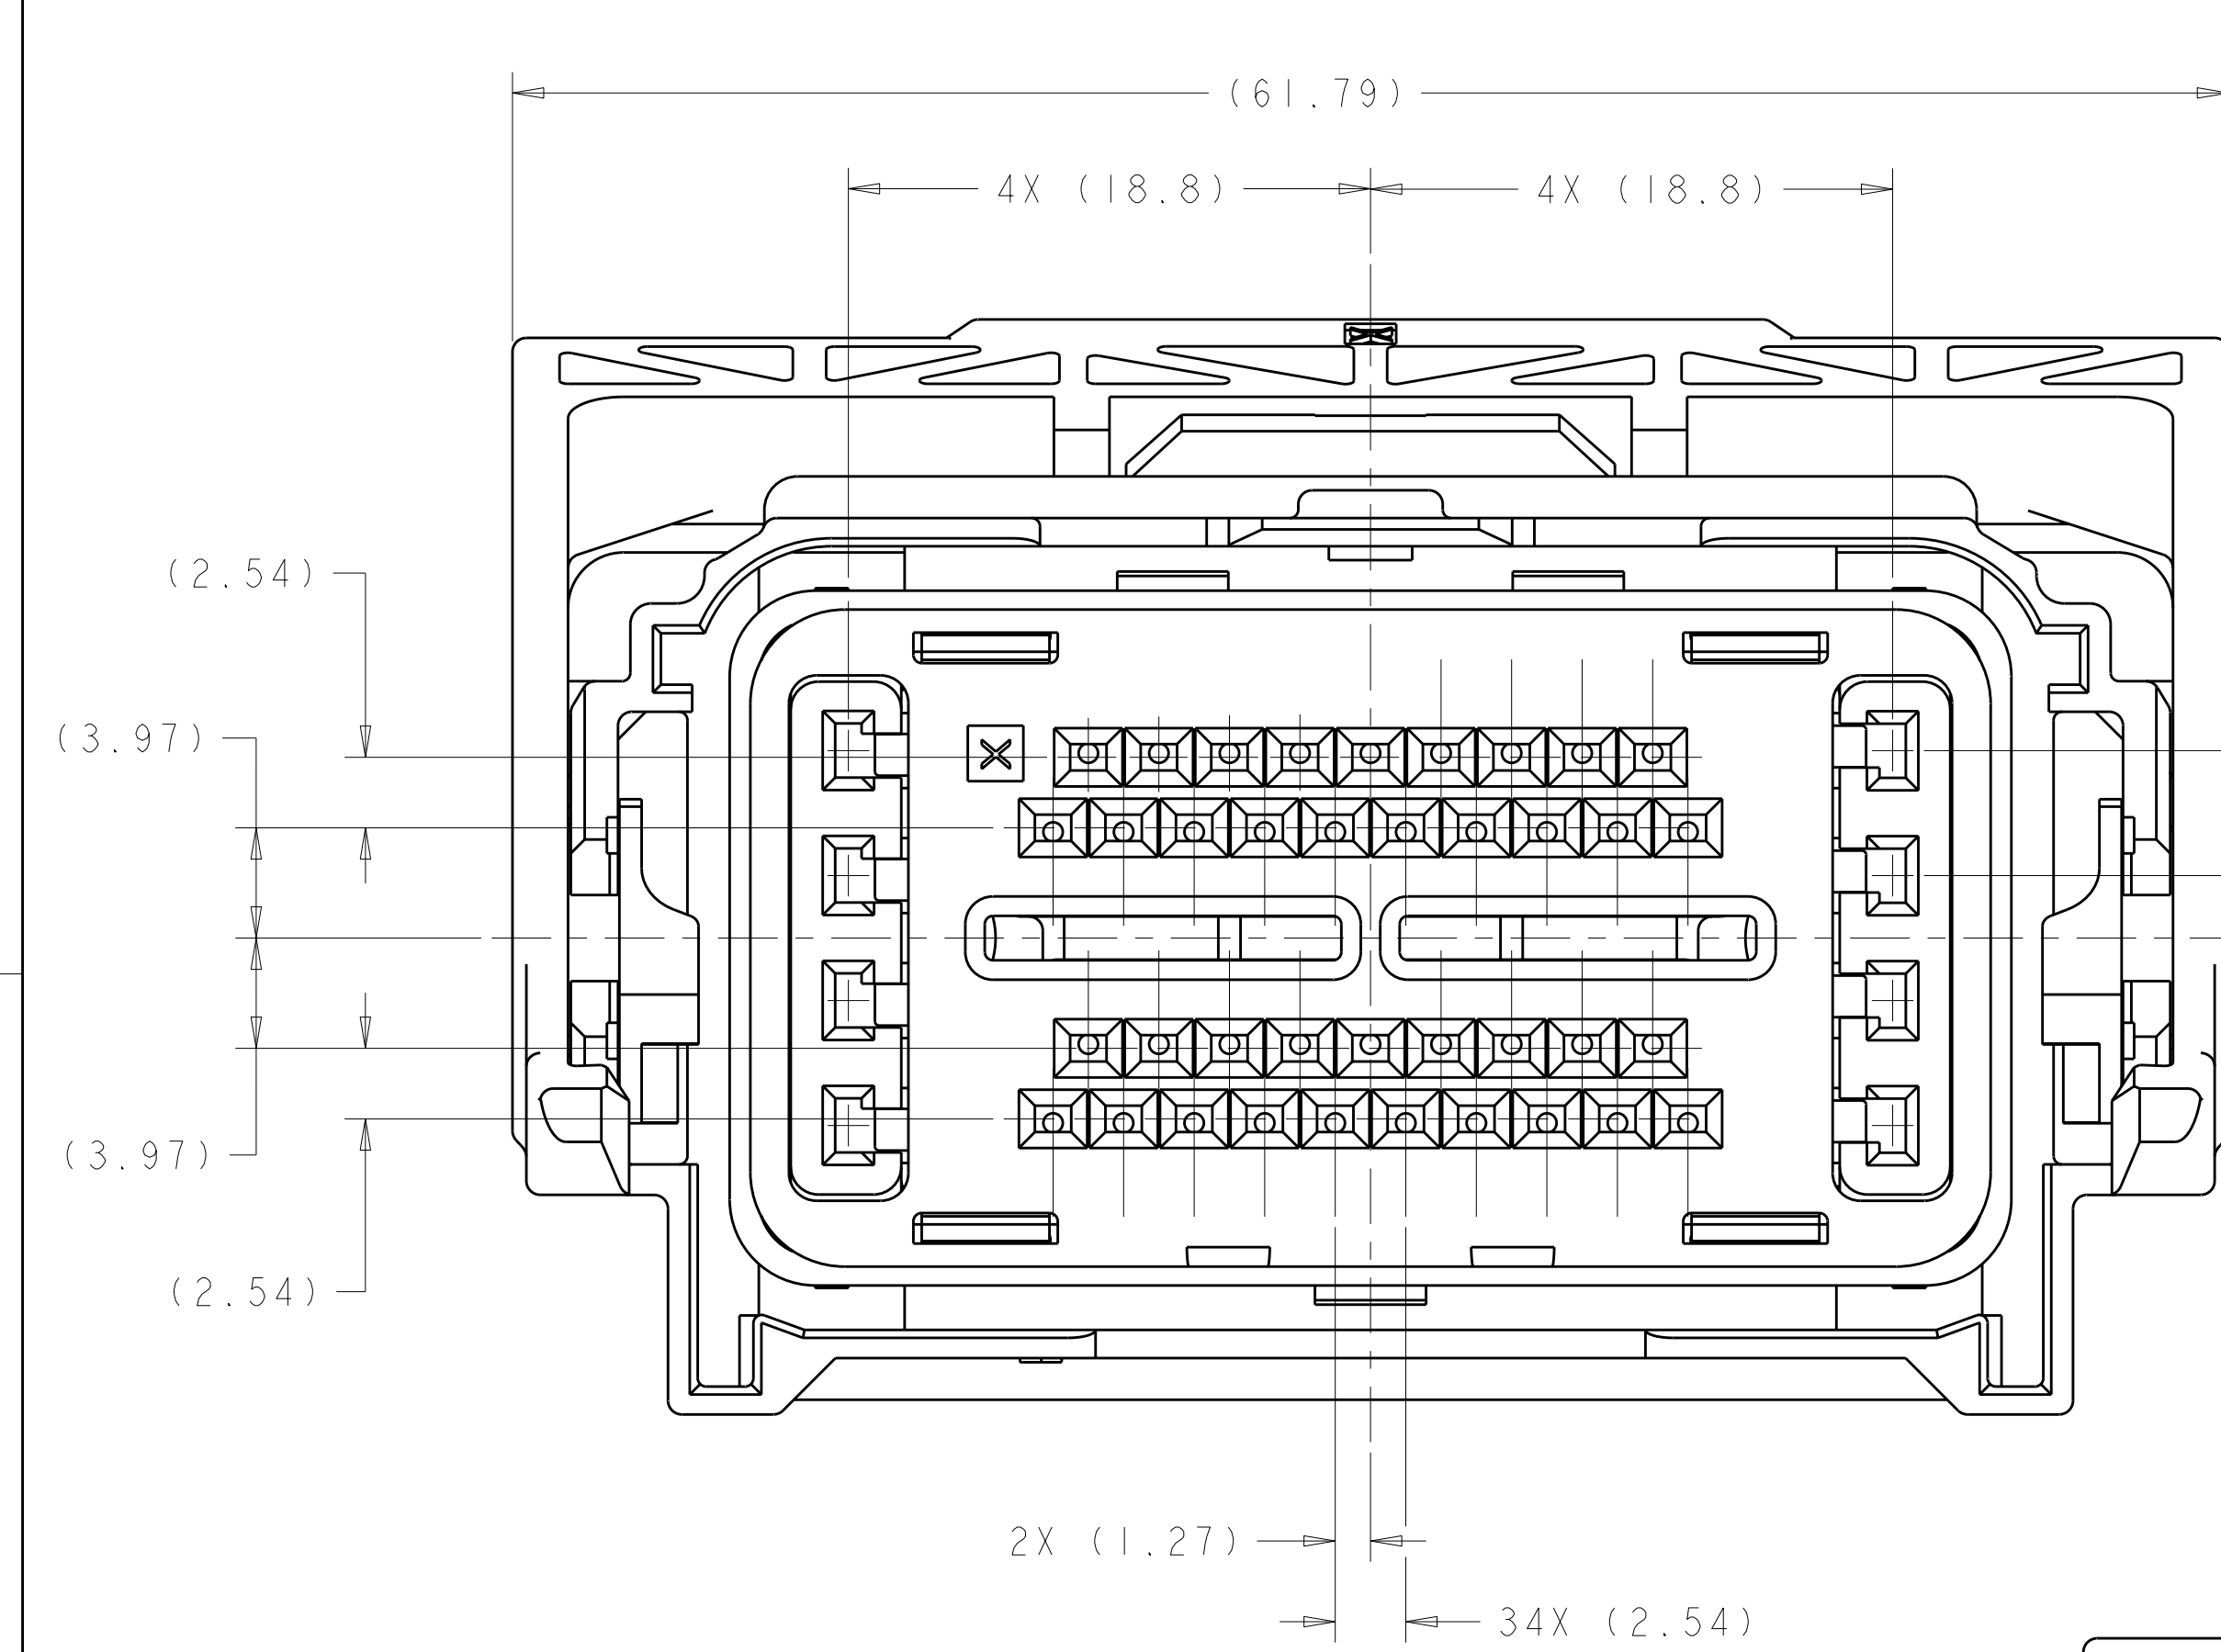
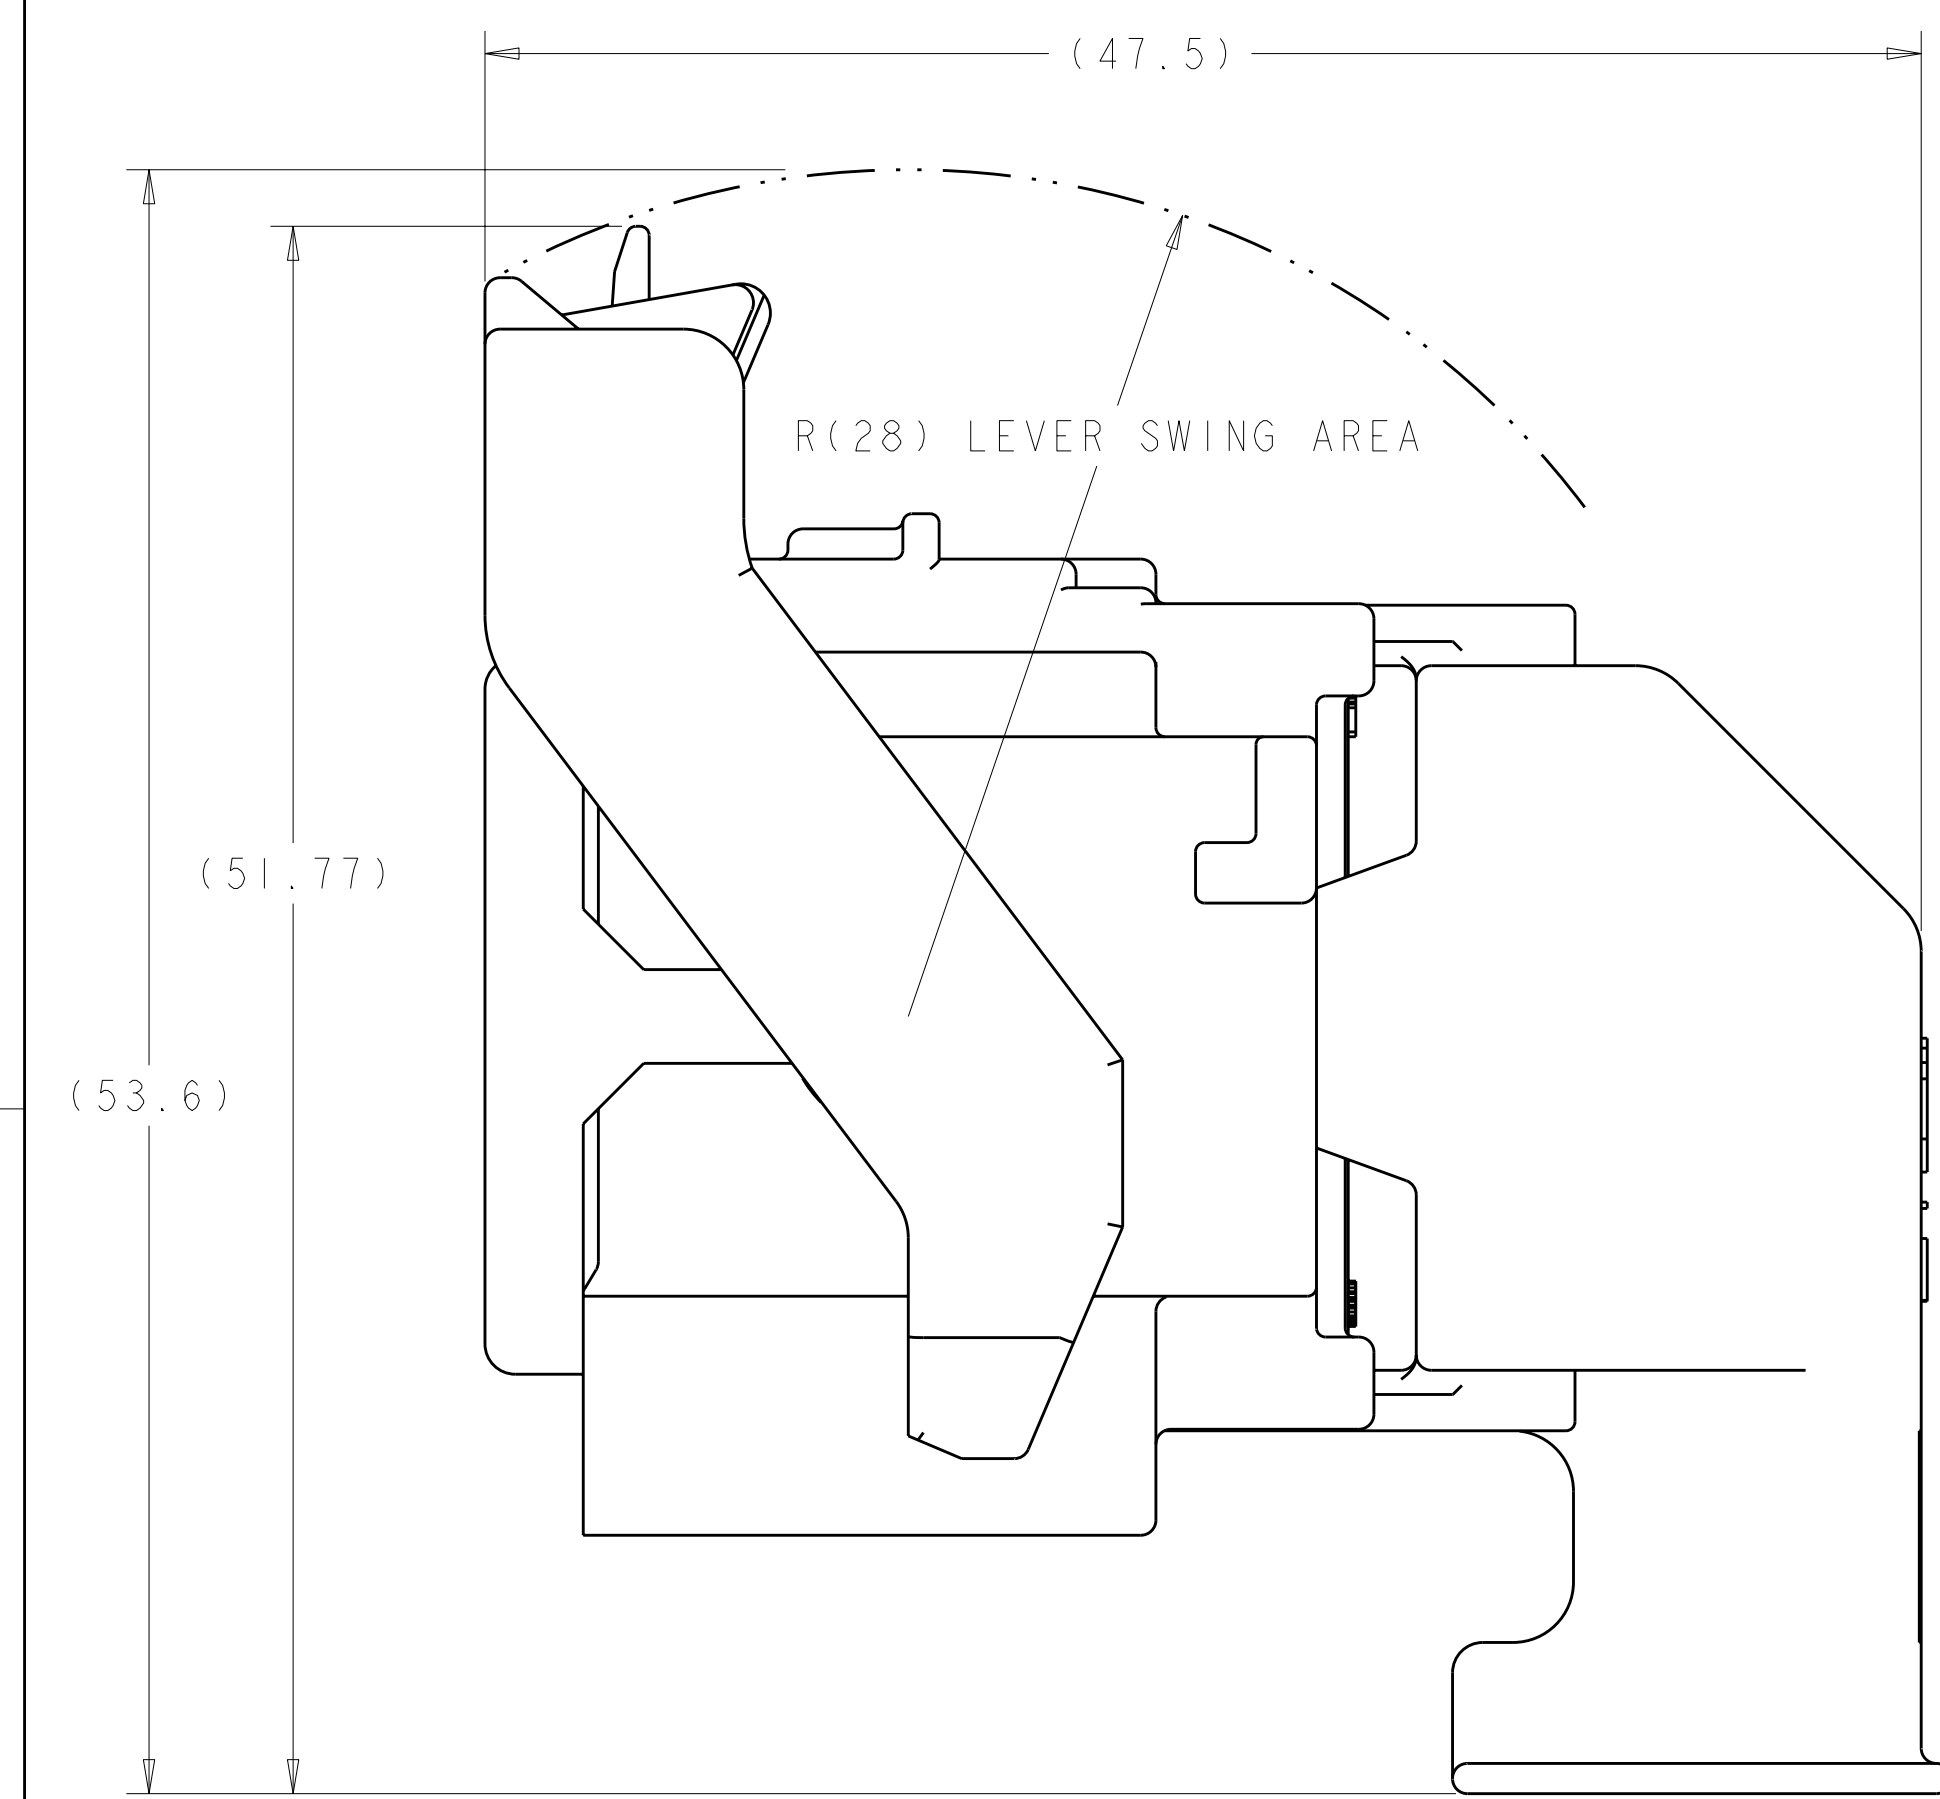



LOC		DIST		REVISIONS						
FX		00		P	LTR	DESCRIPTION	DATE	DWN	APVD	
				S10		REVISED PER ECO-09-009758	23APR2009	DLD	DCM	
				S11		REVISED PER ECO-09-028550	29DEC2009	DLD	DCM	




KEYING OPTION "A"
1438082-1 ³



SHOWN WITH CAM LEVER AND SPACER
IN LOADED POSITION WITH
OPTIONAL WIRESHIELD

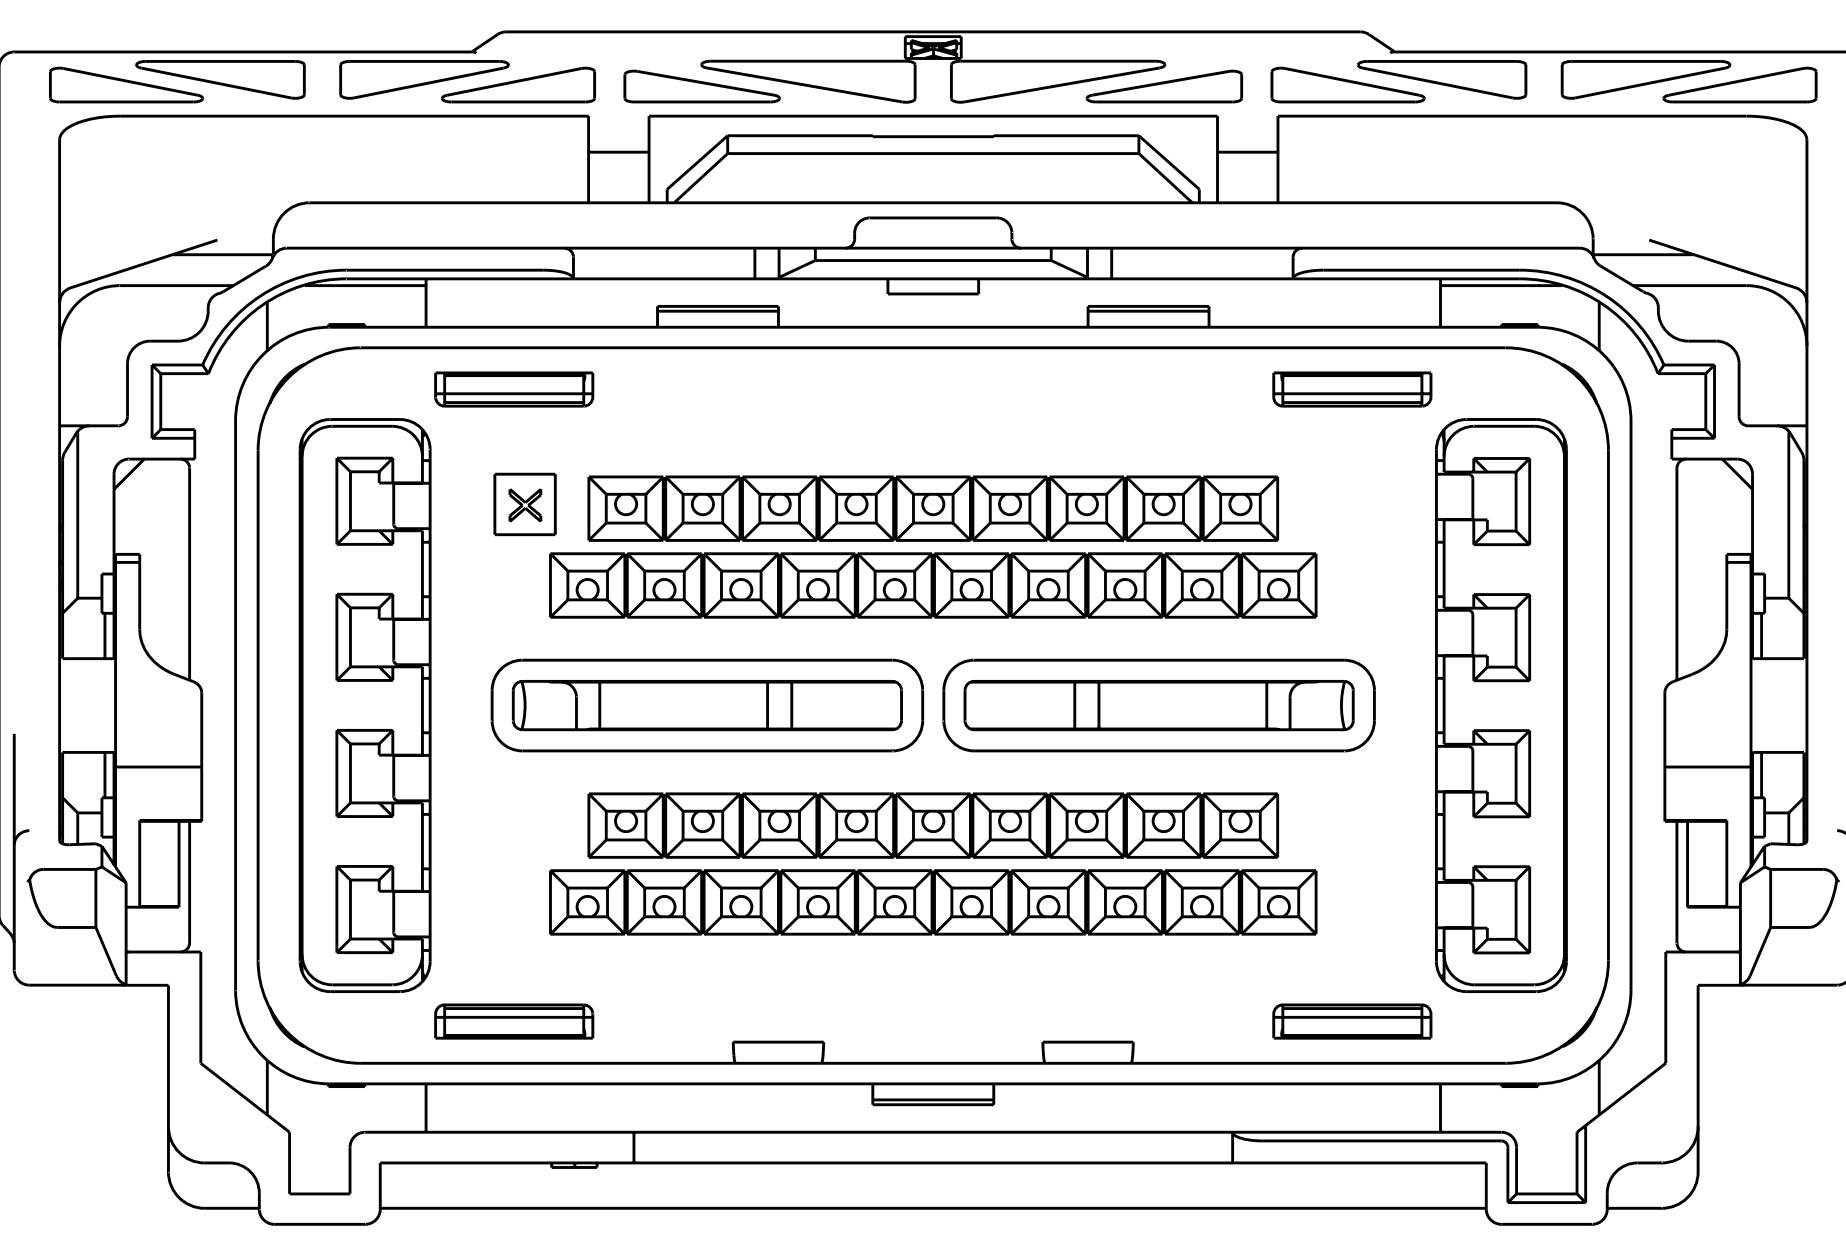


KEYING OPTION "B"
1438082-2 ³

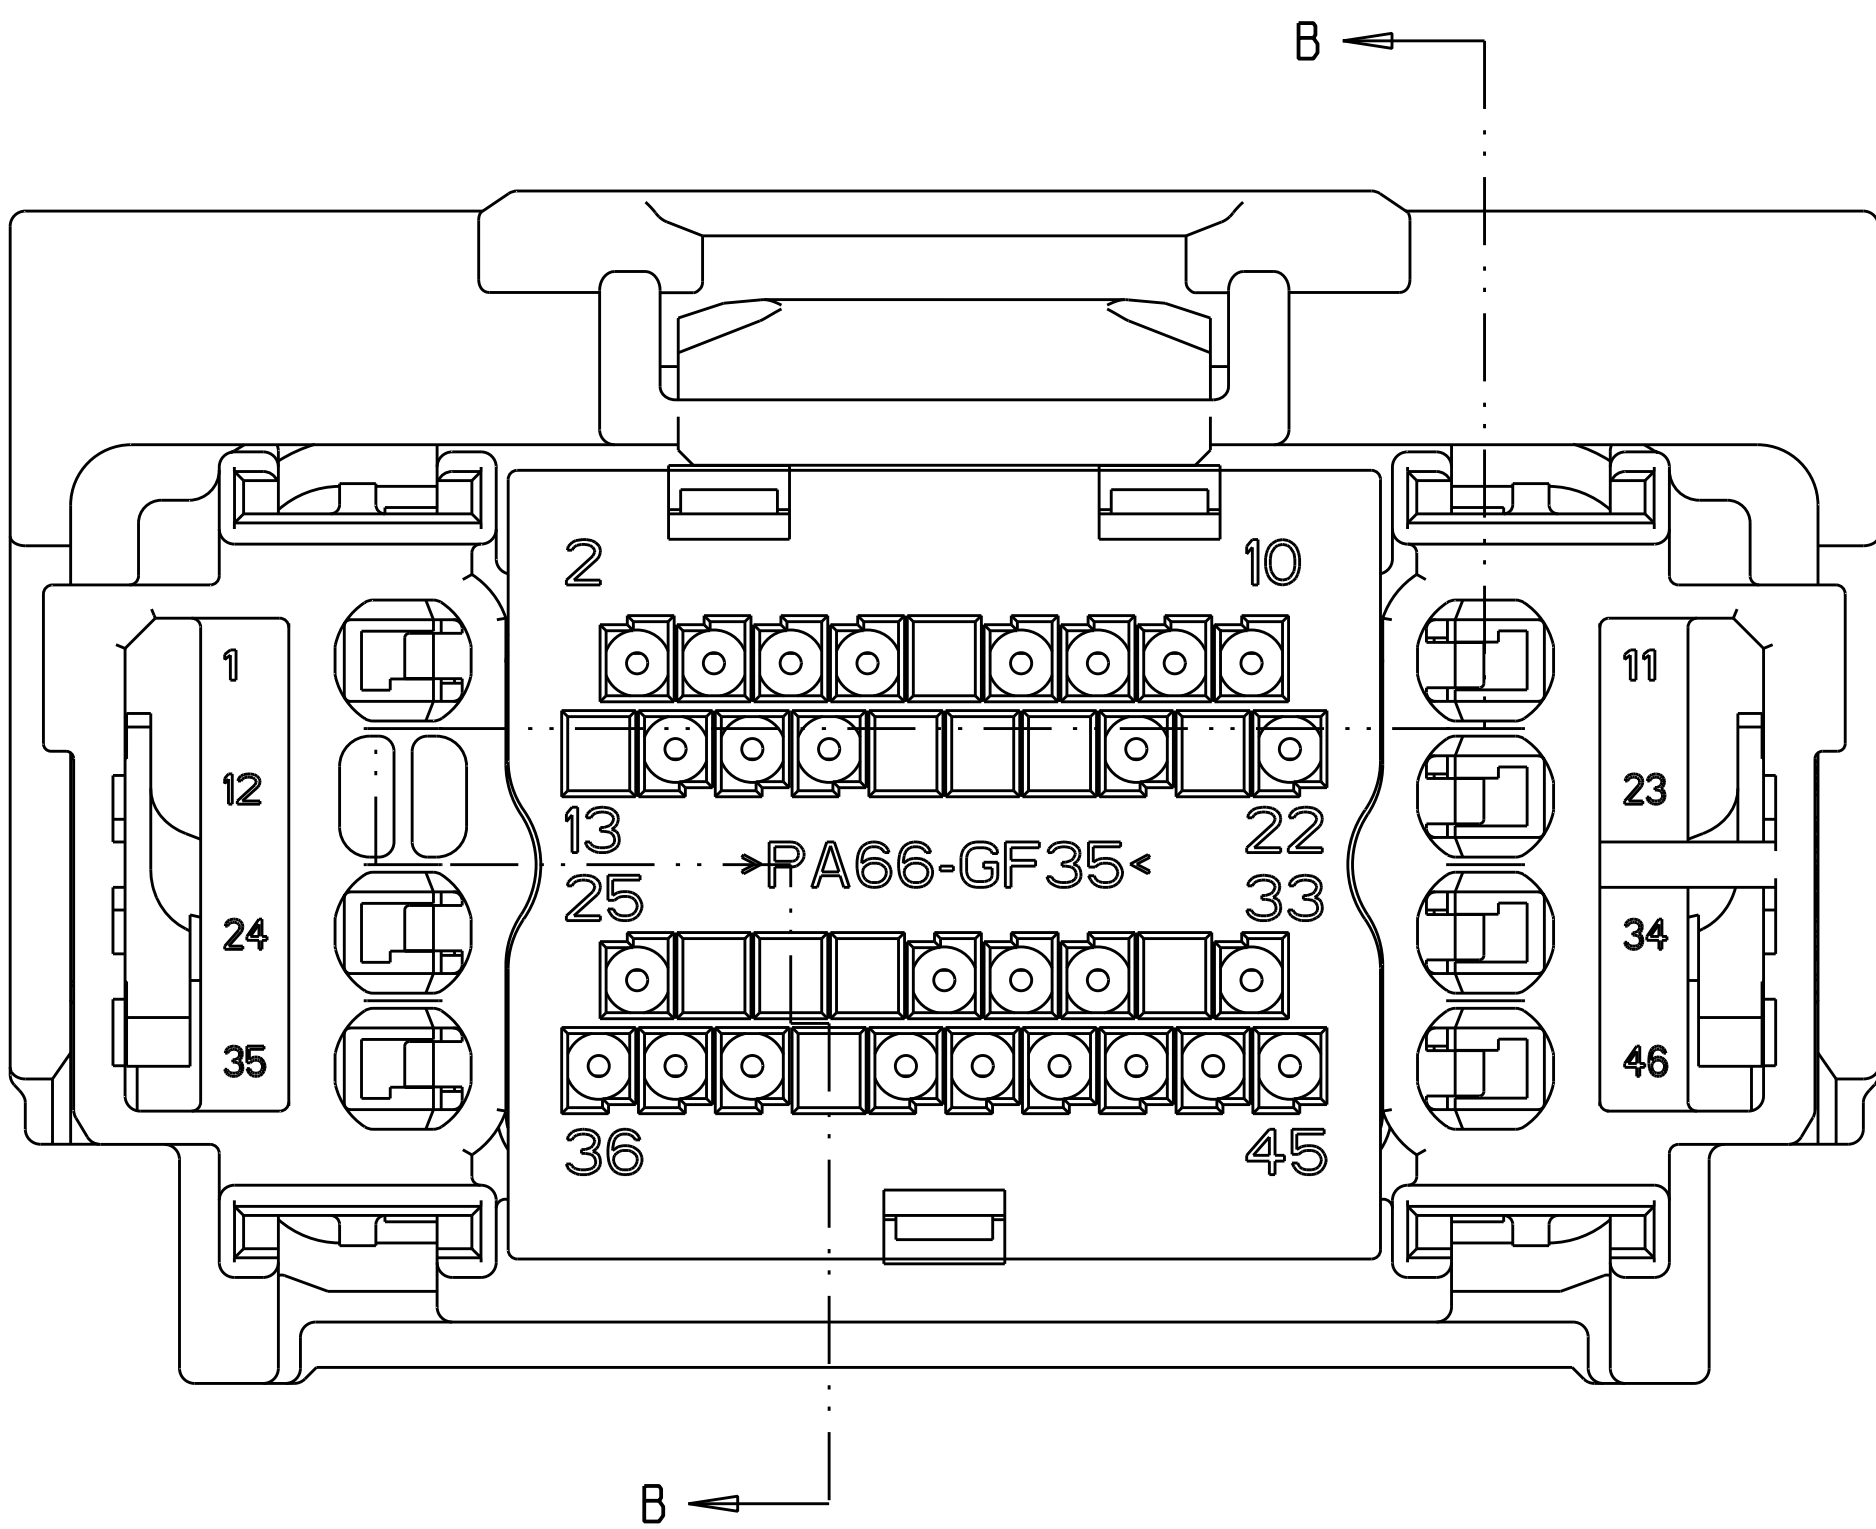


- ³ MATERIAL:
- HARNESS - 35% GLASS FILLED PA66, BLACK
 - ALT MAT'L: HARNESS - 30% GLASS FILLED sPS, BLACK
 - SPACER - 40% GLASS FILLED PPS+PA66, RED
 - ALT MAT'L: 30% GLASS FILLED sPS, RED
 - ALT MAT'L: 35% GLASS FILLED PA66, RED
 - COVER - 35% GLASS FILLED PA66, BLACK
 - ALT MAT'L: COVER - 30% GLASS FILLED LCP, BLACK
 - CAM LEVER - 35% GLASS FILLED NYLON, GRAY
 - GROMMET - SILICONE, BROWN
 - PERIMETER SEAL - SILICONE, GREEN


2. CAM LEVER AND SPACER ARE SHIPPED IN PRE-LATCH POSITION.
- ³ SEE PINOUT CHART ON SHEETS 2, 3 AND 4 FOR CLOSED CIRCUIT CONFIGURATIONS.
- ⁴ CAVITIES WITH A NUMERIC SYMBOL INDICATES CLOSED TERMINAL LOCATIONS. BLANK CAVITIES INDICATE OPEN TERMINAL HOLE LOCATIONS.

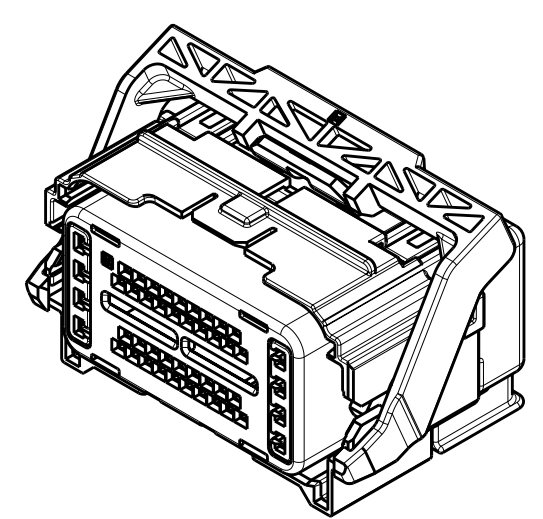

SCALE 1:1

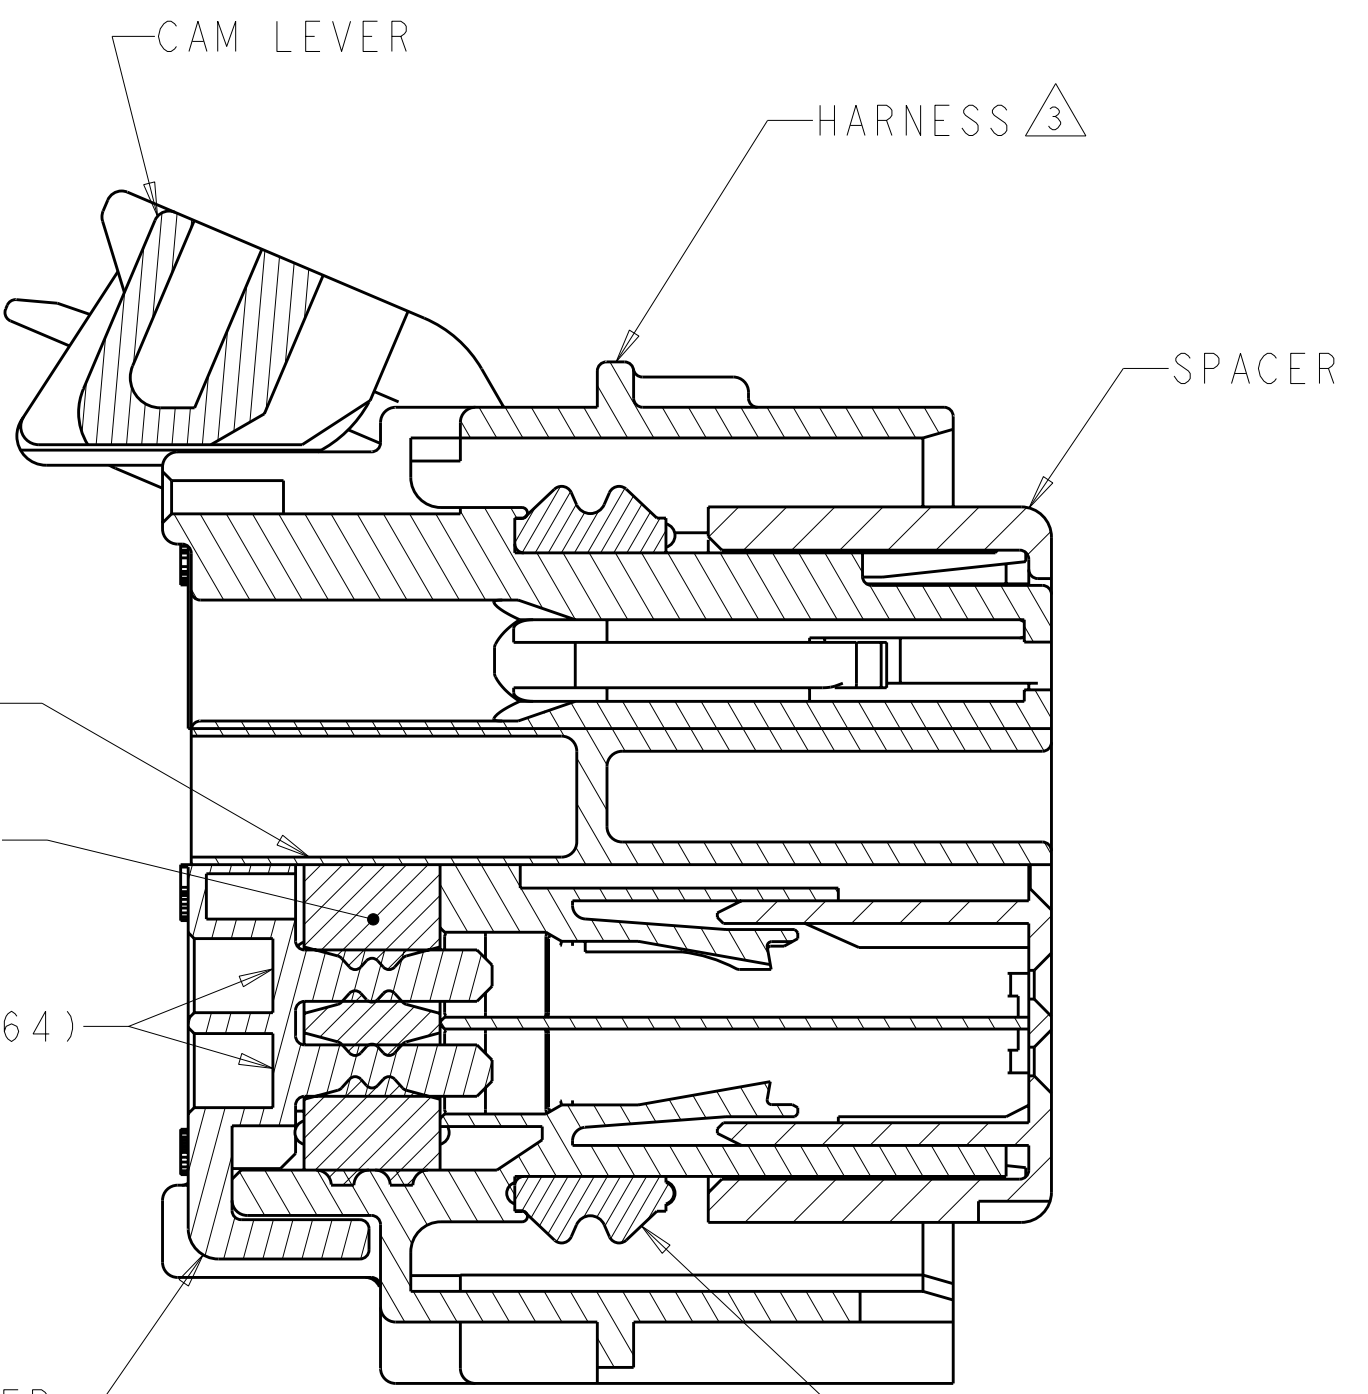

SECTION B-B

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TICO ELECTRONICS CORPORATION IT IS SUBJECT TO THE TICO ELECTRONICS CORPORATION ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		OWN R. VESTAL CHK D. STRAUSSER APVD D. STRAUSSER		01AUG2003 01AUG2003 01AUG2003	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.3 3 PLC ±.3 2 PLC ±0.10 3 PLC ±. 4 PLC ±. ANGLES ±.3°		PRODUCT SPEC - APPLICATION SPEC	
MATERIAL SEE TABLE		FINISH SEE TABLE		WEIGHT -	
				CUSTOMER DRAWING	
				SIZE A	
				CAGE CODE 00779	
				DRAWING NO C-1438082	
				RESTRICTED TO -	
				SCALE 4:1	
				SHEET 1	
				OF 5	
				REV 1	

[illegible][illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[9-1438082-3](#)