


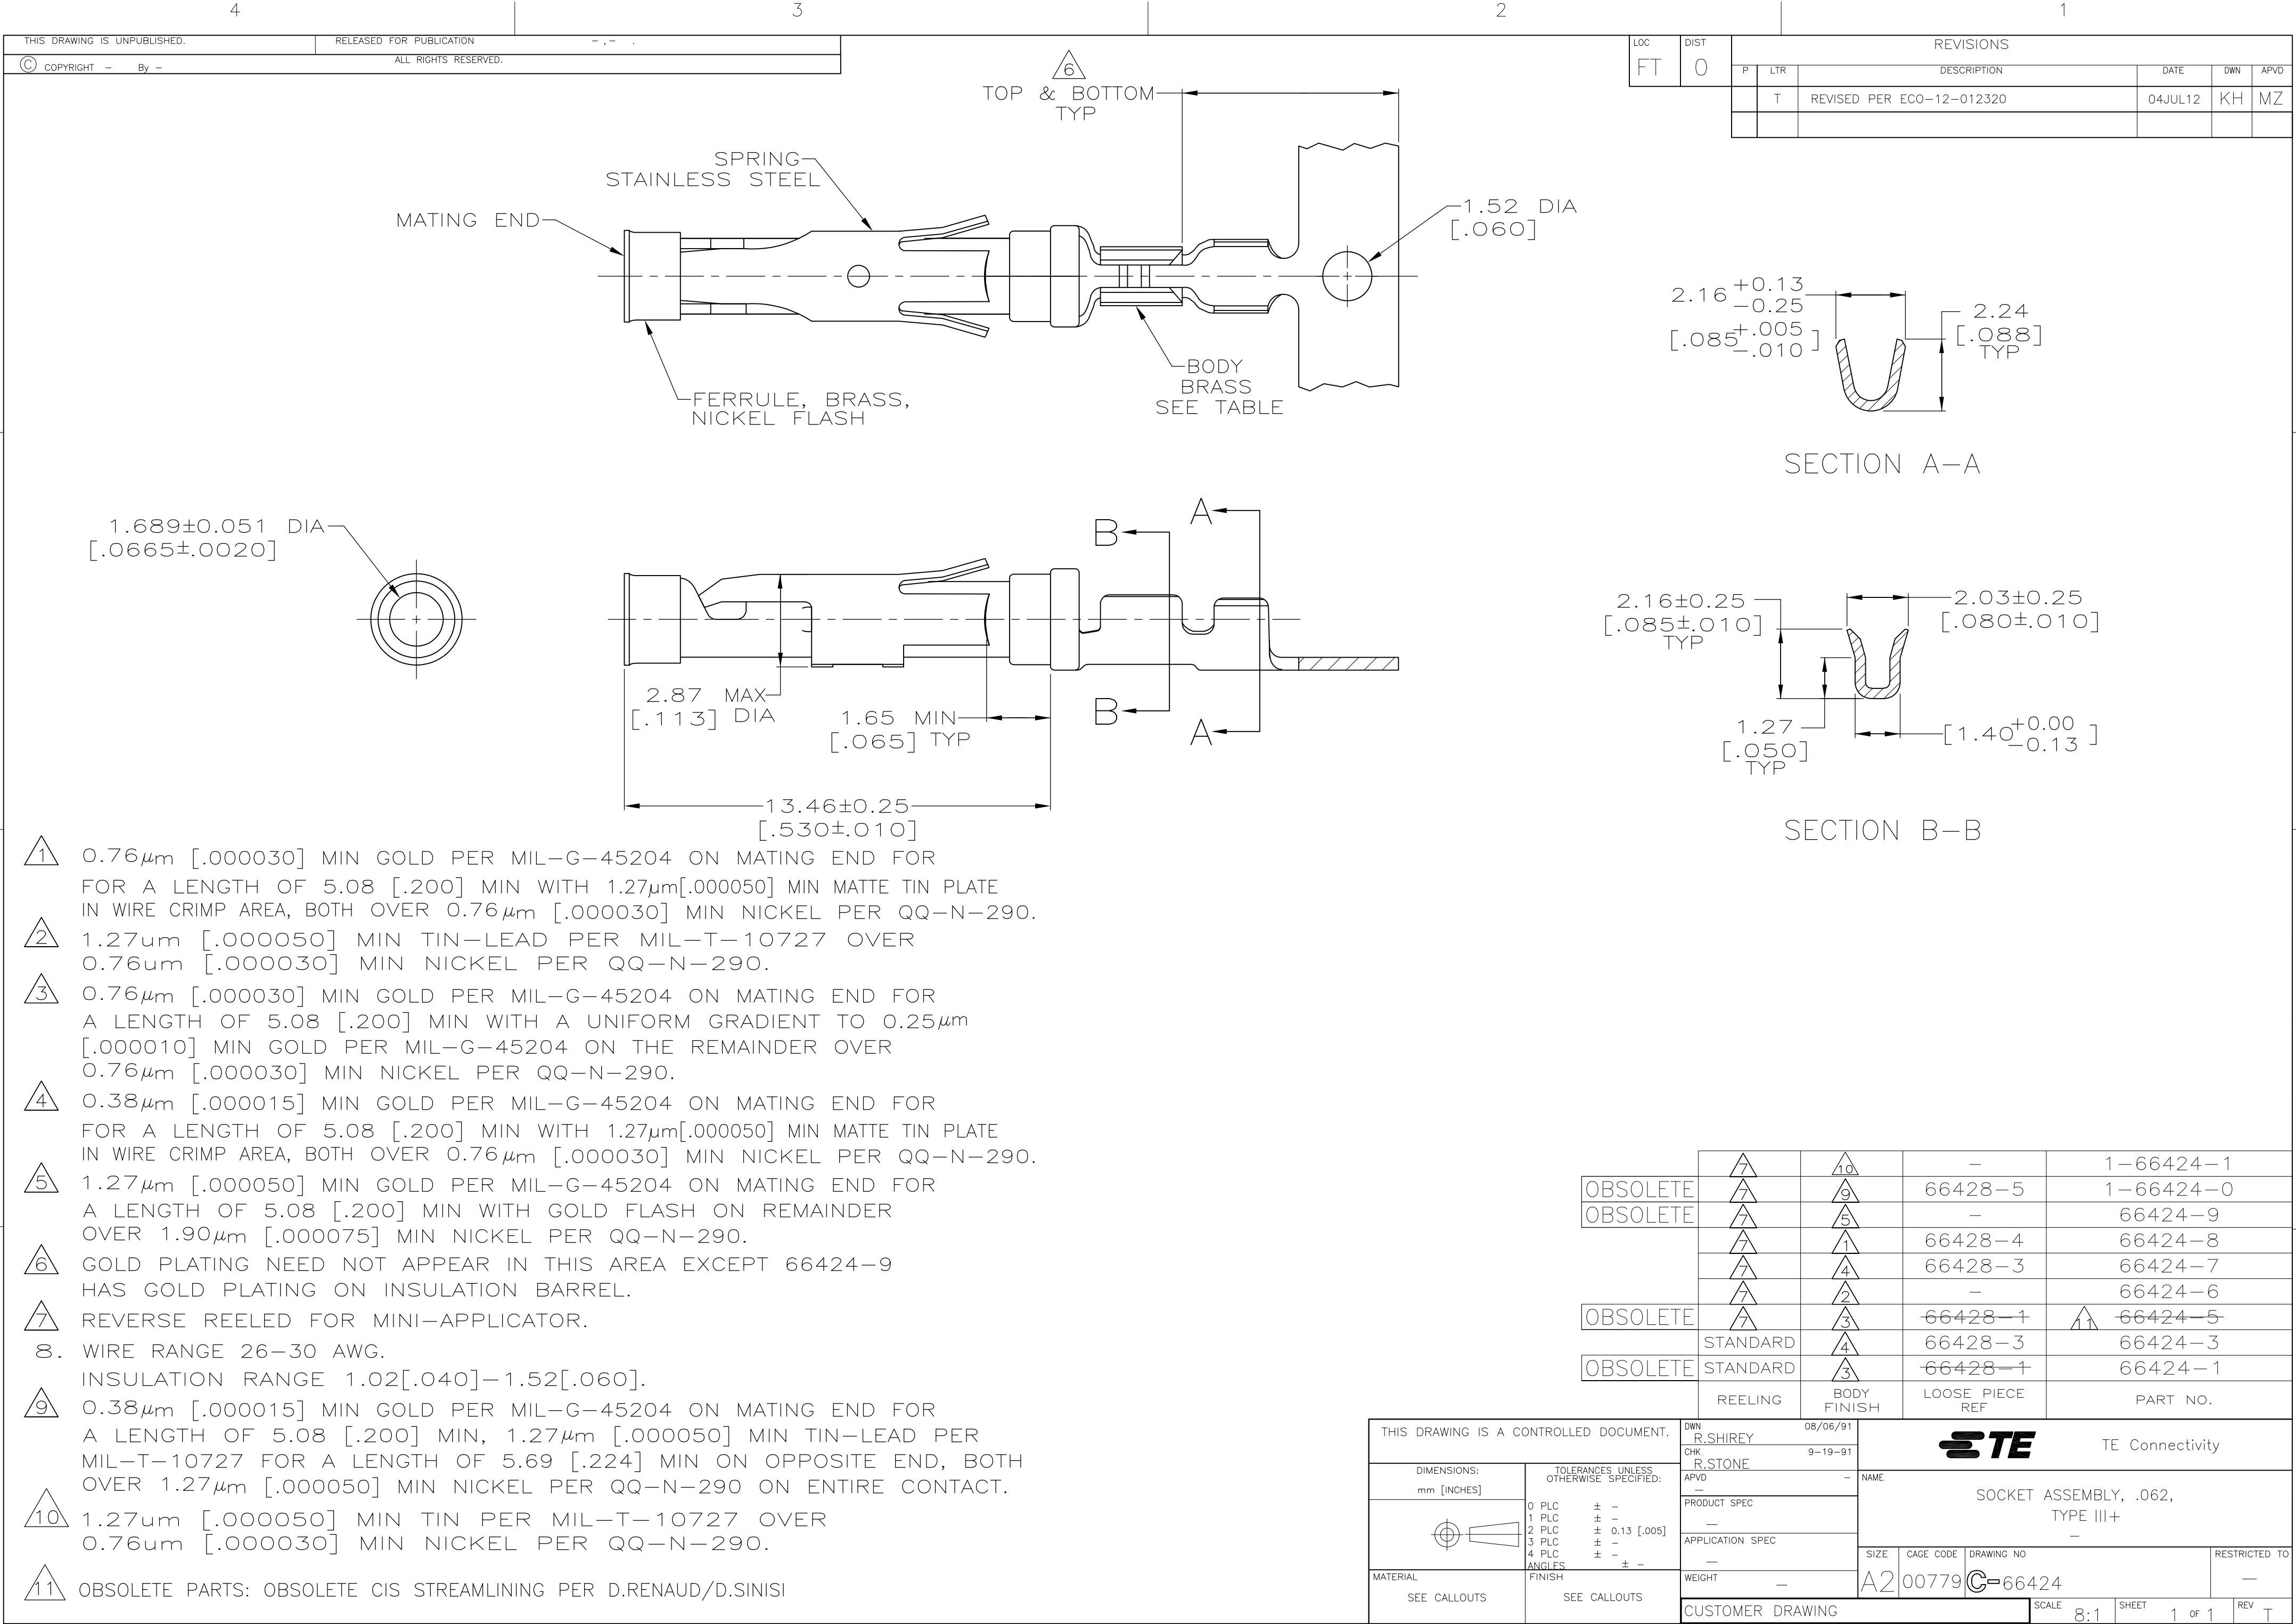

- 1 0.76μm [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR FOR A LENGTH OF 5.08 [.200] MIN WITH 1.27μm [.000050] MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER 0.76μm [.000030] MIN NICKEL PER QQ-N-290.
- 2 1.27μm [.000050] MIN TIN-LEAD PER MIL-T-10727 OVER 0.76μm [.000030] MIN NICKEL PER QQ-N-290.
- 3 0.76μm [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH A UNIFORM GRADIENT TO 0.25μm [.000010] MIN GOLD PER MIL-G-45204 ON THE REMAINDER OVER 0.76μm [.000030] MIN NICKEL PER QQ-N-290.
- 4 0.38μm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR FOR A LENGTH OF 5.08 [.200] MIN WITH 1.27μm [.000050] MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER 0.76μm [.000030] MIN NICKEL PER QQ-N-290.
- 5 1.27μm [.000050] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH GOLD FLASH ON REMAINDER OVER 1.90μm [.000075] MIN NICKEL PER QQ-N-290.
- 6 GOLD PLATING NEED NOT APPEAR IN THIS AREA EXCEPT 66424-9 HAS GOLD PLATING ON INSULATION BARREL.
- 7 REVERSE REELED FOR MINI-APPLICATOR.
- 8. WIRE RANGE 26-30 AWG. INSULATION RANGE 1.02 [.040]-1.52 [.060].
- 9 0.38μm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN, 1.27μm [.000050] MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 5.69 [.224] MIN ON OPPOSITE END, BOTH OVER 1.27μm [.000050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.
- 10 1.27μm [.000050] MIN TIN PER MIL-T-10727 OVER 0.76μm [.000030] MIN NICKEL PER QQ-N-290.
- 11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

LOC		DIST		REVISIONS					
FT		0		P	LTR	DESCRIPTION	DATE	DWN	APVD
				T		REVISED PER ECO-12-012320	04JUL12	KH	MZ

A

SECTION A-A

SECTION B-B

			—	1-66424-1
OBSOLETE			66428-5	1-66424-0
OBSOLETE			—	66424-9
			66428-4	66424-8
			66428-3	66424-7
			—	66424-6
OBSOLETE			66428-1	66424-5
	STANDARD		66428-3	66424-3
OBSOLETE	STANDARD		66428-1	66424-1
	REELING	BODY FINISH	LOOSE PIECE REF	PART NO.

LED DOCUMENT.		DWN	08/06/91	TE Connectivity	
		CHK	9-19-91		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME	
		—			
± —		PRODUCT SPEC		SOCKET ASSEMBLY, .062, TYPE III+	
± —		—			
± 0.13 [.005]		APPLICATION SPEC		—	
± —		—			
± —		WEIGHT		SIZE	
—		—		CAGE CODE	
SEE CALLOUTS		A2		DRAWING NO	
		00779		RESTRICTED TO	
		C=66424		—	
		CUSTOMER DRAWING		SCALE	
				8:1	
				SHEET	
				1 OF 1	
				REV	
				T	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[66424-6](#)