







NOTES:

1. MATERIALS OF CONSTRUCTION:
BODY, HEX NUT = BRASS (ASTM-B16 H02, C36000), NICKEL PLATED (.000100 MIN OVER COPPER STRIKE)
CONTACT PIN = PHOSPHOR BRONZE (QQ-B-750), GOLD PLATED (.000003 MIN OVER NICKEL .000100 MIN)
FERRULE = COPPER, NICKEL PLATED (.000100 MIN OVER COPPER STRIKE)
INSULATOR = PTFE PER ASTM D 1710 OR EQUIV.
2. CRIMPED FERRULE = HEX CRIMP SIZE .213
HEX CRIMP SIZE FOR CENTER CONTACT .068

81-160	REVISIONS				
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ. 	A	RELEASE TO MFG.	7/21/94	39992	CPM
	E	SEE SHEET I	11/30/00	43596	CPM
	F	SEE SHEET I	9/17/03	44631	CPM

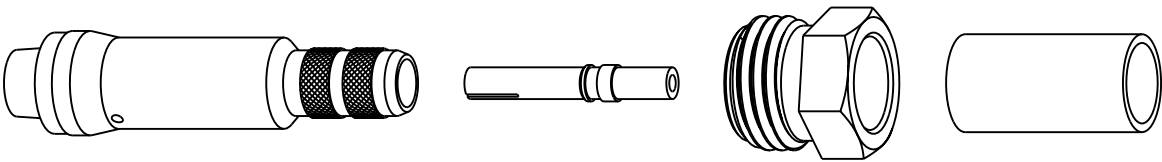

SCALE 2.000

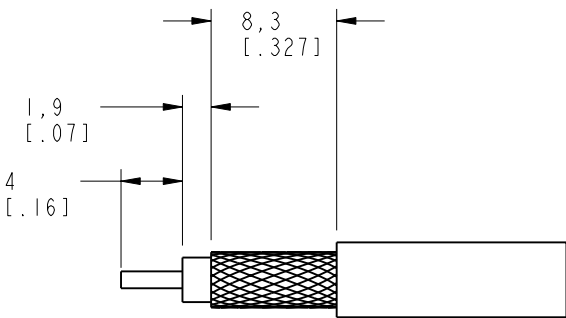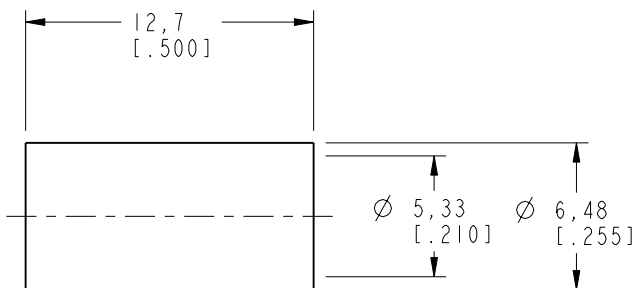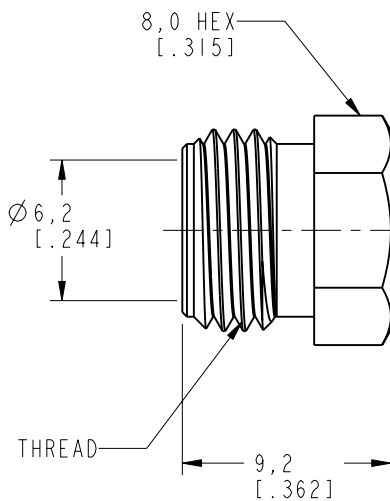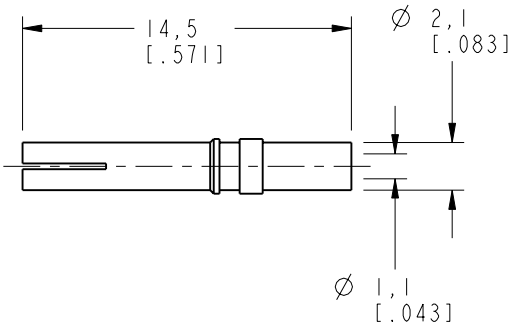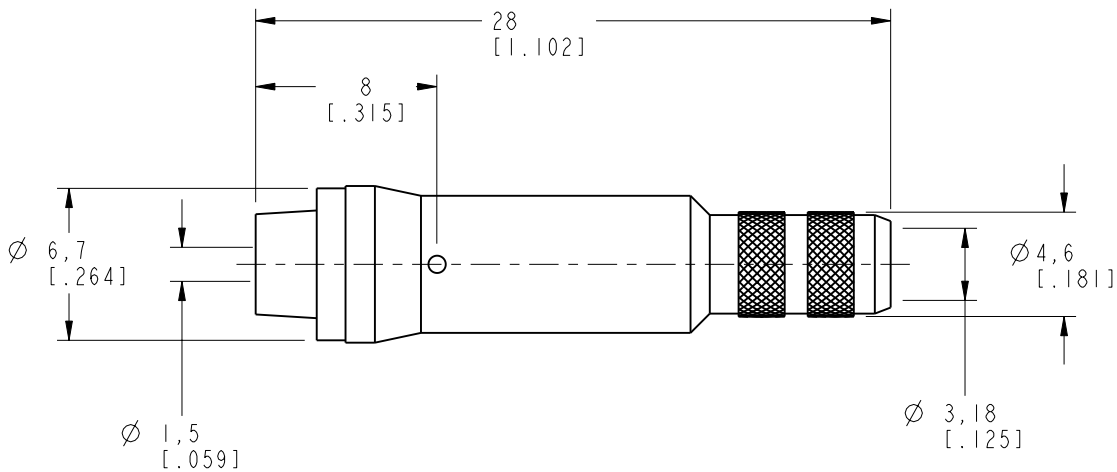

RECOMMENDED CABLE
STRIPPING DIMENSIONS
SCALE 2.000

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

[illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[81-160](#) [081-160](#)