
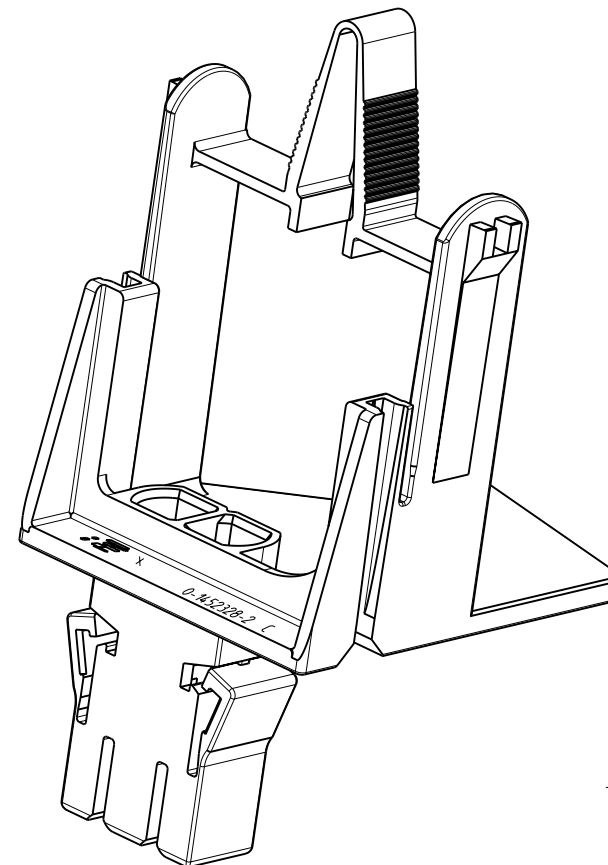
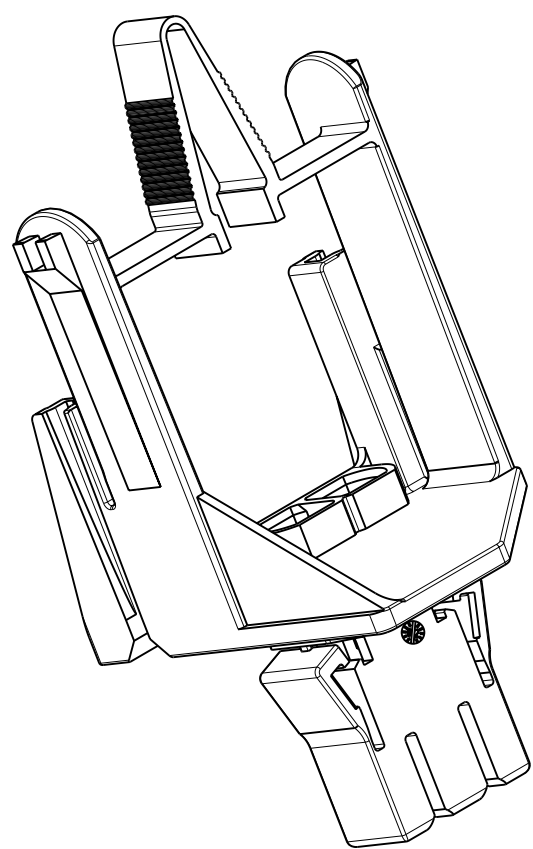
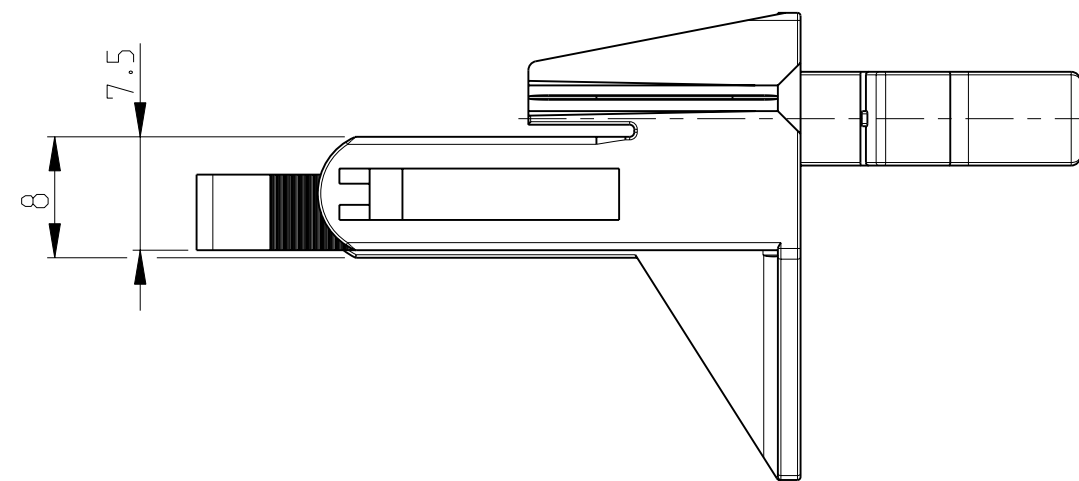
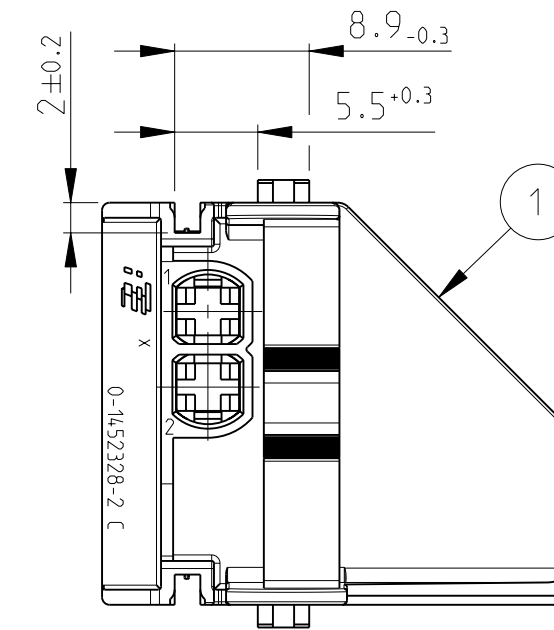
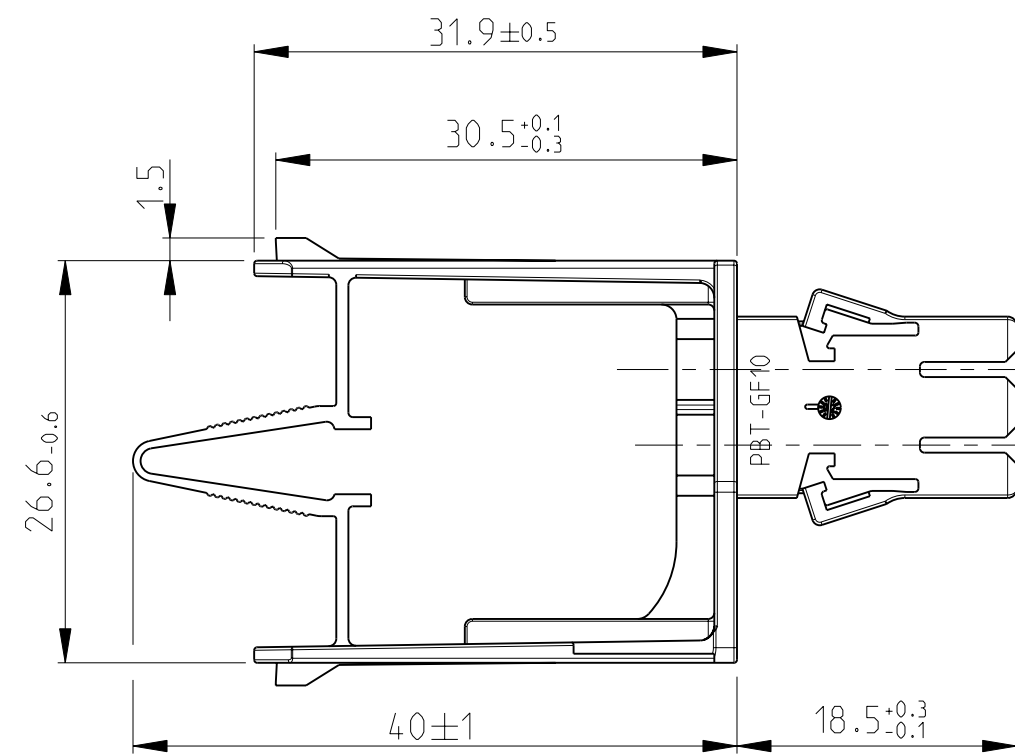


LOC	DIST	REVISIONS					
AI	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	NEW DRAWING	01DEC2011	SH	KR

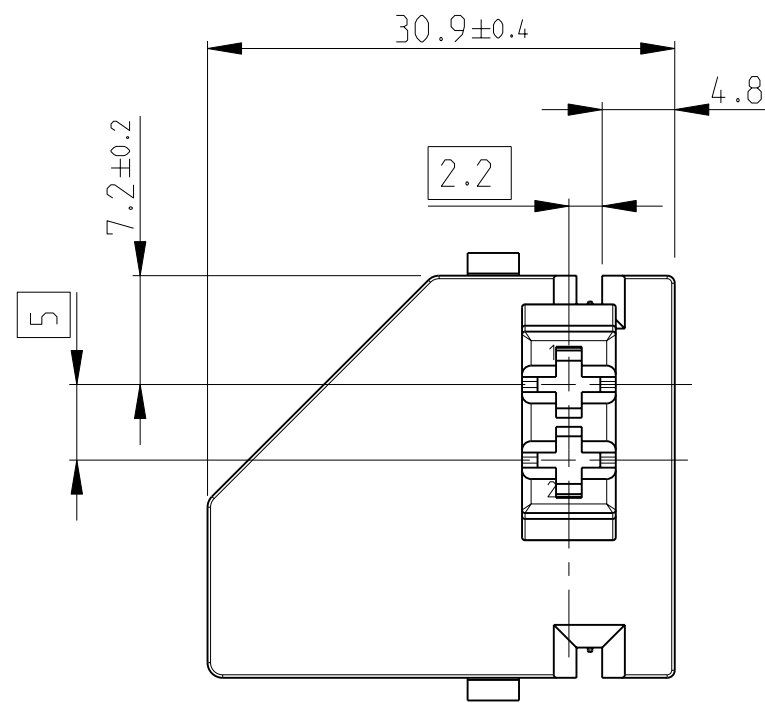

-2 AS SHOWN
wie gezeichnet

NOTES:

Bemerkungen:

- 1 INTERFACE SPEC. SEE BROSE NORM BN 590011-XXX / BN 590025-XXX
Anschlusskragen Spec.: Brose Norm BN 590011-XXX / BN 590025-xxx

APPLICABLE TIN CONTACTS Einsetzbare verzinnte Kontakte	
WIRE SIZE Leiterquerschnitt	TE : PN
0.5-1 mm ²	TE: 0-927771-1
1-2.5 mm ²	TE: 0-927768-1

0-1452328-2	PBT-GF15	BLACK	2 POS. SOCKET HOUSING JPT	1
TE PART NR.	MATERIAL	COLOR	DESCRIPTION	ITEM NR.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SHREESHAIL.H 01DEC2011		 TE Connectivity	
		CHK K.ROTH 01DEC2011			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME 2 POS. SOCKET HOUSING , JPT, RIGHT 2POLIGES BUCHSENGEHAUSE, JPT, RECHTS	
		0 PLC ±0.3 1 PLC ±0.3 2 PLC ±0.3 3 PLC ± 4 PLC ± ANGLES ±°			
MATERIAL		PRODUCT SPEC		RESTRICTED TO	
SEE TABLE		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
		114-18540-1		A2 00779 C=1452328	
		WEIGHT		-	
		CUSTOMER DRAWING		SCALE 2:1 SHEET 1 OF 1 REV	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1452328-1](#)