


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	2 AWG
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric
Wire Strip Length	15/16 in.
Stud Size	1/2 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	BROWN
Panduit Die Index No. on Barrel	P33
Alternate Industry Die Index No. () on Barrel	(10)



Technical drawing of a wire probe assembly. The drawing shows a cylindrical body with two circular features. The left circular feature is labeled "PANDUIT" and "25". The right circular feature is labeled "2 STR CU" and "LCD2-12F". The right end of the assembly is labeled "Wire inspection window". Dimensions are provided for the overall length (.75±.04), the distance from the left end to the first circular feature (.63±.04), the distance between the two circular features (1.75±.02), and the diameter of the right circular feature (.53±.02 DIA (2) PLS).

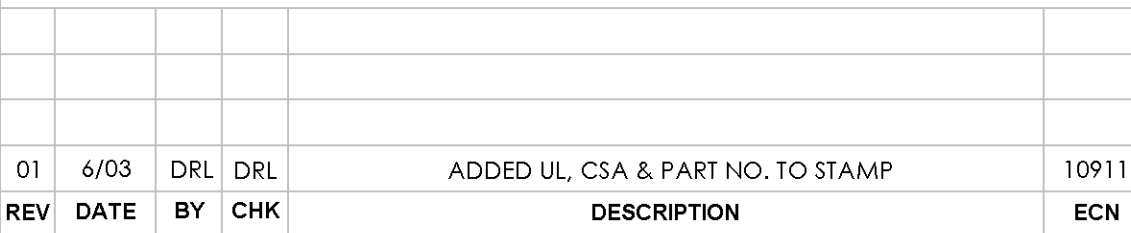

LCD2-12F-Q
Copper Lug - Two-Hole, Standard Barrel, 90° Angle Tongue

SCALE	N/A	DRAWING NO / CAD FILE	LCD2-12F-CUST
-------	-----	-----------------------	---------------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[LCD2-12F-Q](#)