Jul.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

| | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE | | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| △ | | | | | . . | △ | | | | | . . |
| △ | | | | | . . | △ | | | | | . . |
| △ | | | | | . . | △ | | | | | . . |

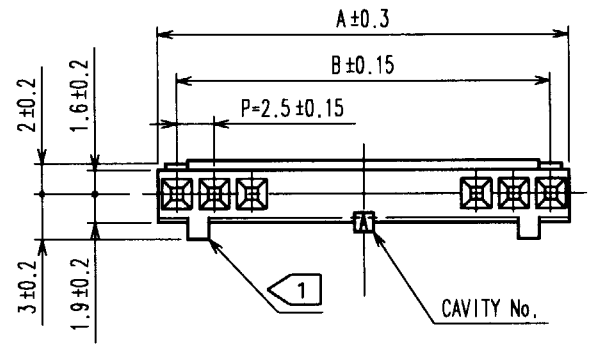


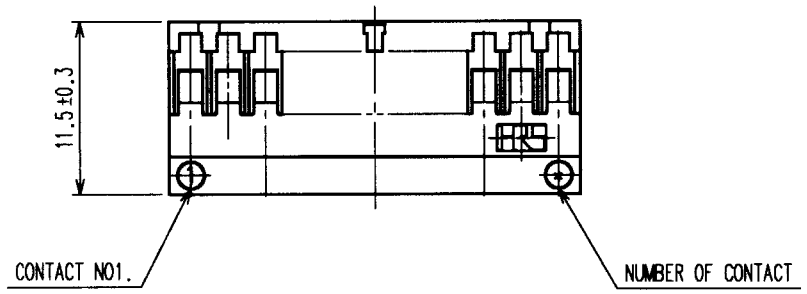


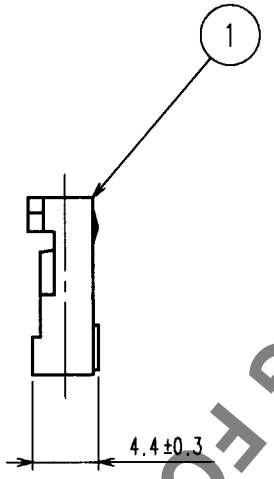


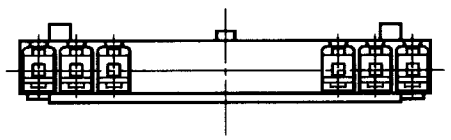

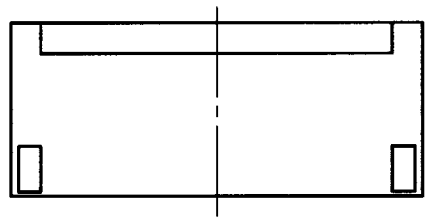

| HRS NO | PART NO | A | B |
|---|---|---|---|
| CL541-0200-6 | DF1B- 2S-2.5R | 5.0 | 2.5 |
| CL541-0201-9 | DF1B- 3S-2.5R | 7.5 | 5.0 |
| CL541-0202-1 | DF1B- 4S-2.5R | 10.0 | 7.5 |
| CL541-0203-4 | DF1B- 5S-2.5R | 12.5 | 10.0 |
| CL541-0204-7 | DF1B- 6S-2.5R | 15.0 | 12.5 |
| CL541-0205-0 | DF1B- 7S-2.5R | 17.5 | 15.0 |
| CL541-0206-2 | DF1B- 8S-2.5R | 20.0 | 17.5 |
| CL541-0207-5 | DF1B- 9S-2.5R | 22.5 | 20.0 |
| CL541-0208-8 | DF1B-10S-2.5R | 25.0 | 22.5 |
| CL541-0209-0 | DF1B-11S-2.5R | 27.5 | 25.0 |
| CL541-0210-0 | DF1B-12S-2.5R | 30.0 | 27.5 |
| CL541-0211-2 | DF1B-13S-2.5R | 32.5 | 30.0 |
| CL541-0212-5 | DF1B-14S-2.5R | 35.0 | 32.5 |
| CL541-0213-8 | DF1B-15S-2.5R | 37.5 | 35.0 |
| CL541-0214-0 | DF1B-16S-2.5R | 40.0 | 37.5 |
| CL541-0215-3 | DF1B-18S-2.5R | 45.0 | 42.5 |
| CL541-0216-6 | DF1B-20S-2.5R | 50.0 | 47.5 |

HRS DRAWING FOR REFERENCE

NOTE 1 2 positions socket have one polarizing slot at senter.
3 TO 6 positions have 2 polarizing slots at both ends.
Other positions have 3 polarizing slots as per drawing.

| NO. | MATERIAL | FINISH, REMARKS |
|---|---|---|
| 1 | POLYAMIDE | NATURAL (WHITE), UL94V-0 |

| CODE NO. (OLD) | DRAWN | DESIGNED | CHECKED | APPROVED | RELEASED |
|---|---|---|---|---|---|
| CL | Y. Inoue '00. 9. 19 | Y. Inoue '00. 9. 19 | T. Mizazaki '00. 9. 19 | K. Katayose '00. 9. 19 | |

| | | |
|---|---|---|
| SCALE 2 : 1 | DRAWING NO. EDC3-160017 | PART NO. DF1B-*S-2.5R |
| UNITS mm | HRS HIROSE ELECTRIC CO., LTD | CODE NO. CL541 — 1/1 |

| TO |
|---|
| |
| |
| |
| |