


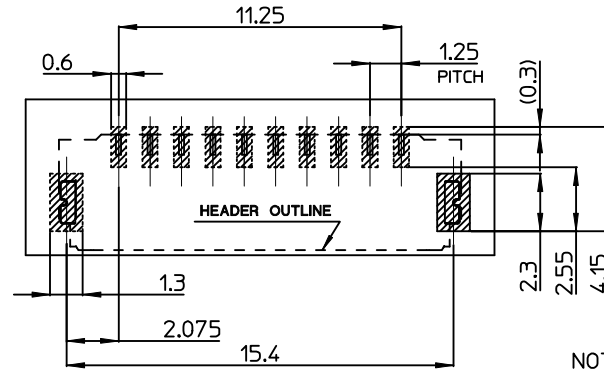
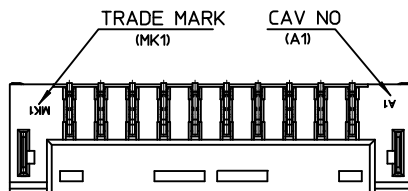
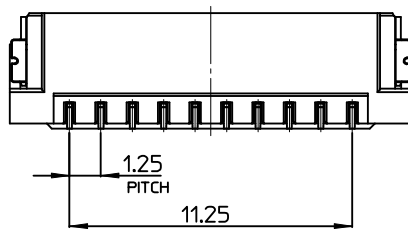
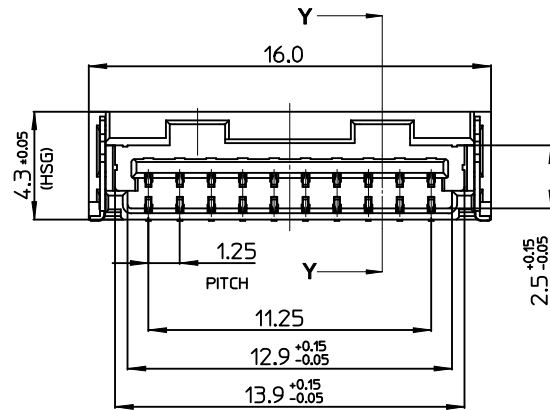
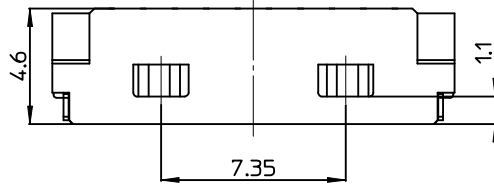


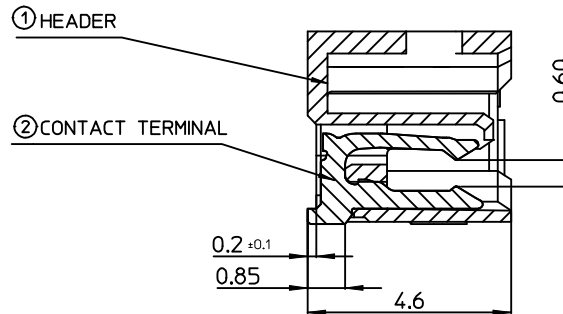

RECOMMEND PATTERN [REF.]
[PCB GENERAL TOLERANCE ±0.05]

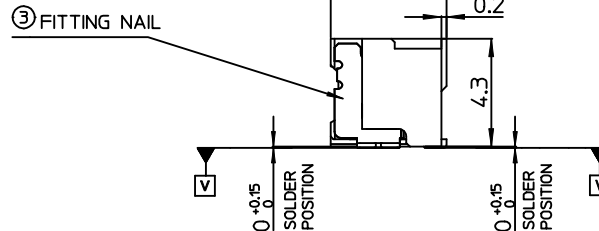

SECTION Y-Y





NOTES.


- MATED WITH : 104092-1000
- MATERIALS
 - ① HEADER : LCP, VECTRA E130i
GLASS FILLED, UL94V-0,
HALOGEN FREE, NATURAL COLOR
 - ② CONTACT TERMINAL : PHOSPHOR BRONZE, 0.2 Thickness
 - ③ FITTING NAIL : PHOSPHOR BRONZE, 0.2 Thickness
- FINISHES
 - ② CONTACT TERMINAL :
PURE -TIN PLATING ON OVERALL.
THICKNESS 3.0 μm~5.0 μm
UNDER PLATING Ni OVERALL
THICKNESS 1.25 μm~3.75 μm
 - ③ FITTING NAIL :
PURE-TIN PLATING ON OVERALL
THICKNESS 3.0 μm~5.0 μm
UNDER PLATING Ni OVERALL
THICKNESS 1.25 μm~3.75 μm
- COPLANALITY OF SOLDER TAILS (PEAK TEMP. : 260°C)
BEFORE & AFTER RELOW : 0.08MAX
- PRODUCT SPECIFICATION : PS-104091-001

ORDER No. 104091-1020



RELEASED EC NO: KOR2012-0022 DRWN: JHPARK01 2010/06/10 CHKD: SH. CHU APPR: YUNSIKKIM 2011/09/30	DESCRIPTION	QUALITY SYMBOLS ▽=0 ⊕=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY JH.PARK	DATE 2010/04/10	TITLE 1.25 W-T-B CONN. HEADER ASS'Y-10P				
			4 PLACES	± ---	± ---	CHECKED BY SH. CHU	DATE 2010/04/10					
			3 PLACES	± ---	± ---	APPROVED BY YUNSIKKIM		DATE 2011/09/30	MOLEX MOLEX INCORPORATED			
			2 PLACES	± 0.15	± ---							
1 PLACE	± 0.20	± ---	ANGULAR ± 1 °		MATERIAL NO. 1040911020	DOCUMENT NO. SD-104091-002	SHEET NO. 1 OF 01					
A	REV		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

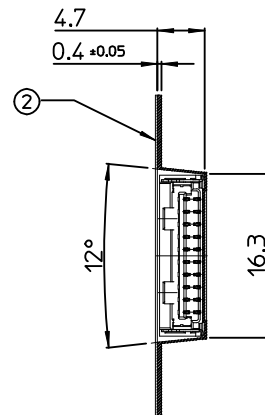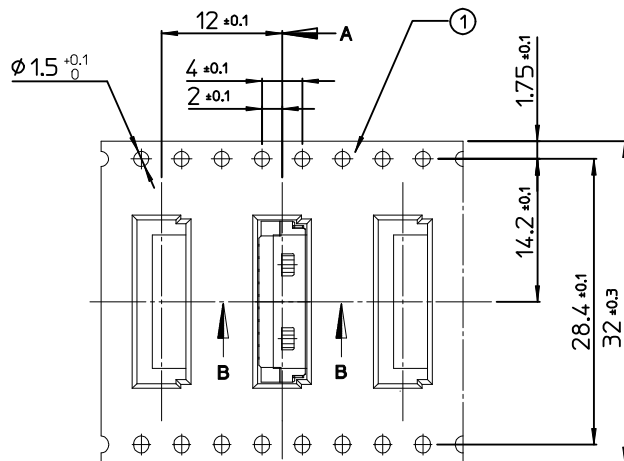

SECTION A-A

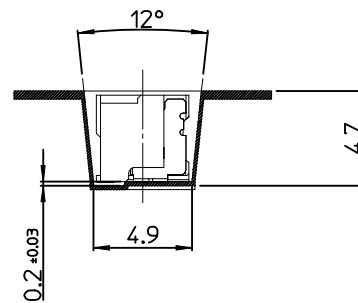


SECTION B-B



PLASTIC BOBBIN

NOTES.

1. QUANTITY OF CONNECTORS : 1500 PCS/REEL
2. LEAD LENGTH

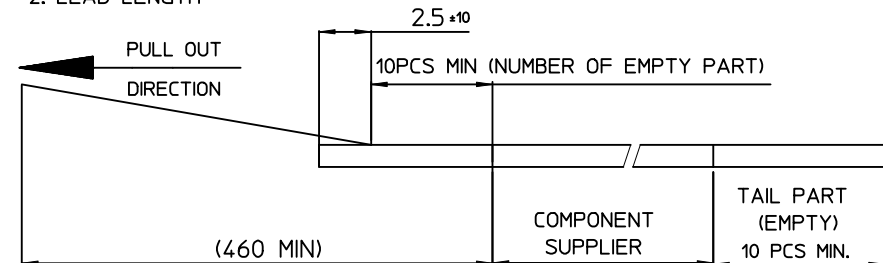

3. PEELING OFF FORCE OF COVER TAPE : 0.1N~0.59N(10.2GF~60GF)
(PEELING DIRECTION AS SHOR IN FOLLOW FIG.)
PEELING OFF SPEED : 300mm/MIN.(Ref.)



4. FLASH IN ANY PORTION SHOULD BE LESS THAN 0.20mm MAX.
5. UNLESS OTHERWISE SPECIFIED INNER R 0.2 MAX
6. DRAFT ANGLE 3° MAX

3	PLASTIC BOBBIN	HI P.S	WHITE
2	COVER TAPE	PET ANTISTATIC	37.5 mm
1	CARRIER (EMBOSSD) TAPE	PET ANTISTATIC	
NO.	DESCRIPTION	MATERIAL	REMARK

ORDER No. 104091-1020

REV	DESCRIPTION	DATE
A	RELEASED	2010/06/11
	EC NO: KOR2012-0022	
	DRWN: JHPARK01	
	CHKD: SH. CHU	
	APPR: YUNSIKKIM	

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ± ---	± ---
3 PLACES ± ---	± ---
2 PLACES ± 0.15	± ---
1 PLACE ± 0.20	± ---
ANGULAR ± 1 °	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM ONLY	
DRAWN BY	DATE
JH. PARK	2010/04/11
CHECKED BY	DATE
SH. CHU	2010/04/11
APPROVED BY	DATE
YUNSIKKIM	2011/09/30
MATERIAL NO.	1040911020

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
2:1	METRIC	
TITLE		
EMBOSSD PACKAGE 1.25 W-T-B CONN HEADER ASS'Y-10P		
MOLEX INCORPORATED		
DOCUMENT NO.	SHEET NO.	1 OF 01
SD-104091-005		