


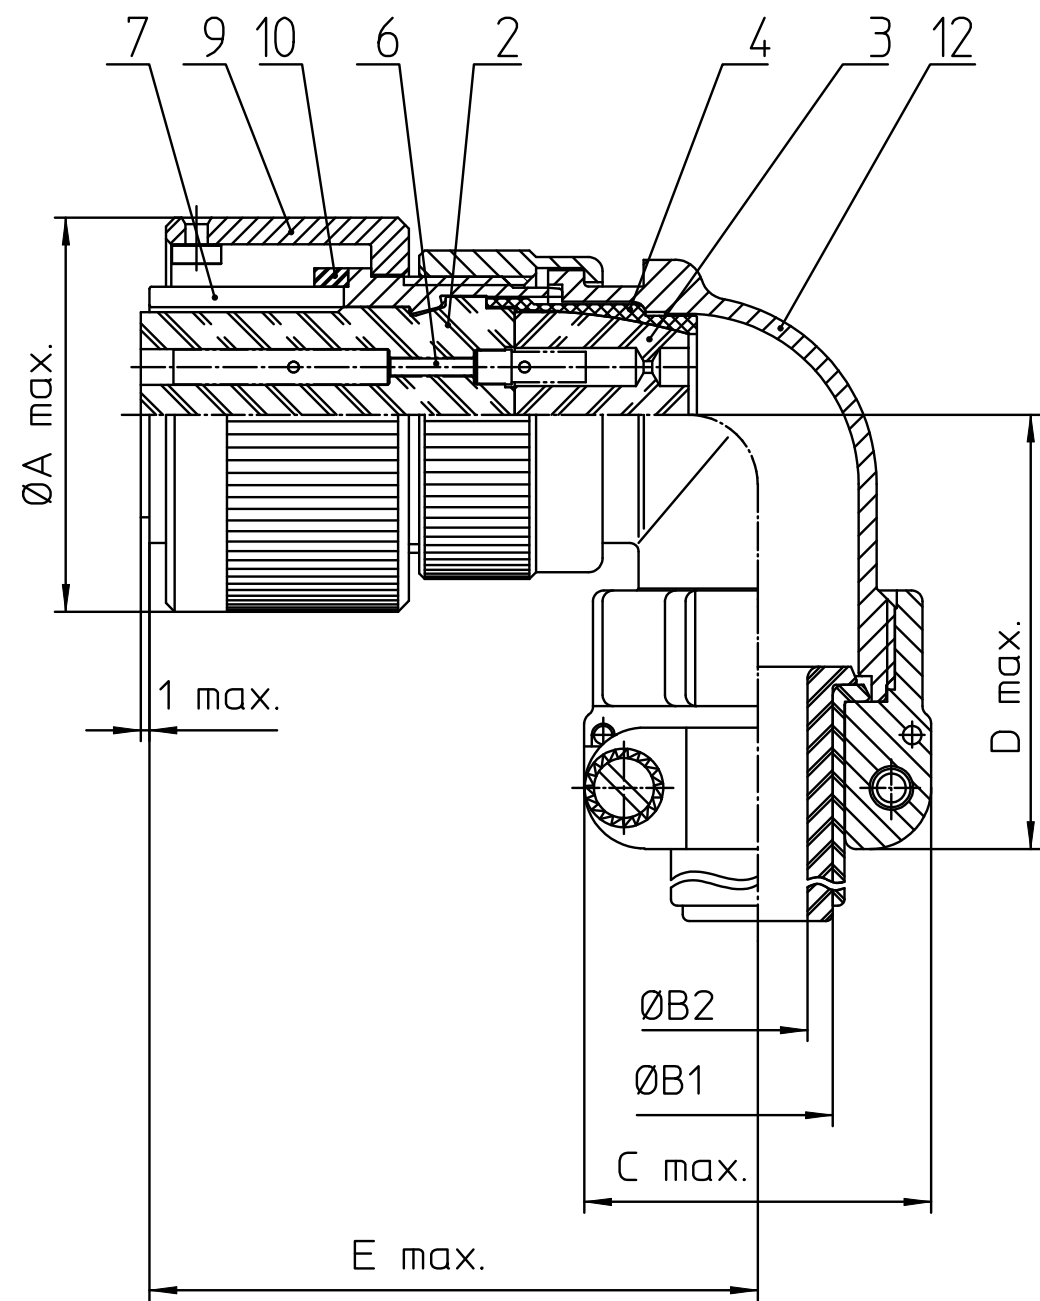

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 29.2              |
| B1  | 9.1               |
| B2  | -                 |
| C   | 27.5              |
| D   | 42                |
| E   | 47                |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3   | DICKTKÖRPER / GROMMET                   |
| 4   | ENDRING / ENDRING                       |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 7   | ZYLINDERGHÄUSE / BARREL                 |
| 9   | ÜBERWURFMUTTER / COUPLING NUT           |
| 10  | DICHTRING FRONT / FRONT SEALING RING    |
| 12  | ENDGEHÄUSE / ENDBELL                    |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.  
Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

|                                                              |
|--------------------------------------------------------------|
| Material Specification:                                      |
| Shell Material: Aluminium alloy                              |
| Shell Plating: Olive drab chromate over cadmium (conductive) |
| Insulator Material: CR-Elastomere                            |
| Contact Material: Copper alloy                               |
| Contact Plating: Gold 0,5 µm                                 |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description CA3108E14S-2S-B-A176  
Plug, 90°  
Endbell with clamp and bushing  
Solder Cup / Socket / Layout: 14S-2

© All rights reserved. Reproduction or issue to third in any form  
whatever is only permitted with written authorization of ITT Cannon



page 1/1  
revision 1862 1. Jul 20