


LOC	DIST	REVISIONS					
AD	39	P	LTR	DESCRIPTION	DATE	DWN	APVD
			0	RELEASED	12-NOV-96	EB	GD

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA,
OVER 0.00127 [0.000050] NICKEL, ENTIRE POST.

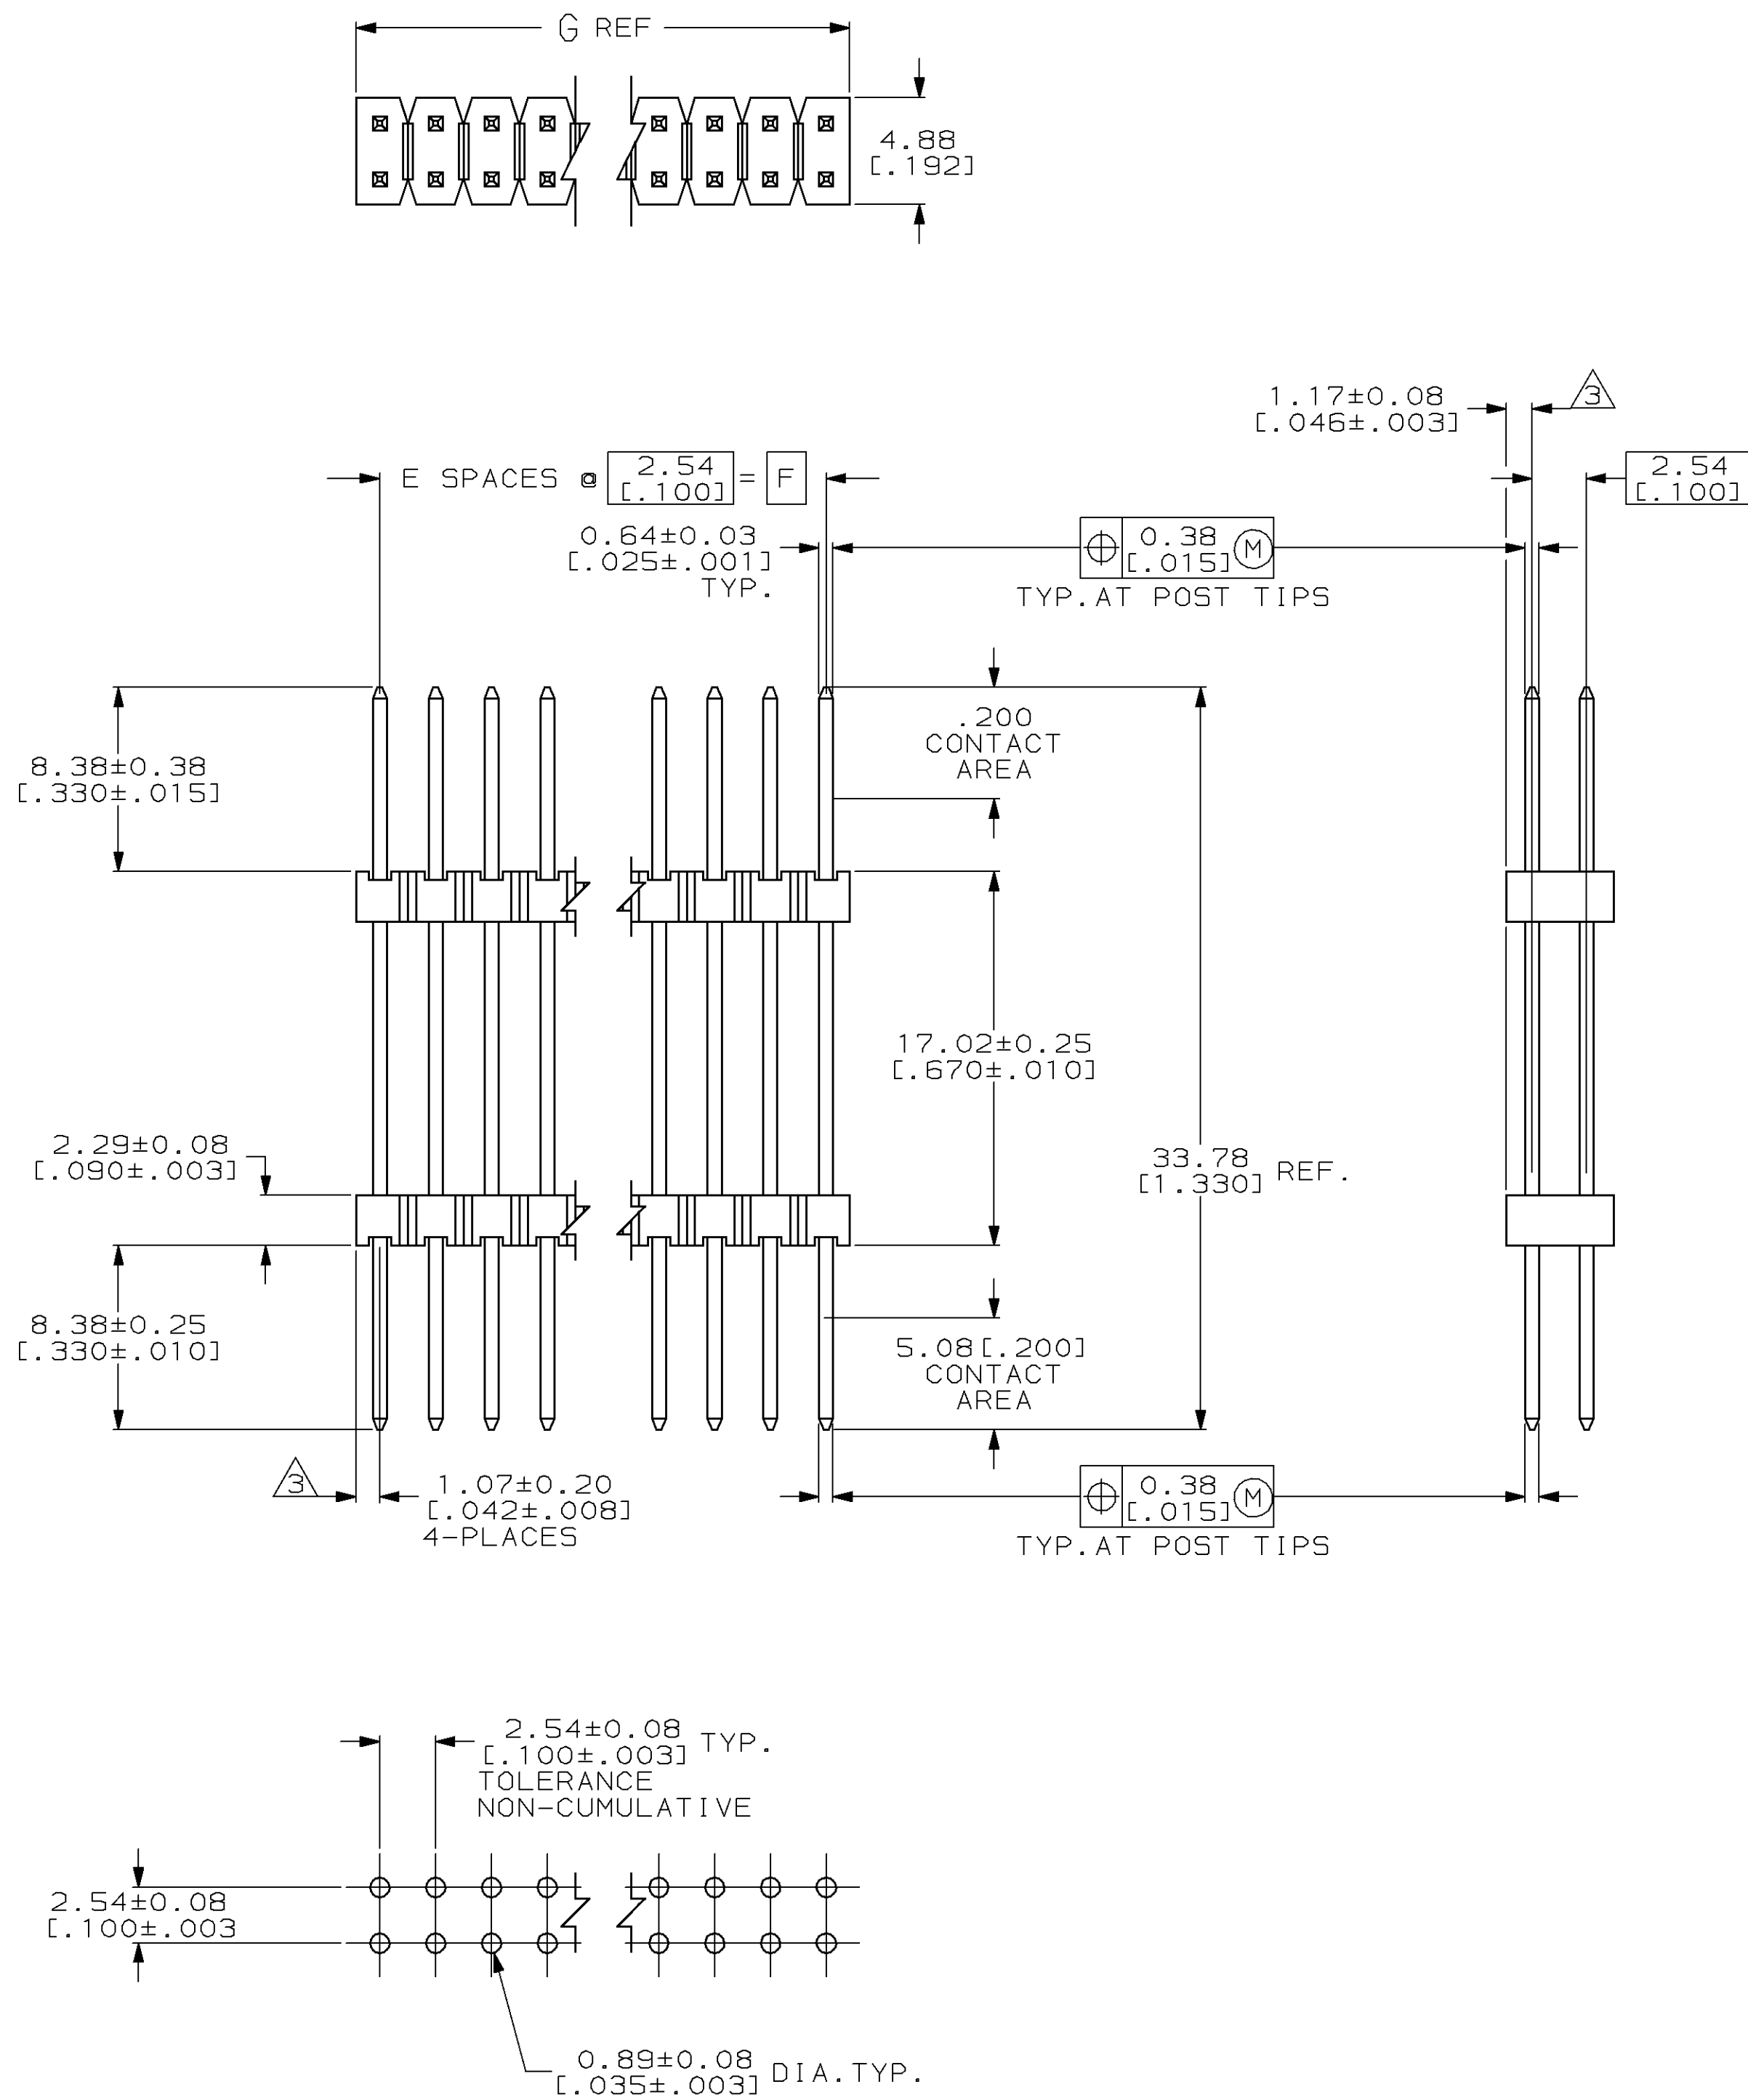

01.19	99.06	39	80	4-146507-0
[3.984]	[3.900]			
98.65	96.52	38	78	3-146507-9
[3.884]	[3.800]			
96.11	93.98	37	76	3-146507-8
[3.784]	[3.700]			
93.57	91.44	36	74	3-146507-7
[3.684]	[3.600]			
91.03	88.90	35	72	3-146507-6
[3.584]	[3.500]			
88.49	86.36	34	70	3-146507-5
[3.484]	[3.400]			
85.95	83.82	33	68	3-146507-4
[3.384]	[3.300]			
83.41	81.28	32	66	3-146507-3
[3.284]	[3.200]			
80.87	78.74	31	64	3-146507-2
[3.184]	[3.100]			
78.33	76.20	30	62	3-146507-1
[3.084]	[3.000]			
75.79	73.66	29	60	3-146507-0
[2.984]	[2.900]			
73.25	71.12	28	58	2-146507-9
[2.884]	[2.800]			
70.71	68.58	27	56	2-146507-8
[2.784]	[2.700]			
68.17	66.04	26	54	2-146507-7
[2.684]	[2.600]			
65.63	63.50	25	52	2-146507-6
[2.584]	[2.500]			
63.09	60.96	24	50	2-146507-5
[2.484]	[2.400]			
60.55	58.42	23	48	2-146507-4
[2.384]	[2.300]			
58.01	55.88	22	46	2-146507-3
[2.284]	[2.200]			
55.47	53.34	21	44	2-146507-2
[2.184]	[2.100]			
52.93	50.80	20	42	2-146507-1
[2.084]	[2.000]			
50.39	48.26	19	40	2-146507-0
[1.984]	[1.900]			
47.85	45.72	18	38	1-146507-9
[1.884]	[1.800]			
45.31	43.18	17	36	1-146507-8
[1.784]	[1.700]			
42.77	40.64	16	34	1-146507-7
[1.684]	[1.600]			
40.23	38.10	15	32	1-146507-6
[1.584]	[1.500]			
37.69	35.56	14	30	1-146507-5
[1.484]	[1.400]			
35.15	33.02	13	28	1-146507-4
[1.384]	[1.300]			
32.61	30.48	12	26	1-146507-3
[1.284]	[1.200]			
30.07	27.94	11	24	1-146507-2
[1.184]	[1.100]			
27.53	25.40	10	22	1-146507-1
[1.084]	[1.000]			
24.99	22.86	9	20	1-146507-0
[.984]	[.900]			
22.45	20.32	8	18	146507-9
[.884]	[.800]			
19.91	17.78	7	16	146507-8
[.784]	[.700]			
17.37	15.24	6	14	146507-7
[.684]	[.600]			
14.83	12.70	5	12	146507-6
[.584]	[.500]			
12.29	10.16	4	10	146507-5
[.484]	[.400]			
9.75	7.62	3	8	146507-4
[.384]	[.300]			
7.21	5.08	2	6	146507-3
[.284]	[.200]			
4.67	2.54	1	4	146507-2
[.184]	[.100]			
2.13	-	-	2	146507-1
[.084]	-			
G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTINUATION OF AMP INCORPORATED'S DRAWING NUMBER 00779 AND THE COMPANY'S DRAWING NUMBER 17105-3608. QUANTITIES SHOWN ARE QUANTITIES FOR THE LATEST REVISION.		DWN 12-NOV-56 E.C. BRANDBERG 12-NOV-56 G. DUBNICKI 12-NOV-56 AMP G. DUBNICKI 12-NOV-56		AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm (INCH)		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLOC ± 2 PLOC ± 0.51 (1.02) 0.127 (0.005) 0.0127 (0.0005) 2-		PRODUCT SPEC — APPLICATION SPEC —	
NATERIAL		FINISH		SIZE	CAGE CODE
				A1	00779
WEIGHT		CUSTOMER DRAWING		DRAWING NO	
—		—		C-146507	
SCALE		1 OF 1		REV 0	
4:1		SHEET			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-146507-5](#)