


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	8 STR/FLEX
Wire Type	Stranded Copper: Class B & C, Compact, Class G, H, I, K, M, Locomotive
Wire Strip Length	1/2 in.
Stud Size	3/8 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	RED
Panduit Die Index No. on Barrel	P21
Alternate Industry Die Index No. () on Barrel	N/A



Technical drawing of a wire probe tip. The drawing shows a rectangular body with a circular feature on the left and a wire inspection window on the right. Dimensions are provided: overall height is $.60 \pm .04$, distance from bottom to center is $.36 \pm .04$, and the circular feature has a diameter of $.41 \pm .02$ DIA. Text on the body includes "PANDUIT" with a trademark symbol, "8 STR/FLEX", and "LCAX8-38F". A leader line points to the "Wire inspection window".

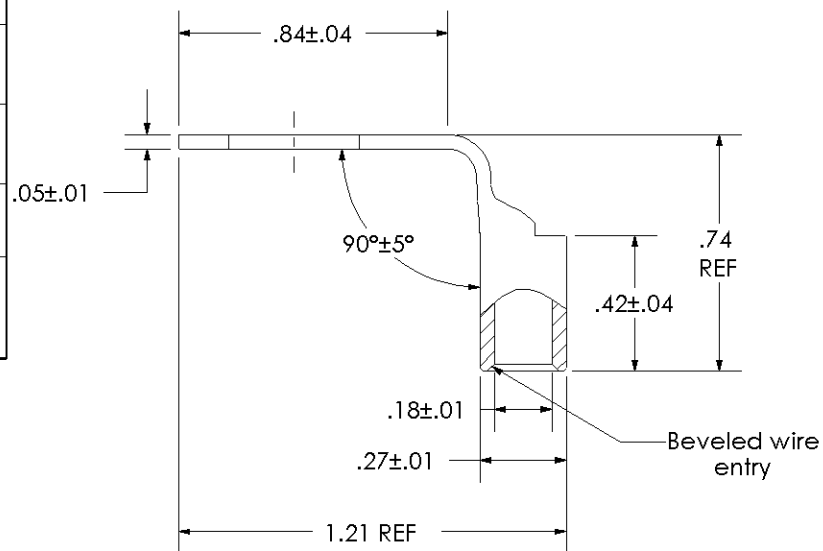

LCAX8-38F-CUST

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

LCAX8-38F-L