
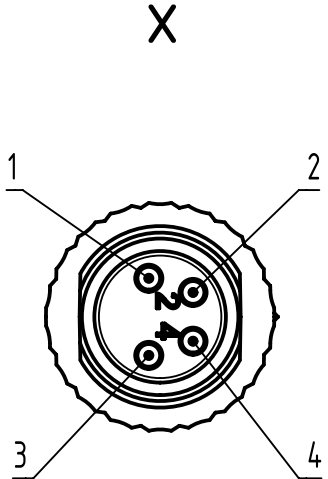


Connector Location A


Connector Location B

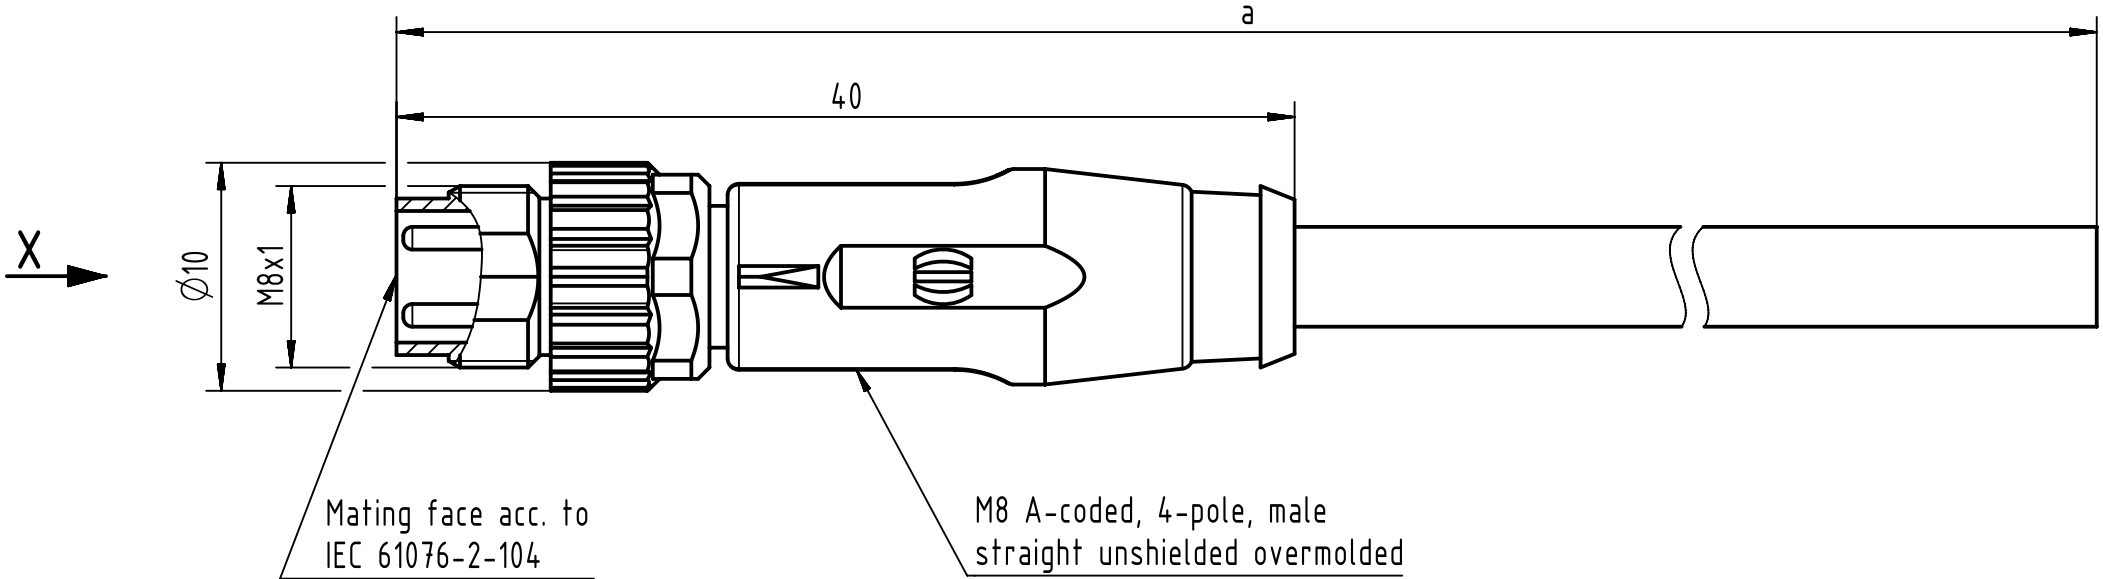

Loading-Plan:

- 1 brown
- 2 white
- 3 blue
- 4 black

- Protection level: IP67  
- Temperature range: -25°C ... +80°C

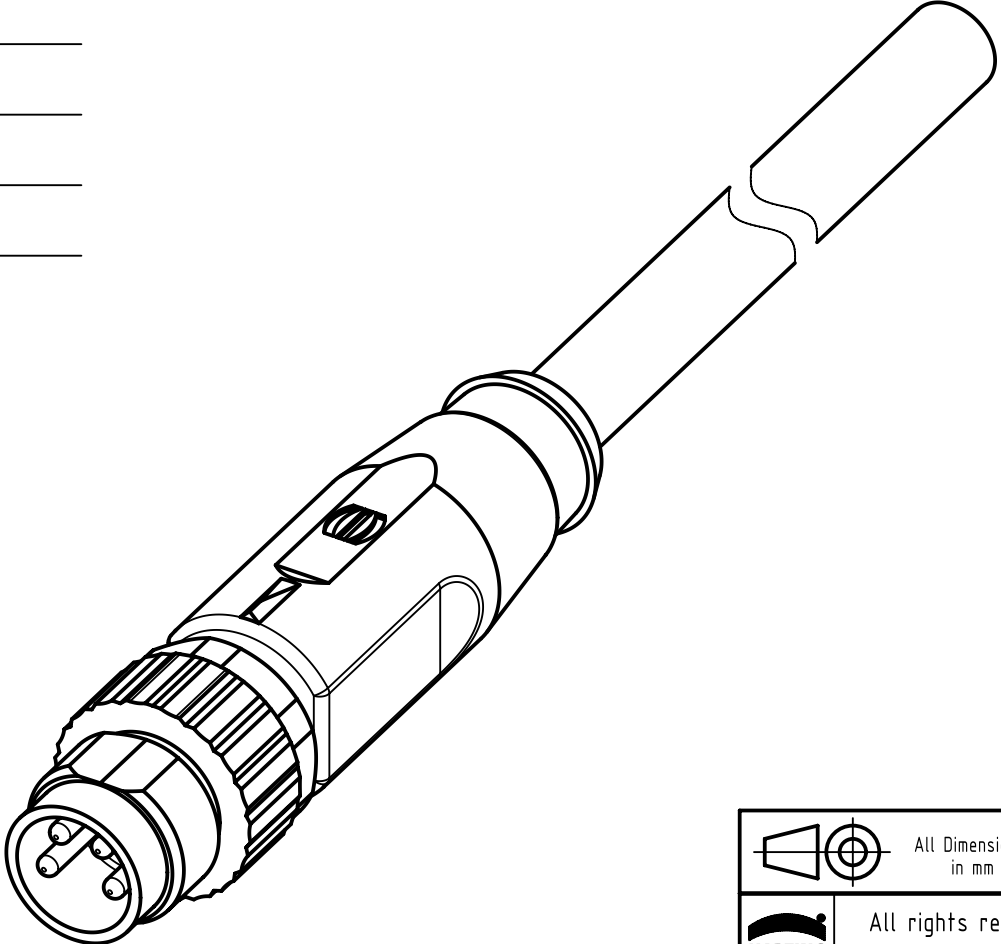

|                       |       |         |
|-----------------------|-------|---------|
| length in "1m" step   | 40    | XXX=400 |
|                       | 39    | XXX=390 |
|                       | .     | .       |
|                       | 12    | XXX=120 |
|                       | 11    | XXX=110 |
| length in "0.1m" step | 10    | XXX=100 |
|                       | 9.9   | XXX=099 |
|                       | 9.8   | XXX=098 |
|                       | .     | .       |
|                       | 0.4   | XXX=004 |
|                       | 0.3   | XXX=003 |
|                       | 0.2   | XXX=002 |
|                       | 0.1   | XXX=001 |
| Step                  | a [m] | XXX     |

|            |           |
|------------|-----------|
| 4.0 to 40  | +1%       |
| 0.1 to 3.9 | +0.04     |
| a [m]      | Tolerance |

|                                  |                |
|----------------------------------|----------------|
| Part no.                         | 213480004XXXXX |
| Type of cable                    | XX             |
| PVC grey, 4x0.25mm <sup>2</sup>  | XX=81          |
| PUR black, 4x0.25mm <sup>2</sup> | XX=89          |

|                              |                     |                         |                       |                 |            |                                 |          |
|------------------------------|---------------------|-------------------------|-----------------------|-----------------|------------|---------------------------------|----------|
| All Dimensions in mm         |                     | Tech. Character.        |                       | Free size tol.  |            | According to production drawing |          |
|                              | All rights reserved | Created by              | Inspected by          | Standardisation | Date       | State                           |          |
|                              | Department HCS - RO | COSTEA                  | MUNTEANV              | AVRAM           | 2017-09-19 | Final Release                   |          |
| HARTING Customised Solutions |                     | Title M8 Cable Assembly |                       |                 |            | Doc-Key / ECM-Nr.               |          |
| D-32427 Minden               |                     | Type TB                 | Number 213480004XXXXX |                 |            | Rev. B                          | Page 1/1 |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[21348000481005](#) [21348000481020](#) [21348000481100](#) [21348000481015](#) [21348000481075](#)