


1 Fig. 1 Ref. No. 5 panel cutout

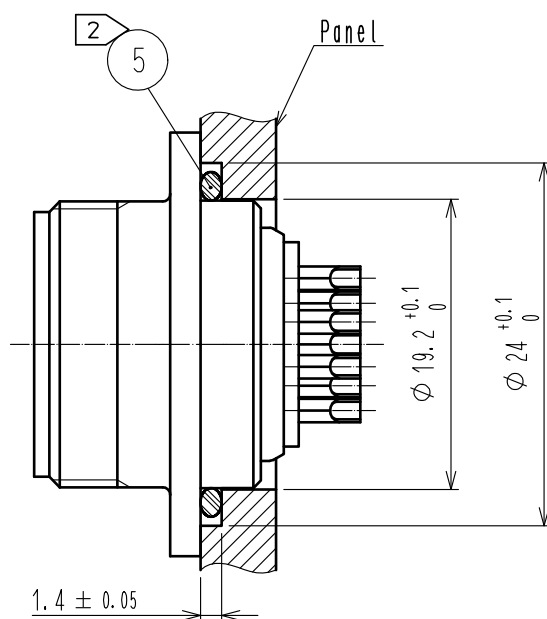

- Notes
- 1 When waterproofing with panel, use Ref. No. 5 (O-ring).
The dimension of attaching Ref. No. 5 to a panel is shown in Fig. 1.
 - 2 When mounted on chassis, be careful that Ref. No. 5 is fitted into the indicated groove without any biting.
 - 3 Surface : Gold 0.2 μ m min.
Under plating : Nickel 3 μ m min.

3	Diallyl phthalate	(Black) UL94V-0			
2	Copper alloy	3	5	Silicone rubber	(Black)
1	Zinic alloy	Chrome plating	4	Diallyl phthalate	(Black) UL94V-0
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
HIROSE ELECTRIC CO., LTD.		APPROVED : YH. YAMADA	16. 04. 05	DRAWING NO.	EDC-111104-72-00
		CHECKED : HY. KOBAYASHI	16. 04. 05	PART NO.	RM15WTRZB-12S(72)
		DESIGNED : HR. SATO	16. 04. 05	CODE NO.	CL109-1682-3-72
		DRAWN : HR. SATO	16. 04. 05		