


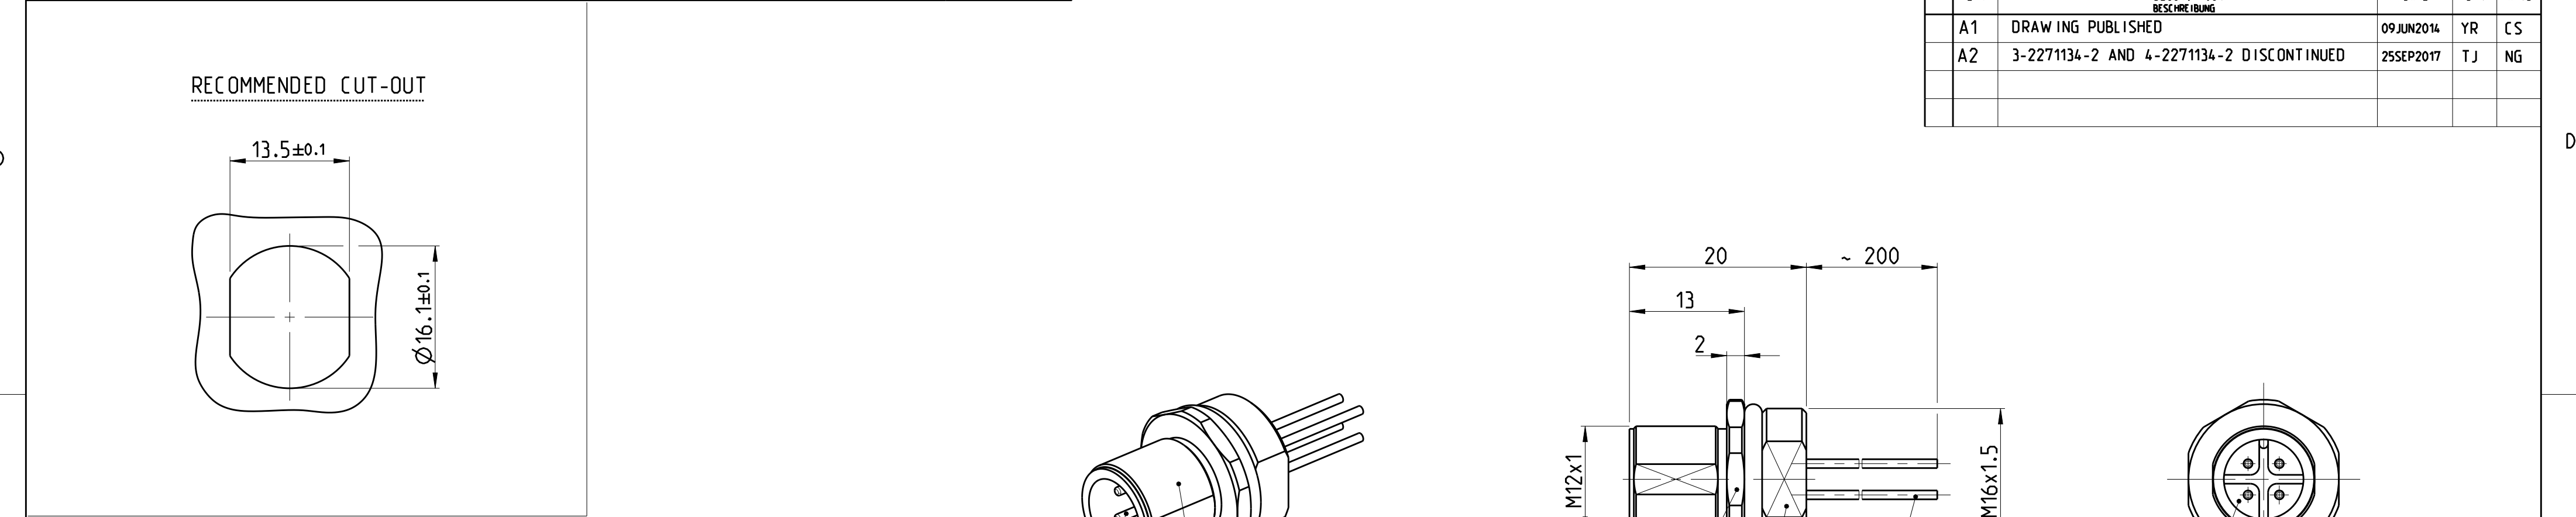

TECHNICAL DATA	3-2271134-2	4-2271134-2	5-2271134-2	6-2271134-2
RATED VOLTAGE	250V	125V	60V	30V
RATED IMPULSE VOLTAGE	2500V	1500V	800V	500V
POLLUTION DEGREE	3	3	3	3
OVERVOLTAGE CATEGORY	II	II	II	II
MATERIAL GROUP	II	II	II	II
RATED CURRENT	4A	4A	2A	2A
VOLUME RESISTIVITY	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ
DEGREE OF PROTECTION	IP68	IP68	IP68	IP68
UPPER TEMPERATURE	+85 °C	+85 °C	+85 °C	+85 °C
LOWER TEMPERATURE	-40 °C	-40 °C	-40 °C	-40 °C

⚠ MATERIAL: ITEM NO. 1: HOUSING - ZINC DIE-CAST
FINISH: NICKEL-PLATED
ITEM NO. 2: CONTACT BODY - PA
ITEM NO. 3: CONTACT - CuZn
FINISH: Au

- 2 ALL DIMENSIONS ARE FOR NOMINAL REFERENCE ONLY UNLESS OTHERWISE STATED
- 3 MEASUREMENT REFERENCE ONLY
- 4 PACKAGING: 1 PIECE IN A BAG
- 5 PANEL MOUNT NUT PN 2823066-1 TO BE ORDERED SEPARATELY

3--2 AS SHOWN
WIE GEZEICHNET

PIN ARRANGEMENT A-CODING			
3-2271134-2	4-2271134-2	5-2271134-2	6-2271134-2

SIZE ISO 14405 ⓔ

DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT. BEMASSUNGEN UND TOLERANZEN GEMAESS GPS (ISO STANDARDS).			
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).			
DIMENSIONS: MASSEINHEITEN: [mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN	
0 PLC ±		1 PLC ±	
2 PLC ±		3 PLC ±	
4 PLC ±		ANGLES/WINKEL ±	
FINISH/OBERFLÄCHE/FARBE		WEIGHT GEWICHT	
-		-	
-		-	
Customer Drawing		Customer Drawing	
DWN YASHKUMAR 09JUN2014 CHK M.STRELOW 09JUN2014 APVD C.SCHREITLINGER 09JUN2014		NAME	
PRODUCT SPEC		APPLICATION SPEC	
VERARBEITUNGSSPEZ.		WEIGHT	
-		-	
SIZE		CAGE CODE	
A2		00779	
DRAWING NO. ZEICHNUNGS-NR.		RESTRICTED TO NUR FÜR	
C-2271134		-	
SCALE MASSSTAB		SHEET BLATT	
2:1		1 OF 1	
REV		A2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4-2271134-2](#)