

Series 152FB **Fusion-Bonded Cable Jumpers**

FEATURES

- Flexible Fusion-bonded Jumpers Plug Directly into PC Boards or Sockets
- Stranded Wire Conductors Fusion-bonded with an Overcoat of Sn for Easy Soldering or Socketing
- Jumpers Shipped with Protective Tabs on Ends to Maintaining Proper Conductor Spacing




GENERAL SPECIFICATIONS

- INSULATION: UL VW-1, Style 2651 Polyvinyl Chloride (PVC) with optional Polarization Stripe on one side
- NOMINAL INSULATION THICKNESS: 0.009 [0.23]
- CONDUCTORS: 26-gauge, 7-strand Cu with Sn fusion-bonded overcoat
- OPERATING TEMPERATURE: -4°F to 221°F [-20°C to 105°C]
- VOLTAGE RATING: 300Vrms
- DIELECTRIC WITHSTANDING VOLTAGE: 1500Vrms
- INSULATION RESISTANCE: 10,000 M Ω per 10 feet [3.05 meters]
- **RESISTANCE**: 40.3Ω per 1000 feet [304.8 meters]
- PROPAGATION DELAY: 1.3ns/ft.


MOUNTING CONSIDERATIONS

• SUGGESTED PCB HOLE SIZE: $0.033 \pm 0.002 [0.84 \pm 0.05]$ dia.

ORDERING INFORMATION



* Aries reserves the right to ship with or without unless specified by customer.

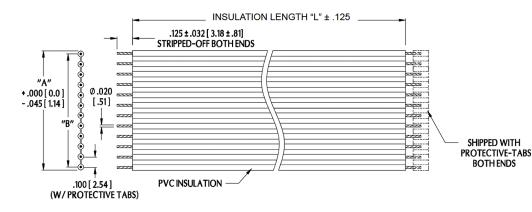

# Conductors	Min. Insulation Length
4 thru 8	1.000 [25.40]
9 and 10	1.250 [31.75]
11 thru 22	1.500 [38.10]

"A" (NO. OF CONDUCTORS) x 0.100 [2.54] "B" (NO. OF CONDUCTORS -1) x 0.100 [2.54]

ALL DIMENSIONS: INCHES [MILLIMETERS]

ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED

ALL CABLES SHIP WITH Pb-FREE MATERIAL UNLESS CUSTOMER SPECIFIED WHEN ORDERING

CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

CUSTOMIZATION: ARIES SPECIALIZES IN CUSTOM DESIGN AND PRODUCTION. SPECIAL MATERIALS, PLATINGS, SIZES, AND CONFIGURATIONS CAN BE FURNISHED, DEPENDING ON QUANTITY.

SHIPPED WITH

BOTH ENDS

ARIES RESERVES THE RIGHT TO CHANGE PRODUCT GENERAL SPECIFICATIONS WITHOUT NOTICE

PRINTOUTS OF THIS DOCUMENT MAY BE OUT-OF-DATE AND SHOULD BE CONSIDERED UNCONTROLLED





Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Aries Electronics: