



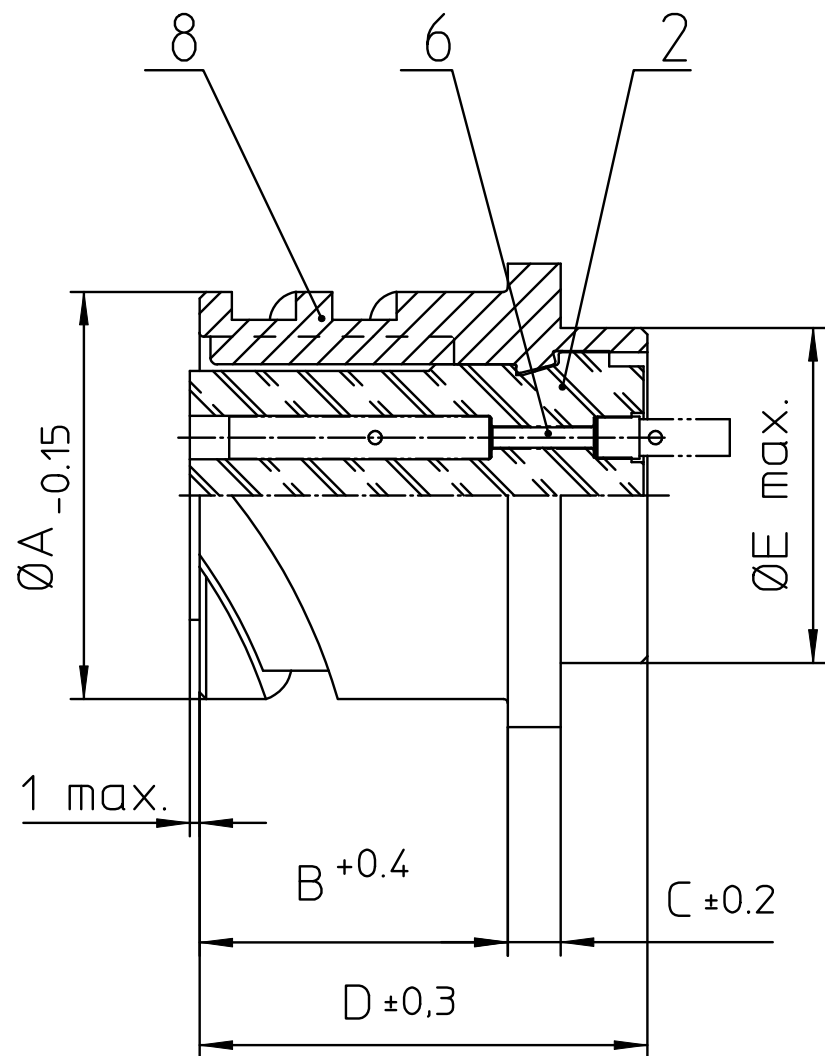

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 8   | DOSENGEHÄUSE / SHELL                    |

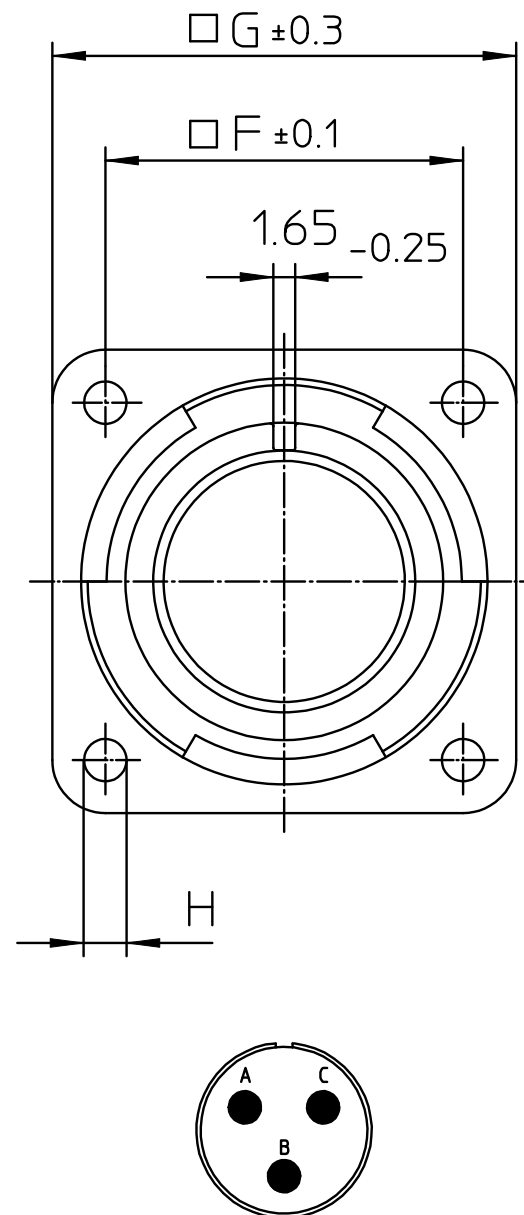

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 18.2              |
| B   | 14.2              |
| C   | 2.8               |
| D   | 24.7              |
| E   | 16.2              |
| F   | 18.2              |
| G   | 25.4              |
| H   | 3.2               |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

|                         |                                               |
|-------------------------|-----------------------------------------------|
| Material Specification: |                                               |
| Shell Material:         | Aluminium alloy                               |
| Shell Plating:          | Olive drab chromate over cadmium (conductive) |
| Insulator Material:     | CR-Elastomere                                 |
| Contact Material:       | Copper alloy                                  |
| Contact Plating:        | Hard silver                                   |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



Engineered for life  
ITT CANNON GmbH  
D - 71384 Weinstadt/Germany

description CA3102E10SL-3S-B-F80-F0  
Box mounting receptacle

AWG Crimp / Socket / Layout: 10SL-3

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon



page  
1/1

revision  
1906 17. Sep 20