

3mm


Prism® CBI® Circuit Board Indicator

Surface Mount LED, Round Lens

Dialight

591-2001-0xx
591-2301-0xx
591-2401-0xx

1

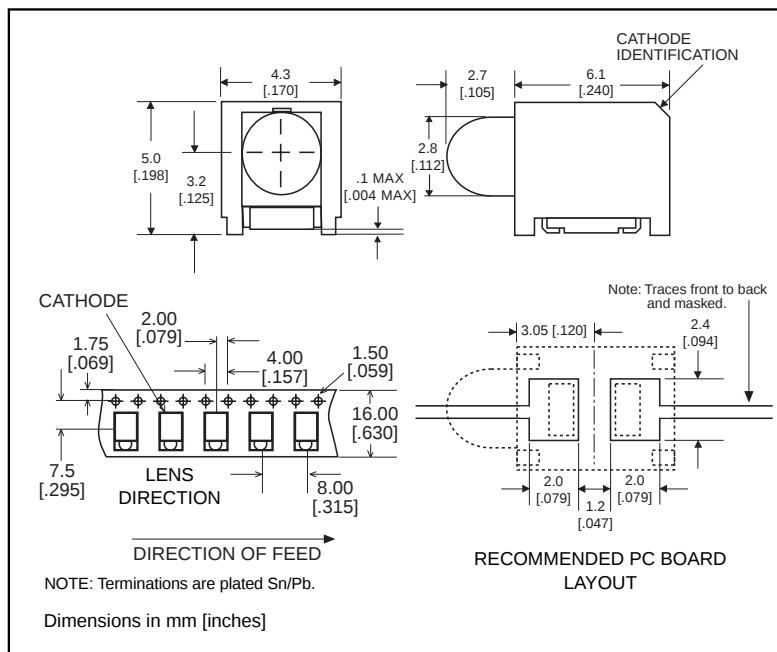

U.S. Patent RE 34,254; foreign patents pending.

Part Number*

Type

591-2001-0xx	High Efficiency Red
591-2301-0xx	High Performance Green
591-2401-0xx	High Performance Yellow

Features

- Helps to eliminate mixed technology PC board processing.
- Unique patented low part count design.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase solder processes.
- Packaged on 16mm tape, 7" or 13" reels per EIA-481-2.
- Black housing enhances contrast ratio.
- Housing material meets UL94V-0 flammability rating.
- Lens material meets UL94-HB flammability rating.
- Uses LEDs designed specifically for surface mounting.

*ORDERING INFORMATION

591-2x01-0xx

packaging option

02	20 pieces on tape
07	7" reel, 400 pcs/reel
13	13" reel, 1600 pcs/reel

NEW

591-2001-0xx
591-2301-0xx
591-2401-0xx

Absolute Maximum Ratings, $T_A=25^{\circ}\text{C}$

Parameter	-2001	-2301	-2401
Color*	20	21	24
Power Dissipation (derate linearly from 25°C mW/ $^{\circ}\text{C}$)	100mW .4	100mW .4	60mW .25
Forward DC Current	30mA	30mA	20mA
Peak Forward Current (10 μ sec)	120mA	120mA	80mA
Operating Temperature	-55°C to $+100^{\circ}\text{C}$		
Storage Temperature	-55°C to $+100^{\circ}\text{C}$		
Soldering Temperatures Convection IR Vapor Phase	235 $^{\circ}$ Peak, above 185 $^{\circ}$ for 90 sec., 215 $^{\circ}\text{C}$ for 3 Min.		

Solder Adherence per MIL-STD-202E, Method 208C

*LED colors: 20) High Efficiency Red 21) High Efficiency Green,

24) High Performance Yellow

U.S. Patent RE 34,254; foreign patents pending.

Operating Characteristics ($T_A = 25^{\circ}\text{C}$)

Parameter	Part No.	Color*	Min	Typ	Max	Units	Test Cond.
Forward Voltage V_F	-2001	20		2	2.6	V	$I_F = 10\text{mA}$
	-2301	21		2	2.6		
	-2401	24		2	2.6		
Reverse Voltage V_R	-2001	20	5			V	$I_R = 10\mu\text{A}$
	-2301	21	5				
	-2401	24	5				
Dominant Wavelength λ_{Dom}	-2001	20		628		nm	
	-2301	21		570			
	-2401	24		590			
Luminous Intensity I_V	-2001	20		5		mcd	$I_F = 10\text{mA}$
	-2301	21		4			
	-2401	24		5			
Viewing Angle ($2\Theta_{1/2}$)	-2001	20		40		deg.	
	-2301	21		40			
	-2401	24		40			

$\Theta_{1/2}$ is the off axis angle at which the luminous intensity is half the axial luminous intensity

*LED colors: 20) High Efficiency Red 21) High Efficiency Green,

24) High Performance Yellow

Dialight

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

[591-2001-013](#) [591-2401-013](#) [591-2601-007](#) [591-2301-013](#)