


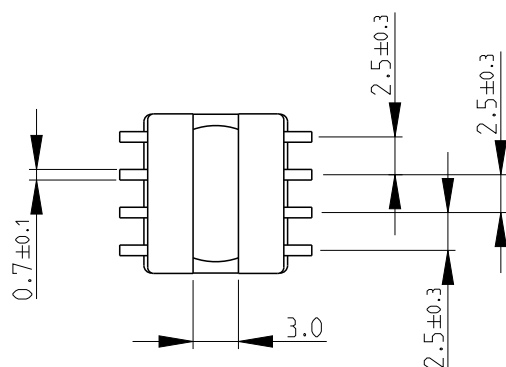


LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
			BA2	ECR-13-015529	04OCT2013	KR	TN

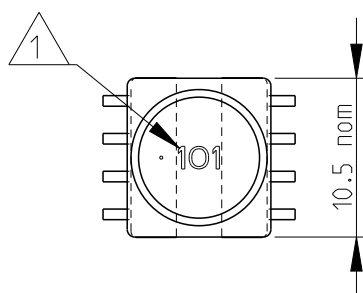


RECOMMENDED LAND PATTERN FOR
INDUCTANCE VALUES 100 μ H OR HIGHER

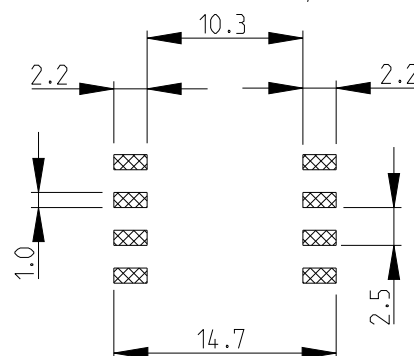

RoHS Compliant

RECOMMENDED LAND PATTERN FOR
INDUCTANCE VALUES 1.5 μ H - 82 μ H

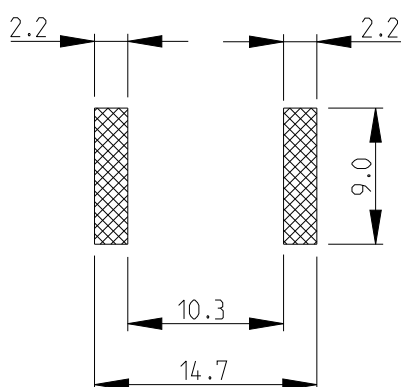


INDUCTANCE CODE


2

FOR FURTHER INFORMATION SEE DATA SHEET FOR
3632 SERIES-SHIELDED SMD POWER INDUCTORS


101Y ~ 153Y



1R5M ~ 820M



SCHEMATIC DIAGRAM




2008

RELEASED FOR PUBLICATION

THIS DRAWING IS UNPUBLISHED.

ALL RIGHTS RESERVED.

BY -
COPYRIGHT 2008

DIMENSIONS:		DWN	03-Sep-08	MATERIAL	-	FINISH	-
mm		SUBHASH.M					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	03-Sep-08	 TE Connectivity			
		PRAKASH.S					
		APVD	03-Sep-08				
		STEPHEN.P					
0 PLC ±0.2		PRODUCT SPEC		NAME			
1 PLC ±0.1		-					
2 PLC ±-		APPLICATION SPEC		SHIELDED SMD POWER INDUCTOR SERIES 3632B			
3 PLC ±-		-					
4 PLC ±-		WEIGHT	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
ANGLES ±5°				A 4	00779	©- 1625813	-
		Customer Drawing			SCALE	2:1	SHEET 1 OF 1
					REV BA2		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3632B682LL](#)