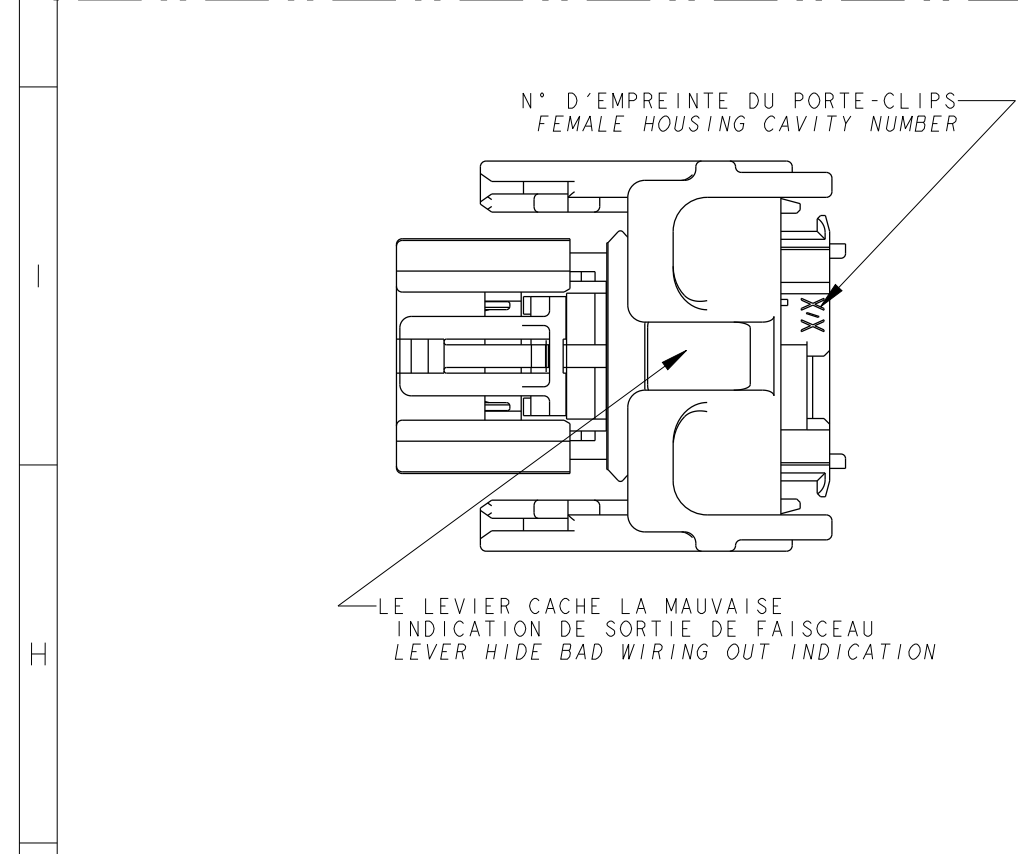


[illegible]



DETAIL ALVEOLES 0.635
DETAIL CAVITIES 0.635

40 x 0.80 ± 0.05
0.20 (M) A B C

40 x 0.90 ± 0.05
0.20 (M) A B C

E F G

ECHELLE 5:1 / SCALE 5:1

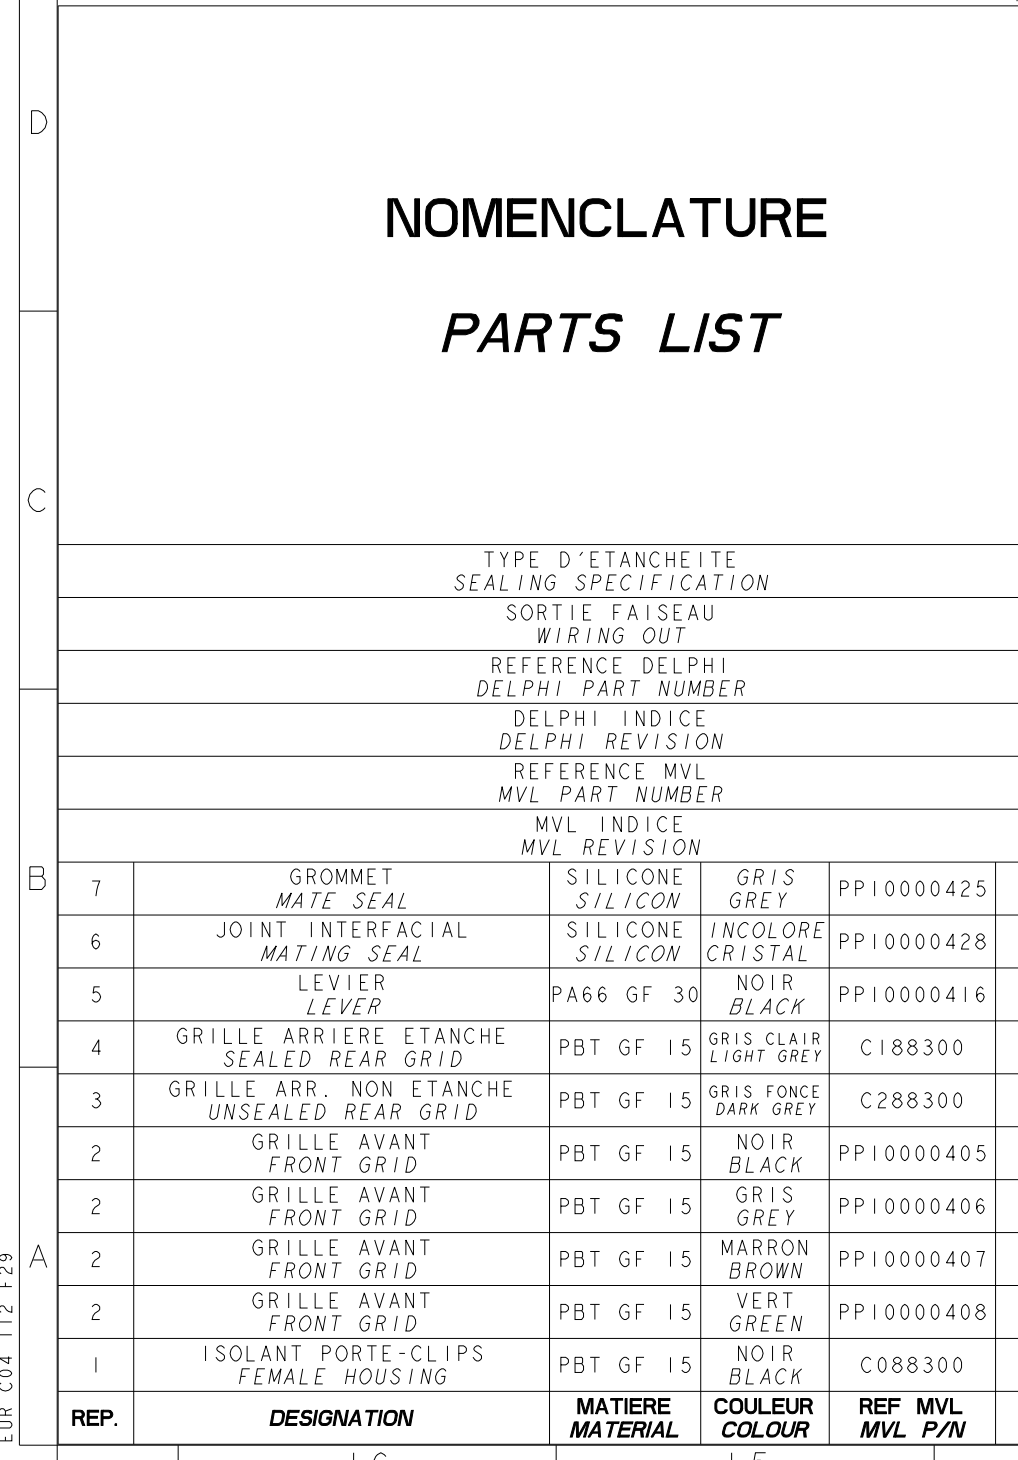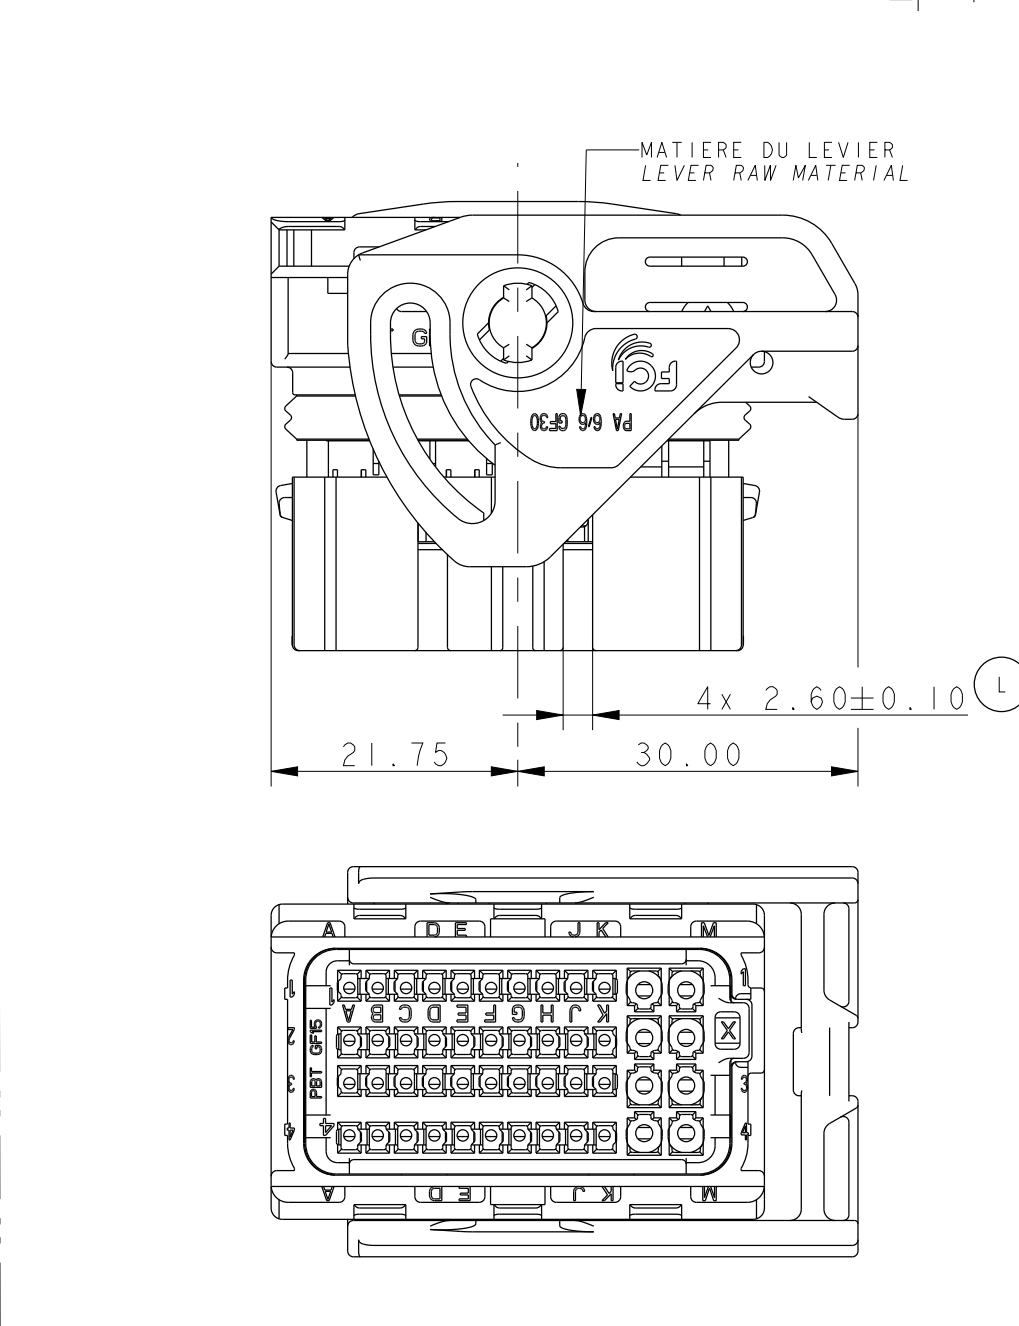[illegible]

INDICE DU PORTE-CLIPS ASSEMBLE
REVISION LEVEL OF FEMALE CONNECTOR

ZONE DE MARQUAGE
MARKING AREA

**MARQUAGES EN DESSOUS DU LEVIER
(LEVIER ENLEVE POUR CETTE VUE)
(MARKING UNDER LEVER COMPONENT
(LEVER REMOVED FOR THIS VIEW))**


LOGO DELPHI
DELPHI'S LOGO

INDICATION SORTIE FAISCEAU (DROIT)
WIRING OUT INDICATION (RIGHT)

38.20 ± 0.25
GRILLE PRE-VERROUILLEE
(POSITION DE LIVRAISON)
GRID PRE-LOCKED (DELIVERY POSITION)

34.40 ± 0.30
0.20 C


A

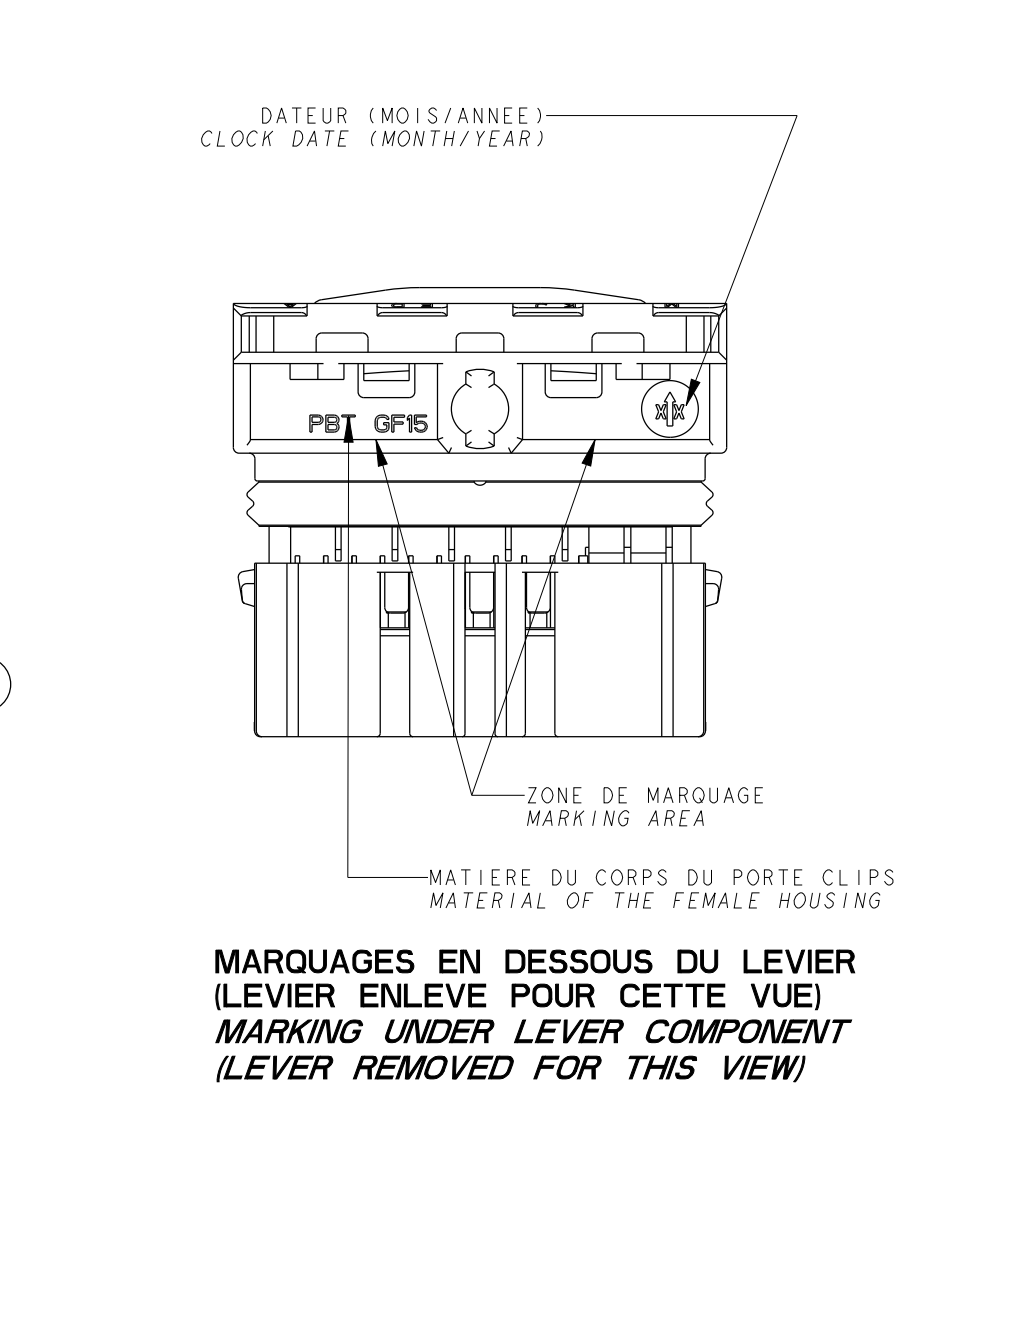

CODAGE : EN ACCORD AVEC LA SPECIFICATION NF R 13
 CODING : IN ACCORDANCE WITH NF R 13-462 SPECIFICATION
 CODAGE GRIS
 GREY CODING

INDICATION SORTIE FAISCEAU (GAUCHE)
 WIRING OUT INDICATION (LEFT)

Technical drawing showing the wiring harness and fuse block assembly. The drawing includes a side view of the fuse block with a label 'K&B 100 A' and a top view of the wiring harness with a label 'K&B 100 A'. The drawing is oriented horizontally on the page.

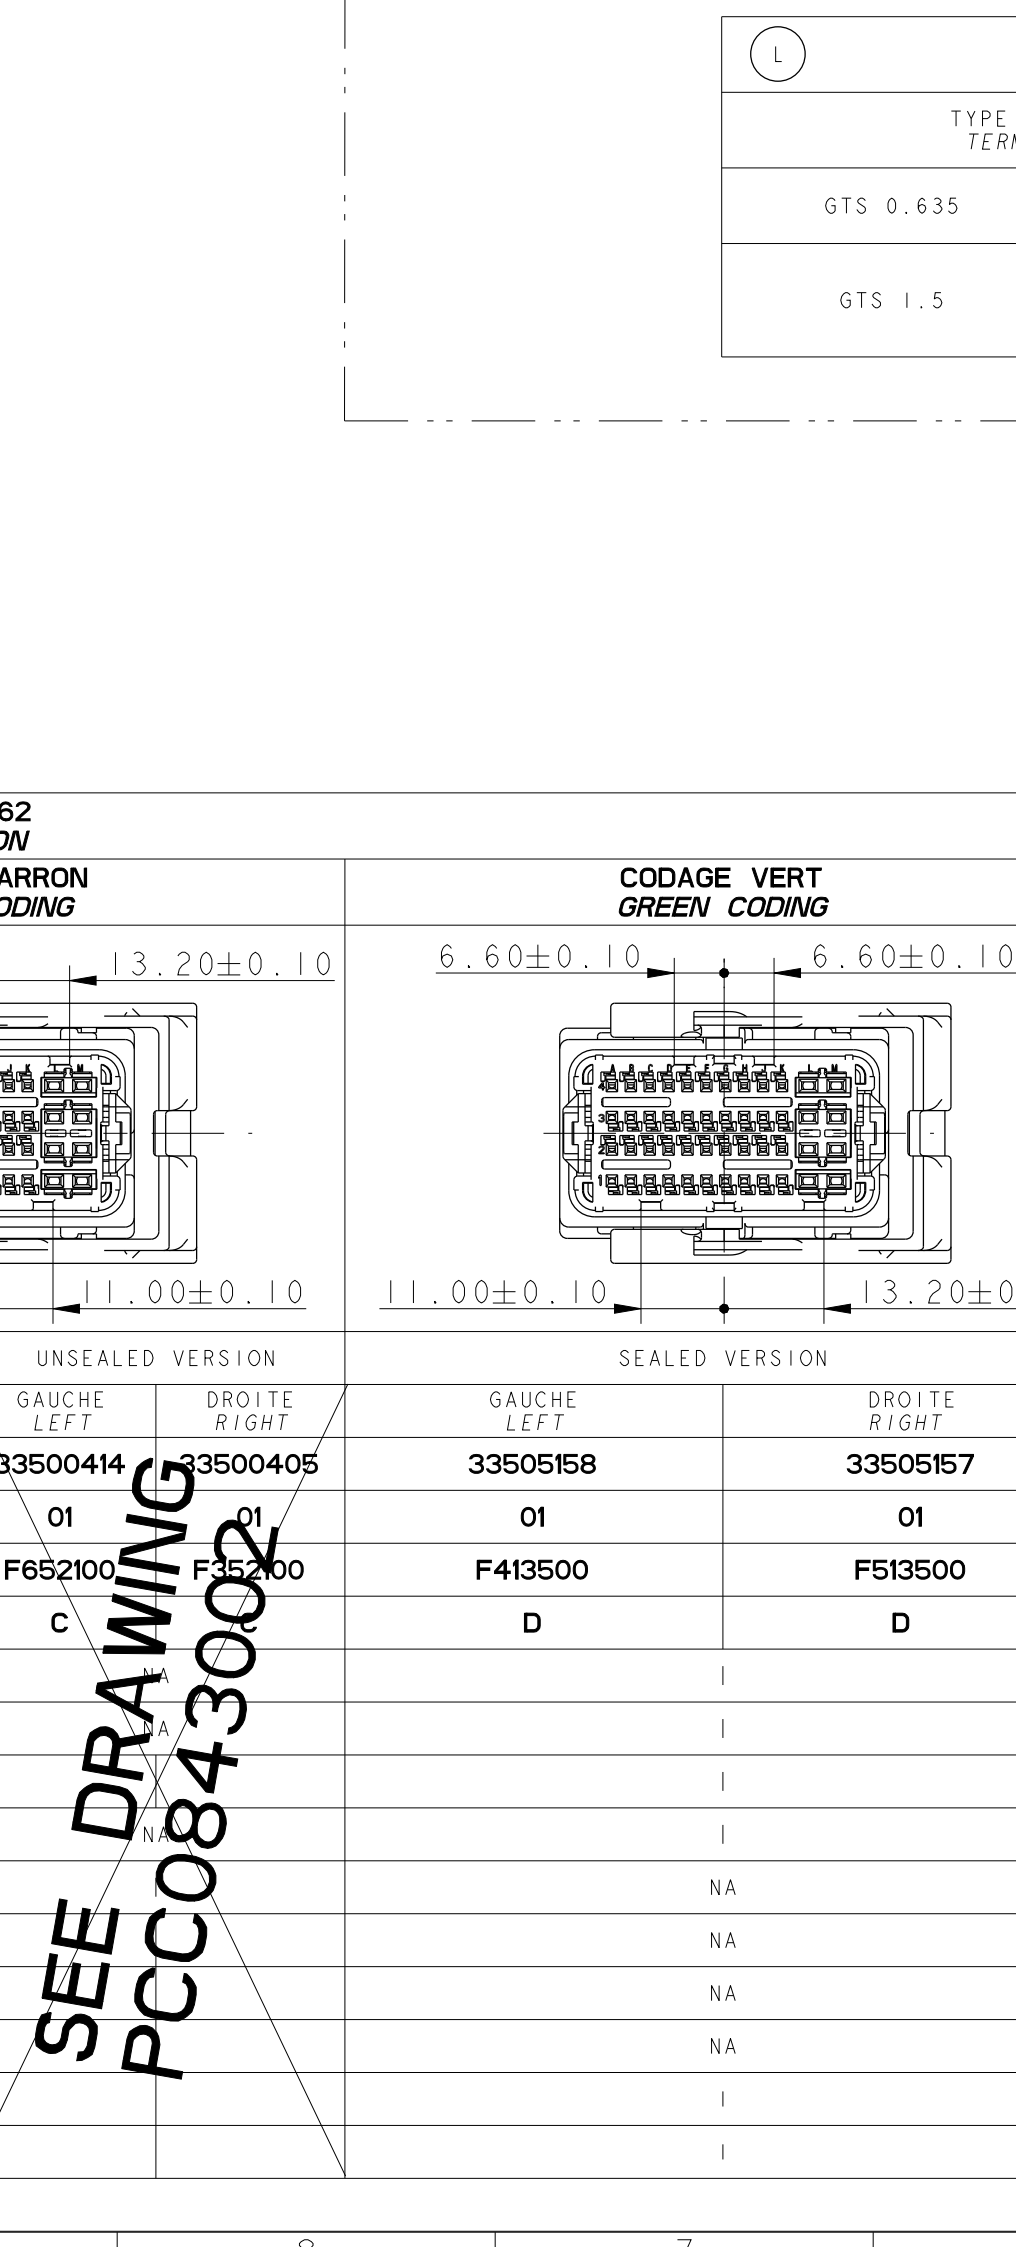

SORTIE FAISCEAU A GAUCHE
LEFT WIRING OUT

L		PRODUITS ASSOCIES ASSOCIATED PARTS			
CAPOT COVER		BOUCHON D'AL CAVITY PL			
SORTIE DES FILS WIRES OUTPUT	MVL P/N	DELPHI P/N	MVL P/N	DELPHI P/N	MVL P/N
	0°	F965000	13956254	PP10001045	13768626
	45°	PP10001538	33517228		

[illegible]

LE LEVIER CACHE LA MAUVAISE
INDICATION DE SORTIE DE FAISCEAU
LEVER HIDE BAD WIRING OUT INDICATION

DESIGN OF THE PRODUCT					
SURFACE	Ø MINIMUM	Ø MAXIMUM			
	1.30	1.50			
	1.40	1.70			
0	2.00	2.20			
0	2.10	2.40			
	2.30	2.80			
Mechanical Properties			CT 0635	CT 15	
A 90° ET 180° ND 180°			10N MAXI	12N MAXI	
			24 MINI	30 MINI	
			80N MINI	100N MINI	
PC/PL			65N MAXI		
PC/PL			65N MAXI		
			200N MINI		
			-40°C / +125°C		
			15 g		
			±0.5 Bar IPX9K		
			(L)		
Added in Table A (B Was A)					
Cabled Version Connector and Housing (D Was C)					
Versions, which are only produced in a version to be accordance with other customer drawings closing for automatic control.					
Change Description Modification					
Copyright: Delphi Corporation and/or its affiliates. All rights reserved. Revised drawing is the property of Delphi Corporation and contains Delphi information. The reproduction, distribution and utilization of this document or its contents without prior authorization from Delphi is prohibited. Toute réimpression ou utilisation non autorisée sans la permission écrite de la société Delphi Corporation est formellement interdite. Toute réimpression ou utilisation non autorisée sans la permission écrite de la société Delphi Corporation est formellement interdite.					
Drawing Number PCC0420007			Revision L		
Project Name SERIAL RELEASED			Scale See Table		

NOMENCLATURE						
PARTS LIST						
TYPE D'ETANCHEITE						
SEALING SPECIFICATION						
SORTIE FAISAU						
WIRING OUT						
REFERENCE DELPHI						
DELPHI PART NUMBER						
DELPHI INDICE						
DELPHI REVISION						
REFERENCE MVL						
MVL PART NUMBER						
MVL INDICE						
MVL REVISION						
7	GROMMET MATE SEAL	SILICONE SILICON	GRIS GREY	PP10000425		C
6	JOINT INTERFACIAL MATING SEAL	SILICONE SILICON	INCOLORE CRISTAL	PP10000428		A
5	LEVIER	P466 GF 30	NOIR BLACK	PP10000416		A
4	GRILLE ARRIERE ETANCHE SEALED REAR GRID	PBT GF 15	GRIS CLAIR LIGHT GREY	C188300		C
3	GRILLE ARR. NON ETANCHE UNSEALED REAR GRID	PBT GF 15	GRIS FONCE DARK GREY	C288300		C
2	GRILLE AVANT FRONT GRID	PBT GF 15	NOIR BLACK	PP10000405		B (L)
2	GRILLE AVANT FRONT GRID	PBT GF 15	GRIS GREY	PP10000406		B (L)
2	GRILLE AVANT FRONT GRID	PBT GF 15	MARRON BROWN	PP10000407		B (L)
2	GRILLE AVANT FRONT GRID	PBT GF 15	VERT GREEN	PP10000408		B (L)
1	ISOLANT PORTE-CLIPS FEMALE HOUSING	PBT GF 15	NOIR BLACK	C088300		D (L)
REP.	DESIGNATION	MATIERE MATERIAL	COULEUR COLOUR	REF. MVL	MVL P/N	INDICE REVISION

CODAGE NOIR BLACK CODING				CODAGE GRIS GREY CODING				CODAGE MARRON BROWN CODING				CODAGE VERT GREEN CODING			
SEALED VERSION		UNSEALED VERSION		SEALED VERSION		UNSEALED VERSION		SEALED VERSION		UNSEALED VERSION		SEALED VERSION			
GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT		
13956021	13956255	33500411	35004000	33500499	33500500	33500417	35004008	33500419	33500420	33500414	35004005	33505158	33505157		
O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1		
PPI0001494	PPI0001495	F552100	F552100	PPI0001496	PPI0001497	F752100	F452100	F765000	F865000	F652100	F352100	F413500	F513500		
D	D	C		D	D	C		D	D	C		D	D		
I				I				I				I			
I				I				I				I			
I				I				I				I			
NA				NA				NA				NA			
I				NA				NA				NA			
NA				I				NA				NA			
NA				NA				I				NA			
NA				NA				NA				I			
I								I				I			
SEE DRAWING PCC0843002															
SEE DRAWING PCC0843002															
SEE DRAWING PCC0843002															
QTE QTY															

SEALED VERSION

UNSEALED VERSION

**SEE DRAWING
PCC0843002**

PRINCIPALES PROPRIETES MECANQUES MAIN MECHANICAL PROPERTIES				CT 0635		CT 15	
FORCE D'INSERTION D'UN CONTACT TERMINAL INSERTION FORCE				10N MAXI		12N MAXI	
EFFORT DE POLARISATION D'UN CONTACT A 90° ET 180° TERMINAL POLARISATION FORCE AT 90° AND 180°				24 MINI		30 MINI	
EFFORT DE RETENTION AVEC DV RETENTION FORCE WITH SECONDARY LOCK				80N MINI		100N MINI	
EFFORT SUR LE LEVIER D'ACCOUPLEMENT PC/PL MATING FORCE ON THE SLIDER DEVICE				65N MAXI			
EFFORT SUR LE LEVIER DE DESACCOUPLEMENT PC/PL UNMATING FORCE ON THE SLIDER DEVICE				65N MAXI			
EFFICACITE DE VERROUILLAGE FULL ENGAGED EFFICIENCY				200N MINI			
CLASSE DE TEMPERATURE OPERATING TEMPERATURE				-40°C / +125°C			
CLASSE DE VIBRATIONS VIBRATION CLASS				15 g			
CLASSE D'ETANCHEITE SEALING CLASS				±0.5 Bar 1PX9K		(L)	
- - - - -							
- DELPHI P/N ADDED							
- - - - -							
- - - - -							
- B7 GREEN CODING DETAILS ADDED IN TABLE							
- B7 VIEW MOVED TO D5							
- CHANGE REVISION OF TPA (B WAS A)							
- CHANGE REVISION OF SEALED VERSION CONNECTOR AND HOUSING (D WAS C)							
- ADD DELPHI PART NUMBER							
- ADD DELPHI LOGO							
- REMOVE OF UNSEALED VERSIONS, WHICH ARE ONLY PRODUCED IN A VERSION							
- REVIEW OF TOLERANCES TO BE ACCORDANCE WITH OTHER CUSTOMER DRAWINGS							
- CHANGE TO IMPROVE TPA CLOSING FOR AUTOMATIC CONTROL							
ECN NO. NUMERO ECN				CHANGE DESCRIPTION MODIFICATION			
PROJECT SPEC. SPECIF. PRODUIT		TRACKING SPEC. SPECIF. ENBAISAGE		APPLICATION SPEC. SPECIF. APPLICATION		COPYRIGHT DELPHI CORPORATION AND/OR ITS AFFILIATES. ALL RIGHTS RESERVED. REVISED THIS DRAWING IS THE PROPERTY OF DELPHI CORPORATION AND CONTAINS DELPHI CONFIDENTIAL INFORMATION. THE REPRODUCTION, DISTRIBUTION AND/OR UTILIZATION OF THIS DRAWING OR ITS RELATED OR MAIN DATA, IN ANY FORM OR CONNECTION TO ANY CONTENT, WITHOUT EXPRESS AUTHORIZATION, IS PROHIBITED.	
TOLERANCES TOLERANCES		MATERIAL : MATIERE :		SEE TABLE		DELPHI II	
COLOUR : COULEUR :		SEE TABLE		SEE TABLE		DELPHI II	
DATE DATE		NAME NOM		ECU LOG : Code CODE B E		F	
CMC 48W X VERSION		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET		STATE ETAT		DRAWING NUMBER REF. PLAN	
CMC PROJECT		PROJECT PROJET					

PRINCIPALES PROPRIETES MECANIQUES MAIN MECHANICAL PROPERTIES	CT 0635	CT 15
FORCE D'INSERTION D'UN CONTACT TERMINAL INSERTION FORCE	10N MAXI	12N MAXI
EFFORT DE POLARISATION D'UN CONTACT A 90° ET 180° TERMINAL POLARISATION FORCE AT 90° AND 180°	24 MINI	30 MINI
EFFORT DE RETENTION AVEC DV RETENTION FORCE WITH SECONDARY LOCK	80N MINI	100N MINI
EFFORT SUR LE LEVIER D'ACCOUPLEMENT PC/PL MATING FORCE ON THE SLIDER DEVICE		65N MAXI
EFFORT SUR LE LEVIER DE DESACCOUPLEMENT PC/PL UNMATING FORCE ON THE SLIDER DEVICE		65N MAXI
EFFICACITE DE VERROUILLAGE FULL ENGAGED EFFICIENCY		200N MINI
CLASSE DE TEMPERATURE OPERATING TEMPERATURE		-40°C / +125°C
CLASSE DE VIBRATIONS VIBRATION CLASS		15 g
CLASSE D'ETANCHEITE SEALING CLASS		±0.5 Bar 1PX9K

[illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Aptiv:](#)

[PPI0001494](#) [PPI0001495-B](#) [PPI0001496](#) [PPI0001497](#) [PPI0001494-B](#) [PPI0001496-B](#)