


FEMALE-FEMALE HERMETIC ADAPTOR


R161.753.000

BULKHEAD TYPE - PANEL SEAL



Series : N

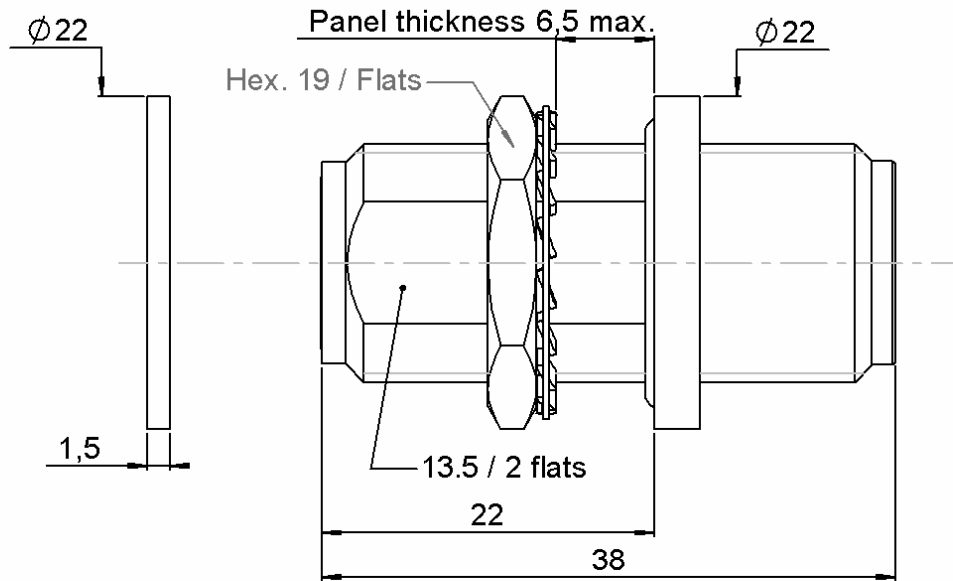


PANEL CUT OUT



	mm	
	Maxi	mini
A	16.1	16
B	13.7	13.6

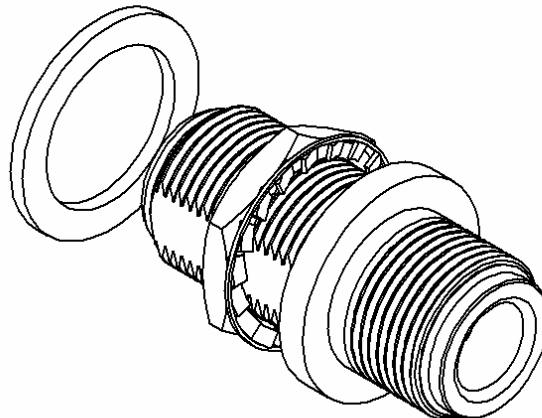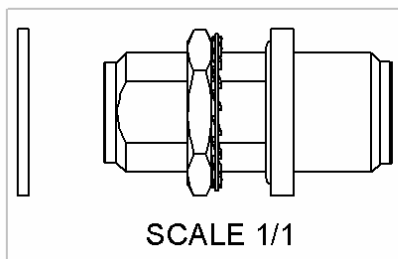

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
BODY	BRASS	BBR 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2
OUTER CONTACT	BRASS	BBR 2
INSULATOR	PTFE+GLASS BEAD	
GASKET	BLACK FLUOROCARBON	
OTHERS PARTS	BRASS	BBR 2
-	-	-
-	-	-

Issue : 1130 E

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL R

FEMALE-FEMALE HERMETIC ADAPTOR**R161.753.000****BULKHEAD TYPE - PANEL SEAL**

Series : N

PACKAGING

Standard	Unit	Other
50	'W' option	Contact us

SPECIFICATION**LEA COAN14HO
N 282 Rev3****ELECTRICAL CHARACTERISTICS**

Impedance	50	Ω
Frequency	0-11	GHz
VSWR	1.45 + 0,0000	x F(GHz) Maxi
Insertion loss	0.10	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (101)	- F(GHz)) dB Maxi
Voltage rating	1400	Veff Maxi
Dielectric withstanding voltage	2500	Veff mini
Insulation resistance	5000	M Ω mini

ENVIRONMENTAL

Operating temperature	-55/+155	$^{\circ}\text{C}$
Hermetic seal	10-6	Atm.cm3/s
Panel leakage	IP67	

OTHER CHARACTERISTICS

Assembly instruction

Others :

-

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini
Recommended torque	
Mating	NA N.cm
Panel nut	500 N.cm
Mating life	500 Cycles mini
Weight	47,7000 g

Issue : 1130 E

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

R161753000