
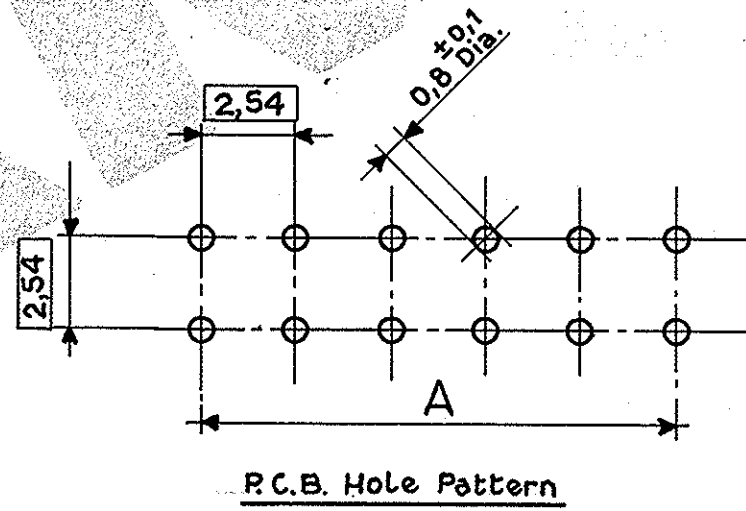
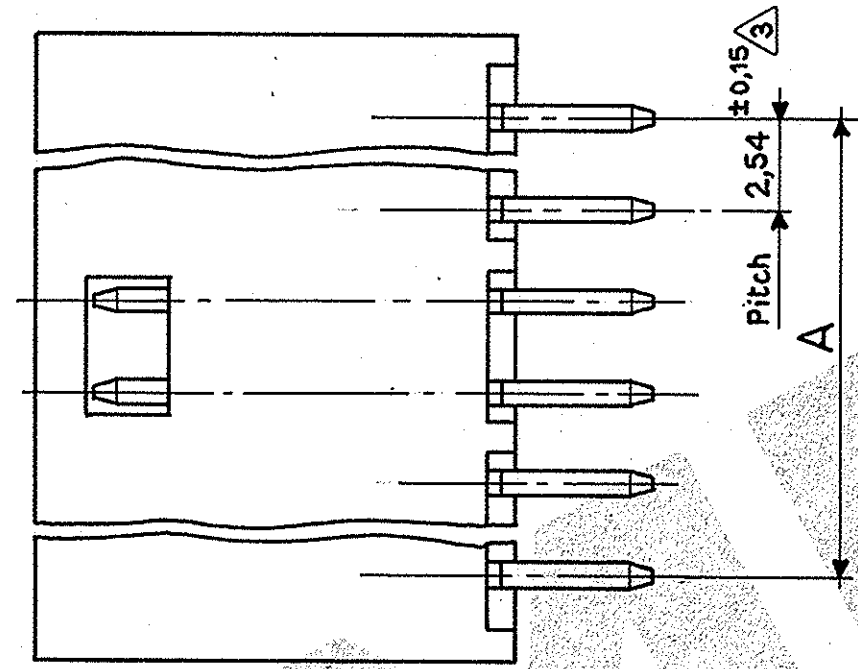
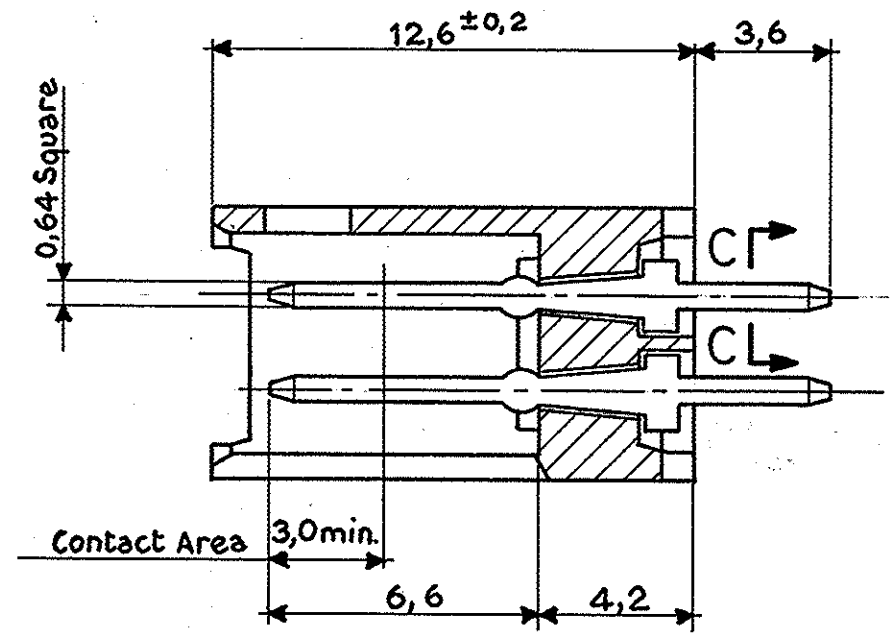
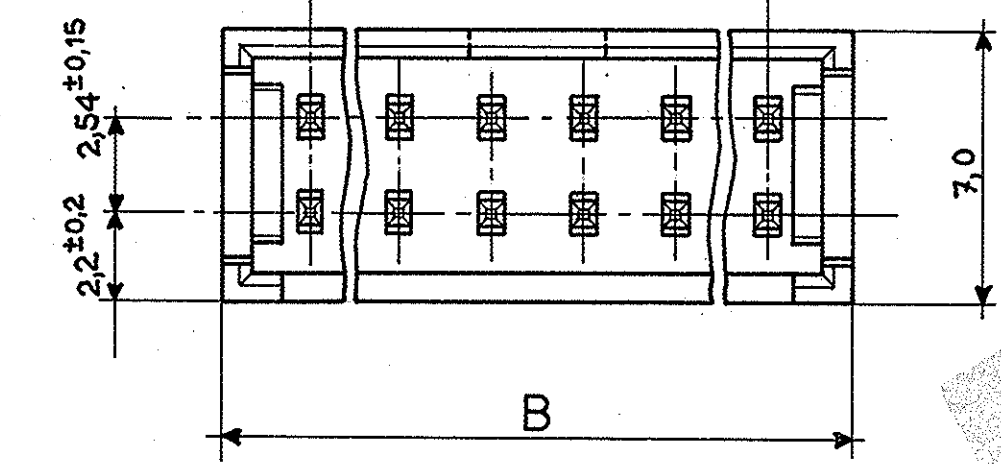


Notes:

- 1 Glassfiber Filled Polyester U.L. 94 V-0, (Flame Retardant) Black Color.
- 2 Brass Duplex Plated 0,4 µm Gold On Contact Area And 3,0mm Min T/I.N. On Solder Area, Over Nickel.
- 3 Non-Cumulative Tolerance.
- 4 OBSOLETE

Way Number	A	B	—	Part Number
22×2	53,34	58,5		281917-4 4
15×2	35,56	40,7		281917-3
8×2	17,78	22,9		281917-2
4×2	7,62	12,7		281917-1

See Note 1 2	See Note 1 2	See Table
FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	NUMERO (PART NUMBER)
<b>CUSTOMER DWG.</b> FOR REFERENCE ONLY		<b>DISEGNO PER CLIENTE</b> SOLO PER RIFERIMENTO
THIS DRAWING IS UNPUBLISHED		RELEASE FOR PUBLICATION 1988
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA ALL INTERNATIONAL RIGHT RESERVED AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING		
TOLLERANZE: SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES UNLESS OTHERWISE SPECIFIED)	DIAM. ISOLANTE (INS. DIA. RANGE)	RANGO FILO (WIRE RANGE)
± 0,3	—	—
ANGOLI (ANGLES) ± 2°	AMP ITALIA S.p.A. Corso F.lli Cervi, 15 COLLEGNO (TORINO)	
DIS. (DR.) Bassano 15-6-88	DESCRIZIONE (DESCRIPTION) AMPMODU II Header Ass'y	
CONT. (CHK) J. Camar 22/5/89	Double Row, Straight Ver. (with Special)	
APP. (APP.)	LOC. SIZE NUMERO (DWG NO)	REV. FOGLIO (SHEET)
	1 A3 C - 281917	D 1 DI 1

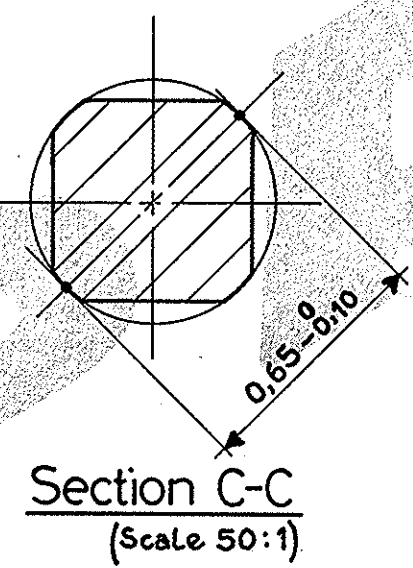

D	SOLDER AREA PLATING 3MM MIN T/N WAS 2.5MM	30
C	UNLEAD-CHANGED PER EC-ET00-0081-04	30
A	OBSCOLET F.N. 281917-4 ET00-0256-72	30
REV.	REVISIONI (REVISION RECORD)	DIS. DATA (DR) (DATE)

DISTRIBUZIONE  
(PRINT DIST.)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[281917-1](#)