
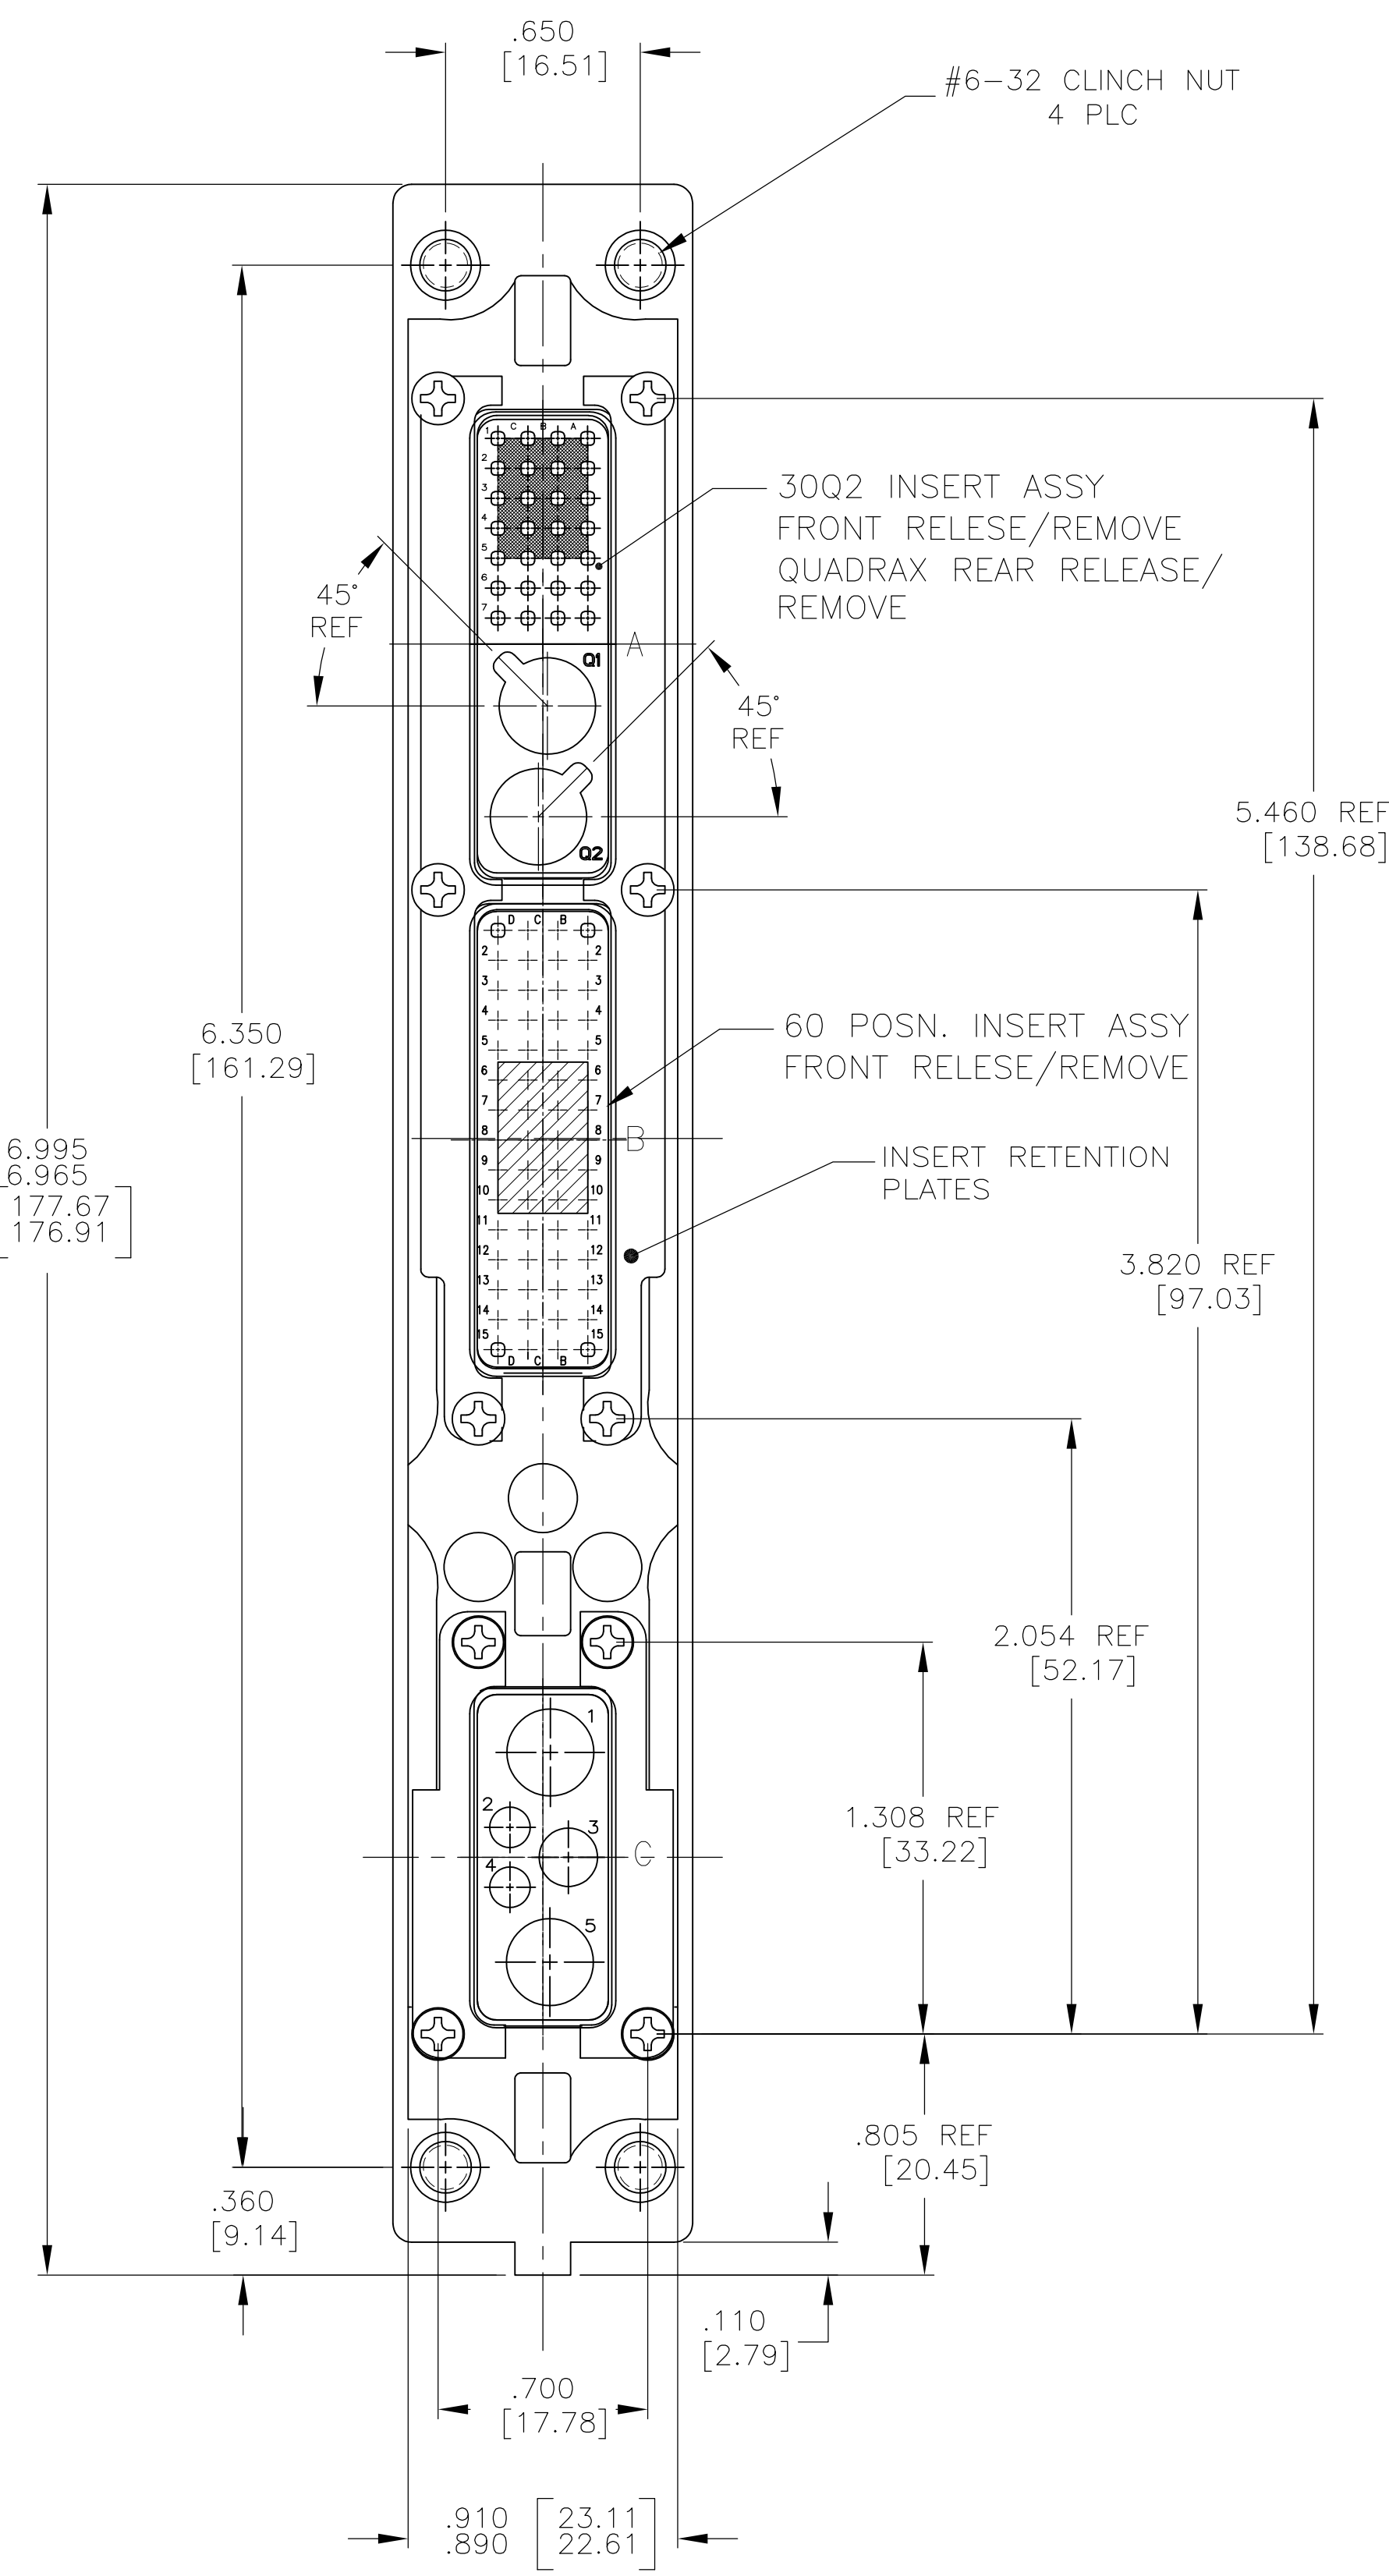
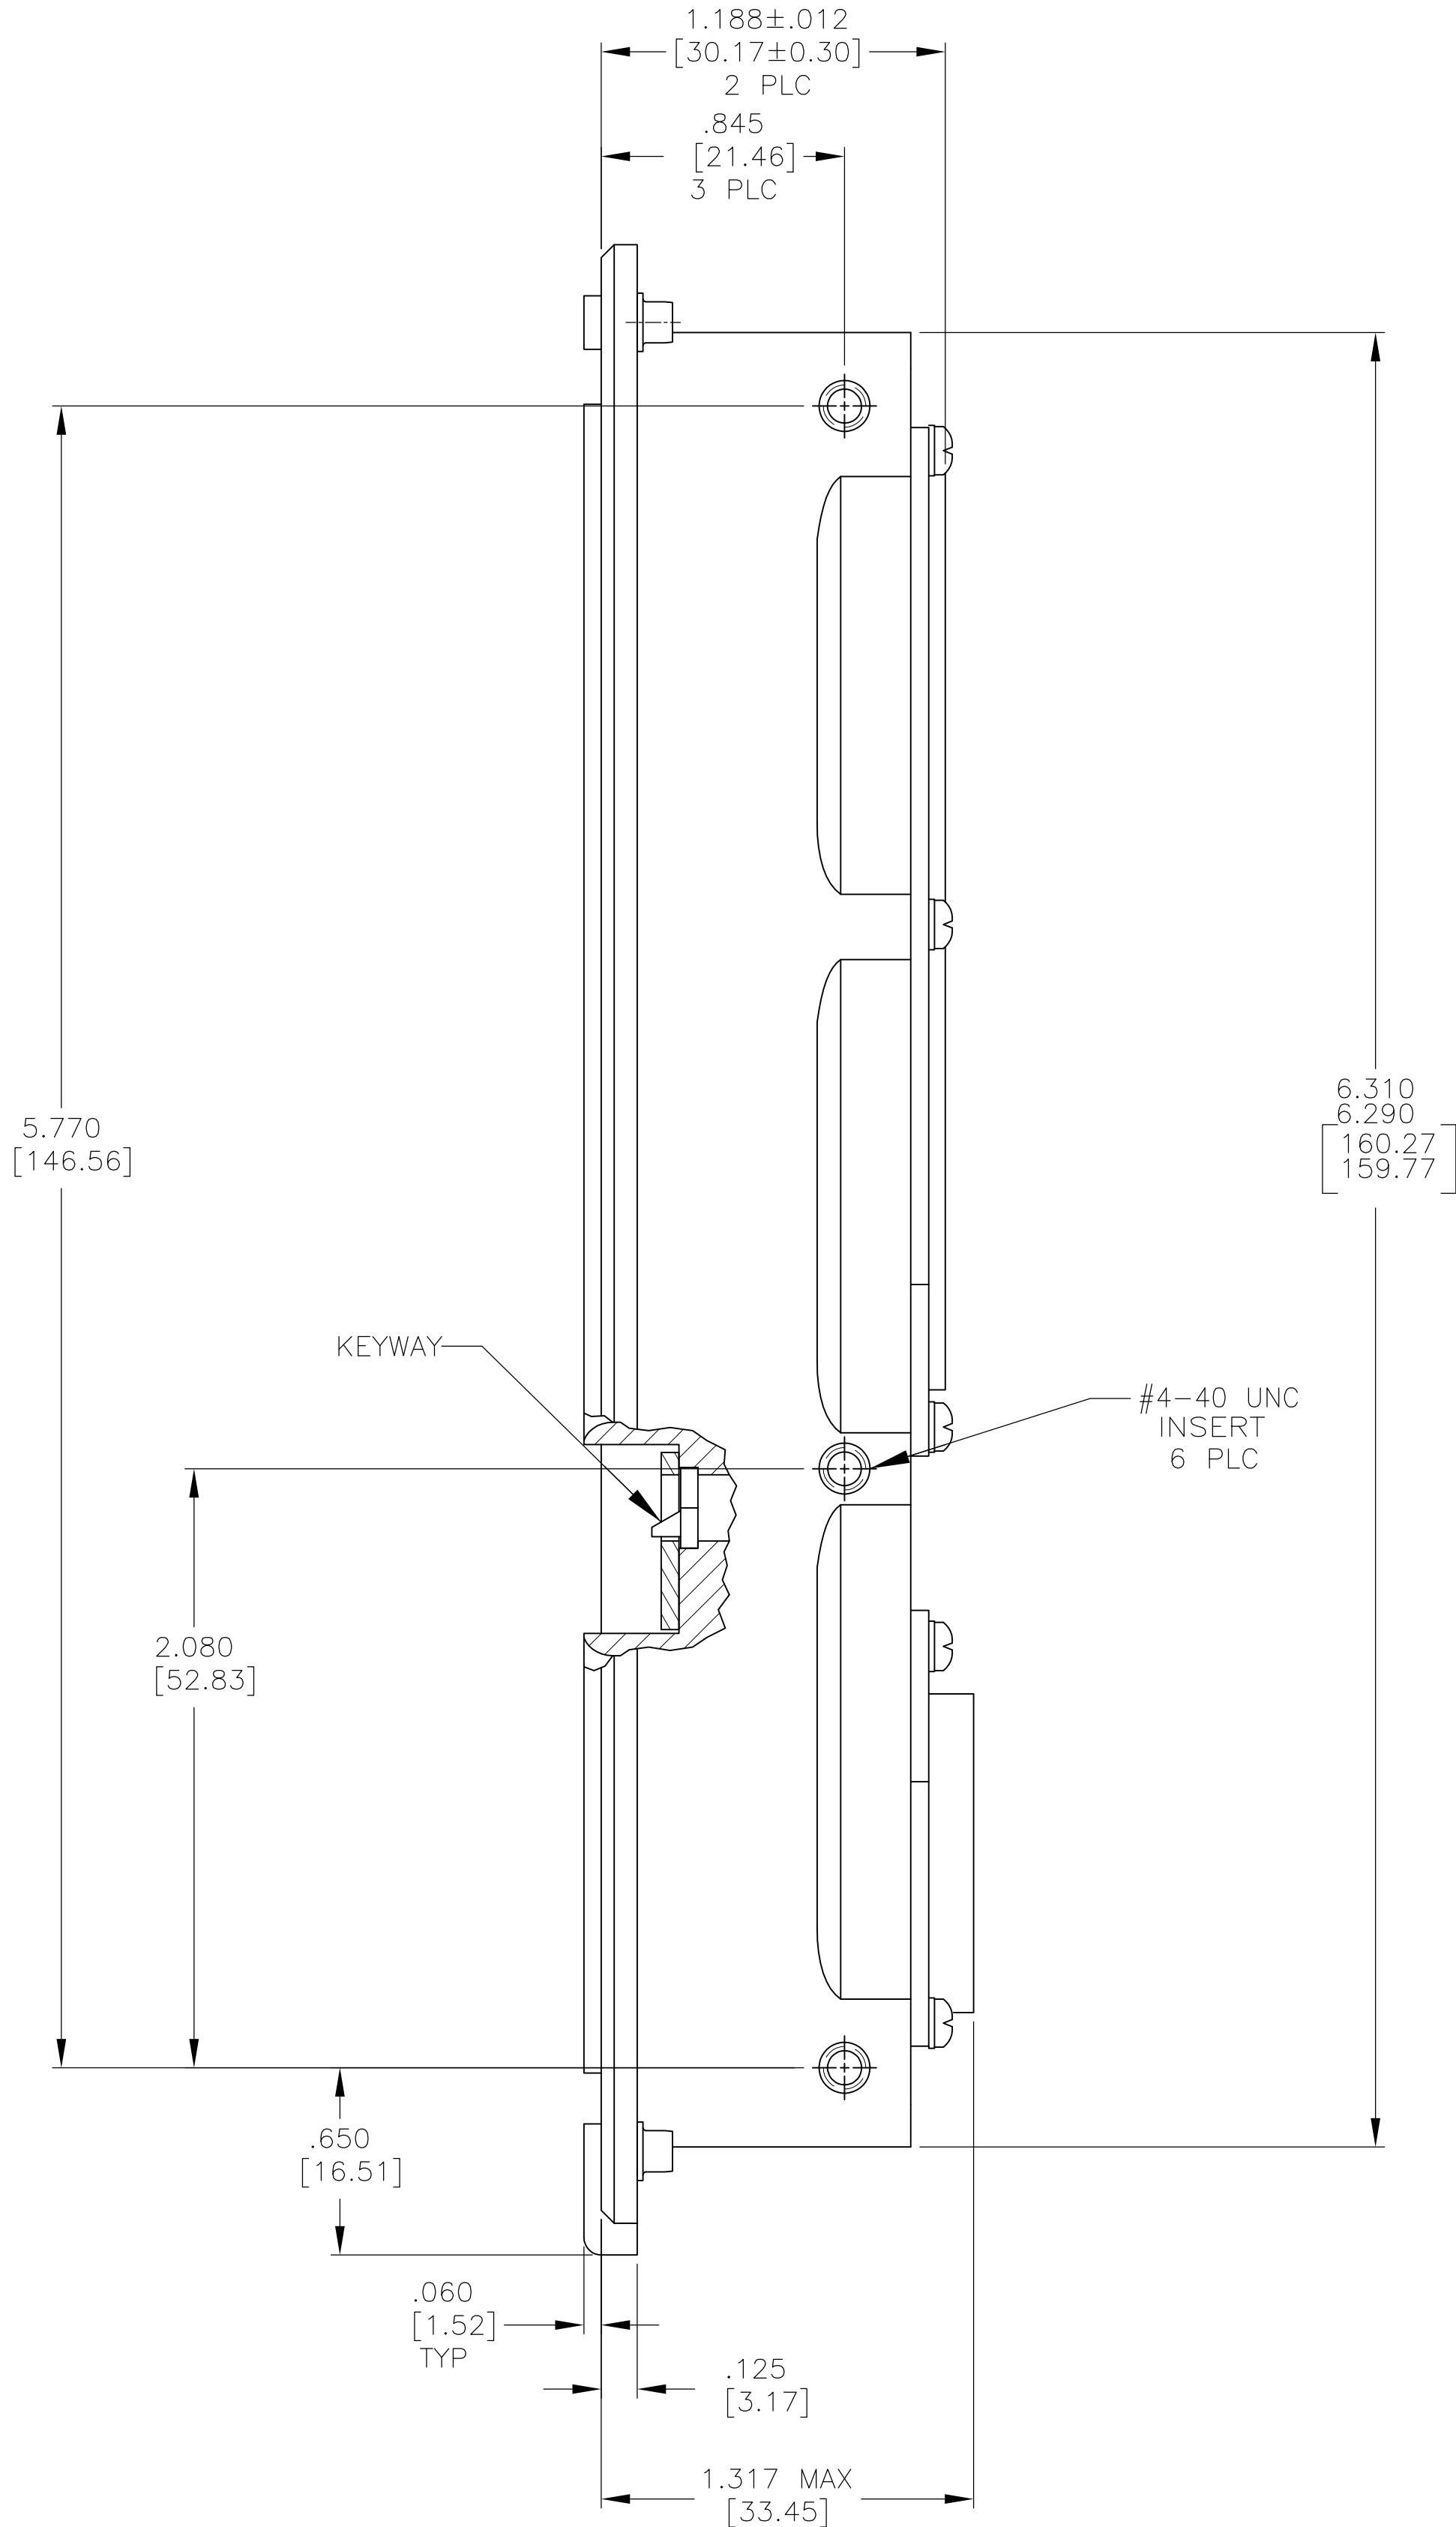


D

C

B

A

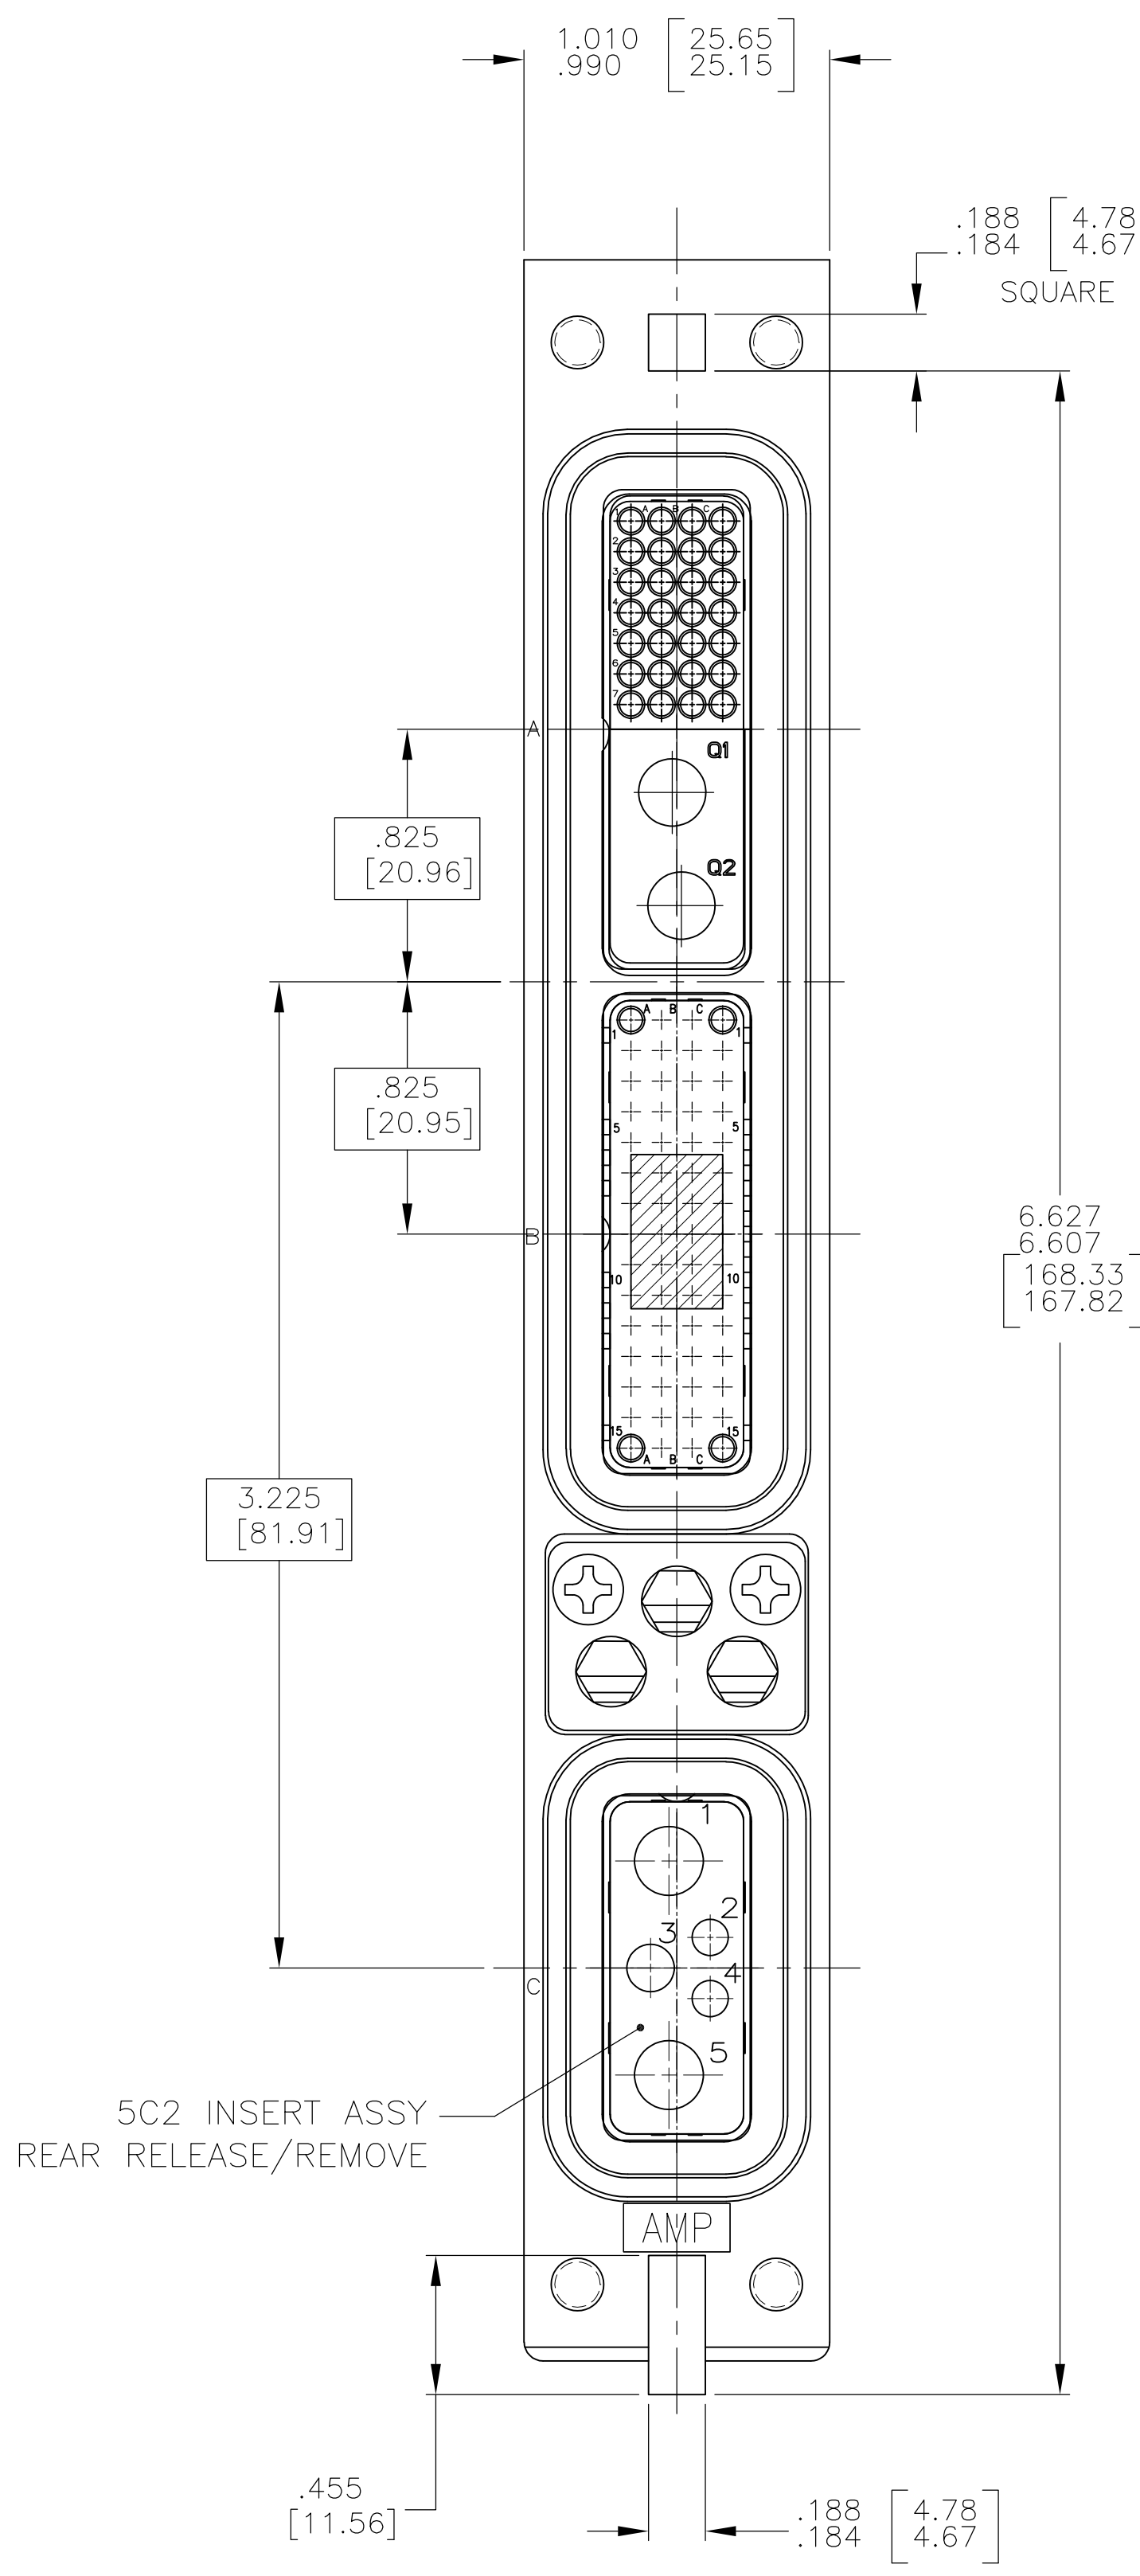

COMPONENT	MATERIAL	FINISH
SHELL	DIE CAST ALUMINUM PER ASTM-B-85	ELECTROLESS NICKEL PER MIL-C-26074 CLASS 4, GRADE B
RETENTION PLATES	ALUMINUM ALLOY PER ASTM-B-209	ELECTROLESS NICKEL PER MIL-C-26074 CLASS 4, GRADE B
SCREWS AND LOCKWASHERS	STEEL OR STAINLESS STEEL	CHROMATE OVER ZINC OR PASSIVATED
POLARIZING KEYS	ZINC ALLOY PER ASTM-B-86	—
POLARIZING KEY RETAINING PLATE	ALUMINUM ALLOY PER ASTM-B-209	BLUE ANODIZED PER MIL-A-8625
INSERTS	THERMOSET	—
QUADRAX INSERT HALF	ALUMINUM ALLOY	ELECTROLESS NICKEL

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES [mm]

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± —

1 PLC ± —

2 PLC ± —

3 PLC ± .005 [0.13]

4 PLC ± —

ANGLES ± —

MATERIAL
SEE TABLE

FINISH
SEE TABLE

DWN
C.C.THOMAS 1-14-09

CHK
K.THACKSTON 1-14-09

APVD
K.THACKSTON 1-14-09

PRODUCT SPEC

APPLICATION SPEC

WEIGHT —

CUSTOMER DRAWING

NAME

RCPT ASSY,SIZE 1,ARINC 600
(30Q2/60/5C2)

SIZE
A1

CAGE CODE
00779

DRAWING NO
2101141

RESTRICTED TO
—

SCALE 2:1

SHEET 1 OF 1

REV B

Tyco Electronics

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

- CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION
- CONTACTS ARE NOT INCLUDED WITH THIS CONNECTOR.
- KEYING SHOWN IN POSITION "01" FOR REFERENCE ONLY.
SEE TABLE FOR KEYING POSITION.
FOR POSITION "00" KEYING SHIPPED UNASSEMBLED.

16FEB2009

us016412

H:\docmod\2101141_1_c.dwg

AMP 4805 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2101141-1](#)