


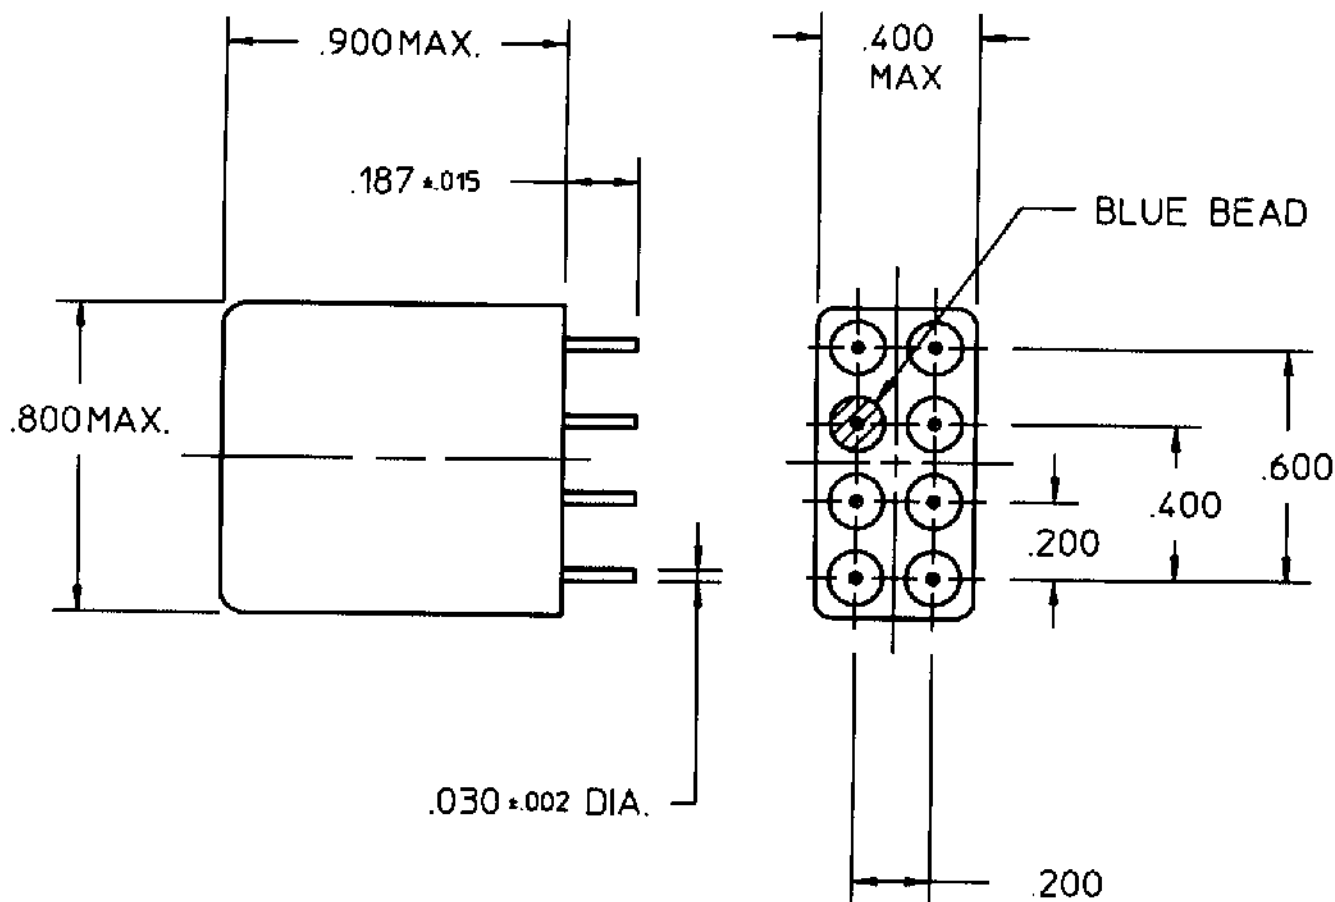

COIL:

RESISTANCE 800 OHMS ± 10%

NOMINAL VOLTAGE 18.0 VDC

MUST OPERATE 11.2 mADC

MUST RELEASE 1.5 mADC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's


SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

BLUE BEAD

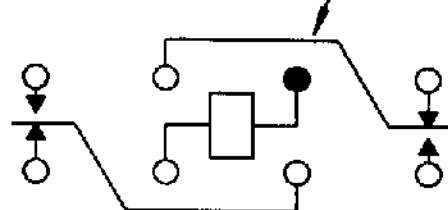

CONTACT RATING: 2 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 8/7/92 CK. 8/7/24/92

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. C. I. I. STD

CUST. NO.

TYPE "33" RELAY

33J-800VG-SIL

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[33J-800VG-SIL](#)