

Miniature PCB Relay OJ / OJE

- 1 pole 8 A, 1NO contact
- Sensitive coil, 200 mW
- 3 kV or 4 kV dielectric strength between coil and contacts
- Miniature size
- RoHS compliant (Directive 2002 / 95 / EC)
as per product date code 0424
- WG Version in accordance to IEC60335-1



F0277-B

Approvals

VDE REG.-Nr. 6835, c  us E82292
Technical data of approved types on request

Contact data	LM4	LMH2
Contact configuration	1 NO	
Contact set	single contact	
Type of interruption	micro disconnection	
Rated current	8 A	
Rated voltage / max.switching voltage AC	250 VAC	
Maximum breaking capacity AC	2000 VA	
Contact material	AgCdO	AgSnO ₂
Mechanical endurance	5x10 ⁶ cycles	
Rated frequency of operation with / without load	10 / 600 min ⁻¹	

Contact ratings

Type	Load	Cycles
OJ-SS-1..LMH2	8 A, 250 VAC, 70 °C, resistive, VDE EN61810-1	5x10 ⁴
OJ-SS-1..LMH2	5 A, 250 VAC, 85 °C, resistive, VDE EN61810-1	1x10 ⁵
OJ-SS-1..LMH2	8 A, 250 VAC, 70 °C, resistive, UL 508	5x10 ⁴
OJ-SS-1..LMH2	5 A, 250 VAC, 85 °C, resistive, UL 508	1x10 ⁵
OJE-SH-1..LMH6	3 A, 230 VAC, 85 °C, resistive, VDE-EN61810-1	2x10 ³

Coil data

Rated coil voltage range DC coil	3 ... 48 VDC
Coil power DC coil	typ. 200 mW
Operative range	2

Coil versions, DC-coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ohm	Rated coil power mW
03	3	2.25	0.15	45±10%	200
05	5	3.75	0.25	125±10%	200
06	6	4.5	0.3	180±10%	200
09	9	6.75	0.45	400±10%	203
12	12	9	0.6	720±10%	200
24	24	18	1.2	2800±10%	206

All figures are given for coil without preenergization, at ambient temperature +23°C
Other coil voltages on request

Miniature PCB Relay OJ / OJE (Continued)

Insulation


Dielectric strength coil-contact circuit	OJ	4000 V _{rms}
	OJE	3000 V _{rms}
open contact circuit		1000 V _{rms}
Clearance / creepage coil-contact circuit		≥ 6/8 mm
Material group of insulation parts		IIIa
Insulation to IEC 60664-1		
Type of insulation coil-contact circuit		basic
open contact circuit		functional
Rated insulation voltage		250 V
Pollution degree		3
Rated voltage system		230/400 V
Overvoltage category		III

Other data


RoHS - Directive 2002/95/EC	compliant as per product date code 0424
Flammability class according to UL94	V-0
For WG version: GWFI to IEC 60335-1	> 850 °C
GWIT to IEC 60335-1	> 775 °C
Ambient temperature range	-30 ... +85°C
Operate- / release time	15/4 ms
Category of protection	RTII - flux proof
Resistance to soldering heat flux-proof version	270° / 10 s
Relay weight	9 g
Packaging unit	500 pcs

PCB layout / terminal assignment

Bottom view on solder pins




S0497-AA



S0497-AB

Dimensions

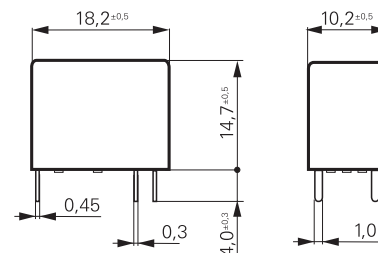

S0498-A

Product key

Type	O J - S - 1 L M H
Dielectric strength	E 3 kV Blank 4 kV
Category of protection	SS flux proof SH washtight
Number of poles	1 1 pole
Coil	Coil code: please refer to coil versions table
Coil version	L sensitive 200 mW
Contact configuration	M 1 NO contact
Contact rating	H 8 A

Contact material

Product key	Version	Contacts	Contact material	Coil	Part number
OJ-SS-103LMH2	flux proof	1 NO contact	AgSnO ₂	3 VDC	1721181-1
OJ-SS-105LMH2				5 VDC	1721181-2
OJ-SS-106LMH2				6 VDC	1721181-3
OJ-SS-109LMH2				9 VDC	1721181-4
OJ-SS-112LMH2				12 VDC	1721181-5
OJ-SS-124LMH2				24 VDC	1721181-6
OJ-SS-105-LMH2-WG	flux proof	1 NO contact	AgSnO ₂	5 VDC	1721874-2
OJ-SS-106-LMH2-WG	materials according IEC 60335-1			6 VDC	1721874-3
OJ-SS-109-LMH2-WG				9 VDC	1721874-4
OJ-SS-112-LMH2-WG				12 VDC	1721874-5
OJ-SS-124-LMH2-WG				24 VDC	1721874-6

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1721181-5](#)