

ECN #	APPRVO.	DATE
1	Mac	8-14-98

SAFETY ORGANIZATIONS

THIS JACK HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET.

UL RECOGNIZED
CSA CERTIFIED

UL 1663
CSA C22.2 No. 182.4

SPECIFICATIONSCONTACTS

MATERIAL: PHOSPHOR BRONZE
PLATING: 50 MICROINCHES GOLD
BARRIER UNDERPLATING: 100 MICROINCHES NICKEL
RESISTANCE:
INITIAL: 20 MILLIOHMS MAXIMUM
AFTER DURABILITY TESTING (500 MATING CYCLES): 30 MILLIOHMS MAXIMUM

FERRITES

TYPE: HIGH RESISTIVITY, NICKEL ZINC CERAMIC
BLOCK: MULTI-APERATURE RECTANGULAR PRISM

SHIELD MATERIAL

SOLDER-PLATED COPPER ALLOY

HOUSING MATERIAL





GLASS-FILLED POLYESTER (UL94V-0)

DIELECTRIC WITHSTANDING VOLTAGE

LINE-TO-LINE AND LINE-TO-GROUND 1000 VAC FOR 60 SECONDS

PRINTED CIRCUIT BOARD RETENTION

BEFORE SOLDERING: 1 LB. MINIMUM
AFTER SOLDERING: 20 LB. MINIMUM

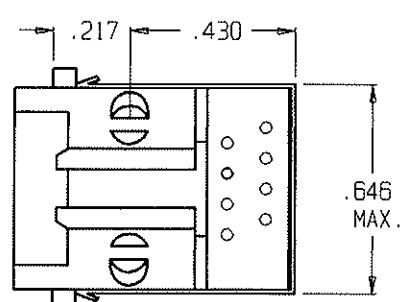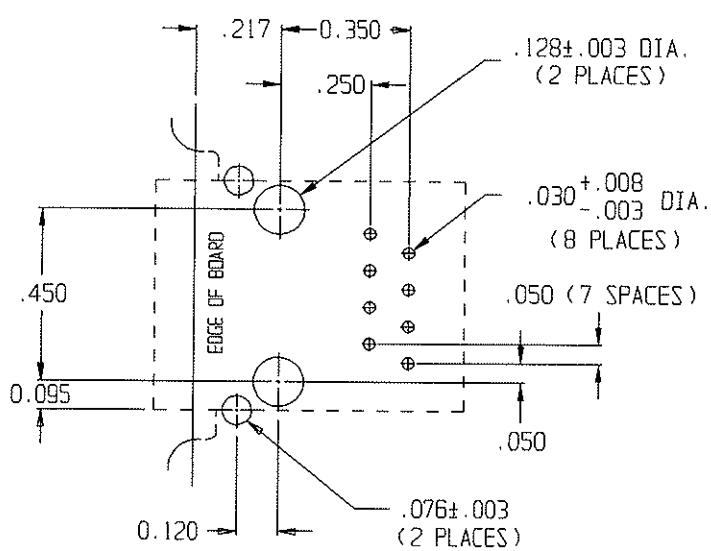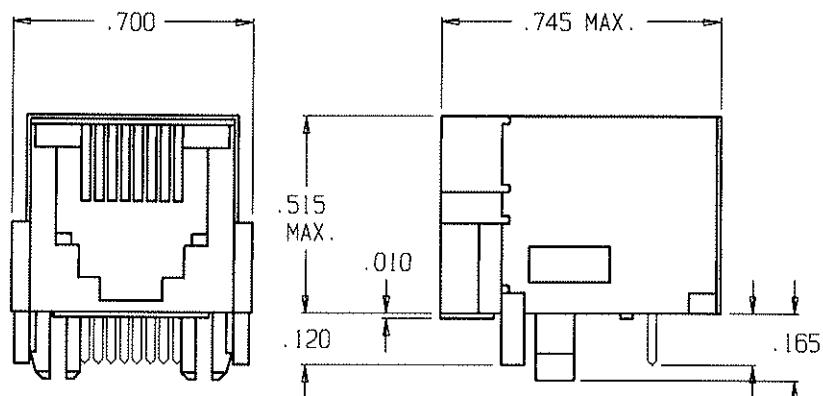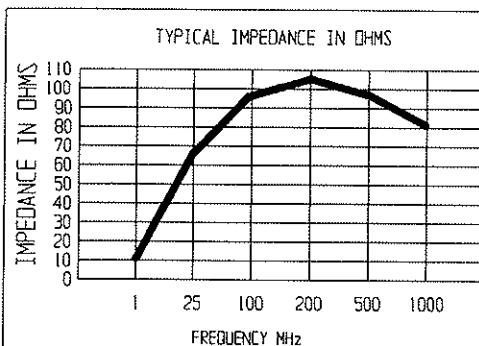

COMPLIES WITH FCC PART 68

PC BOARD LAYOUTTHIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED,
TOLERANCE TO BE ± 0.010
MATERIAL & FINISH: AS SUPPLIED

This document is proprietary to CORCOM INC and is not to be reproduced nor used for manufacturing purposes except on CORCOM'S prior written consent.

 **corcom**
844 E. ROCKLAND RD. LIBERTYVILLE IL 60048

FILTERED MODULAR JACK

CAO FILE:	G:\CDR\RJ458N4B00	SCALE:	NTS	DATE:	8-14-98	CATALOG NO.:	REV.
DRW. BY:	SD	DRIG:	MAC	RJ45-8N4-B	00		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[RJ45-8N4-B](#)