




ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	22.0	± max
T:		± max
Lead Diameter		± nom
S:		± nom
L:		± nom
Coating Lead Run Down (straight Leads)		± max
B:		± nom
C:		± nom

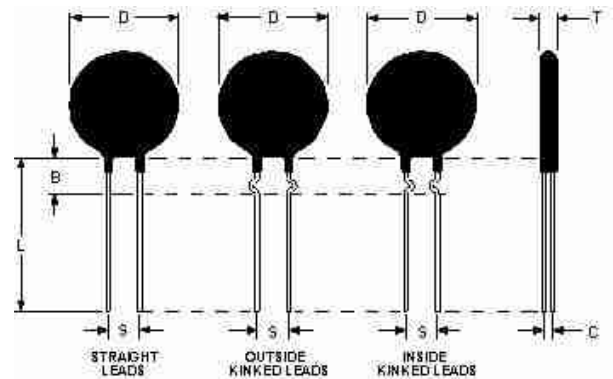

Electrical Specifications

Resistance:	220. (Ω	± 25 %
Max Steady State Current upto 65°C:	2.00	A
Max Rec. Energy Rating:	72	J
Actual Failure Instantaneous Energy:	150	J
Maximum Capacitance @ 120 VAC:	5,001	µf
Maximum Capacitance @ 240 VAC:	1,250	µf
Resistance @ 100% Max Current:		Ω
Resistance @ 50% Max Current:	3.81	Ω
Body Temperature at 100% Max Current:		°c
Dissipation Constant:	32.4	mw/°c
Thermal Time Constant:	94	Sec.
Material Type (for Beta and Curve):	L	

SL22 22102

Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: a

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ametherm:](#)

[SL22 22102](#)