



ALUMINUM ELECTROLYTIC CAPACITORS

UWP 5.5mmL Chip Type, Bi-Polarized

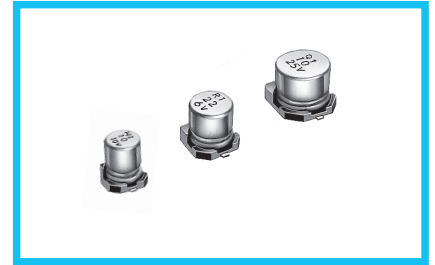


- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).
- AEC-Q200 compliant. Please contact us for details.



Specifications

Item	Performance Characteristics							
Category Temperature Range	-40 to +85°C							
Rated Voltage Range	6.3 to 50V							
Rated Capacitance Range	0.1 to 100μF							
Capacitance Tolerance	±20% at 120Hz, 20°C							
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.05CV or 10 (μA), whichever is greater.							
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C							
	Rated voltage (V)	6.3	10	16	25	35	50	
Stability at Low Temperature	Measurement frequency : 120Hz							
	Rated voltage (V)		6.3	10	16	25	35	50
	Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C	4	3	2	2	2	2
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 85°C with the polarity inverted every 250 hours.		Capacitance change					Within ±20% of the initial capacitance value
			tan δ					200% or less than the initial specified value
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.		Leakage current					Less than or equal to the initial specified value
			Capacitance change					Within ±10% of the initial capacitance value
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.		tan δ					Less than or equal to the initial specified value
			Leakage current					Less than or equal to the initial specified value
Marking	Black print on the case top.							


Chip Type

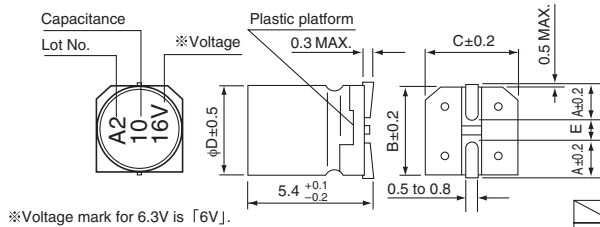

※Voltage mark for 6.3V is 「6V」.

φD	4	5	6.3	8
A	1.8	2.1	2.4	3.3
B	4.3	5.3	6.6	8.3
C	4.3	5.3	6.6	8.3
E	1.0	1.3	2.2	2.3

Type numbering system (Example : 16V 10μF)

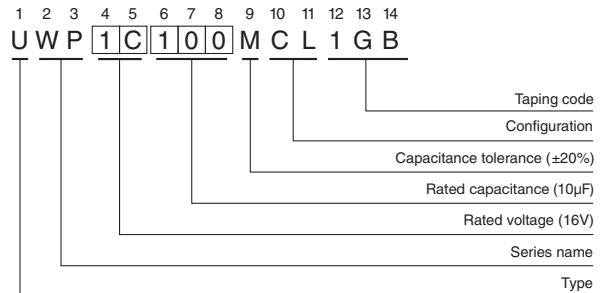

Dimensions

Cap. (μF)	Code	V		6.3		10		16		25		35		50	
		0J	1A	1C	1E	1V	1H								
0.1	0R1													4	1.0
0.22	R22													4	2.0
0.33	R33													4	2.8
0.47	R47													4	4.0
1	010													4	8.4
2.2	2R2											4	8.4	5	13
3.3	3R3								5	12	5	16	5	17	
4.7	4R7							4	12	5	16	5	18	6.3	20
10	100			4	17	5	23	6.3	27	6.3	29	8	36		
22	220	5	28	6.3	33	6.3	37	8	50	8	54				
33	330	6.3	37	6.3	41	6.3	49	8	61						
47	470	6.3	45	8	61	8	75								
100	101	8	82												

Rated ripple current (mArms) at 85°C 120Hz

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UUN(p.166) if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

[UWP0J101MCL1GB](#) [UWP0J220MCL1GB](#) [UWP0J330MCL1GB](#) [UWP0J470MCL1GB](#) [UWP1A100MCL1GB](#)
[UWP1A220MCL1GB](#) [UWP1A330MCL1GB](#) [UWP1A470MCL1GB](#) [UWP1C100MCL1GB](#) [UWP1C220MCL1GB](#)
[UWP1C330MCL1GB](#) [UWP1C470MCL1GB](#) [UWP1C4R7MCL1GB](#) [UWP1E100MCL1GB](#) [UWP1E220MCL1GB](#)
[UWP1E330MCL1GB](#) [UWP1E3R3MCL1GB](#) [UWP1E4R7MCL1GB](#) [UWP1H010MCL1GB](#) [UWP1H0R1MCL1GB](#)
[UWP1H100MCL1GB](#) [UWP1H2R2MCL1GB](#) [UWP1H3R3MCL1GB](#) [UWP1H4R7MCL1GB](#) [UWP1HR22MCL1GB](#)
[UWP1HR33MCL1GB](#) [UWP1HR47MCL1GB](#) [UWP1V100MCL1GB](#) [UWP1V220MCL1GB](#) [UWP1V2R2MCL1GB](#)
[UWP1V3R3MCL1GB](#) [UWJ1V4R7MCL1GB](#)