
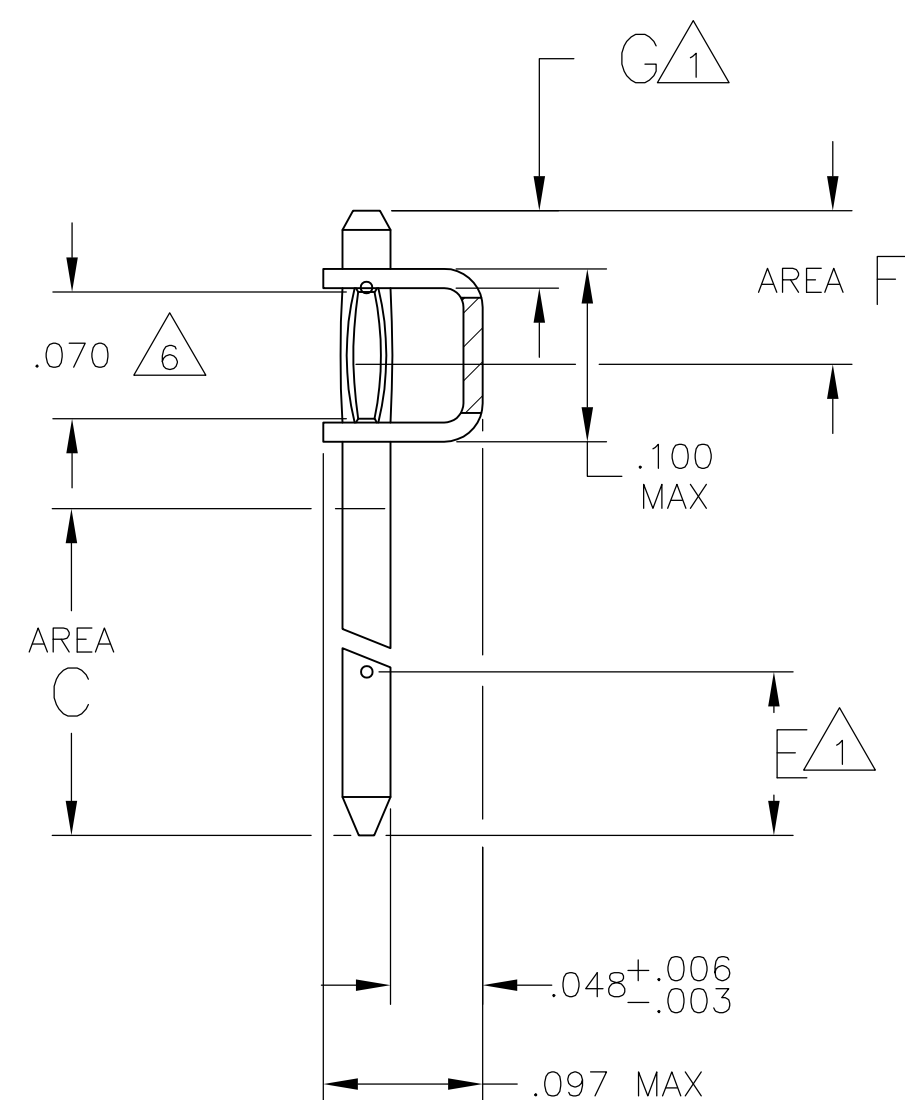


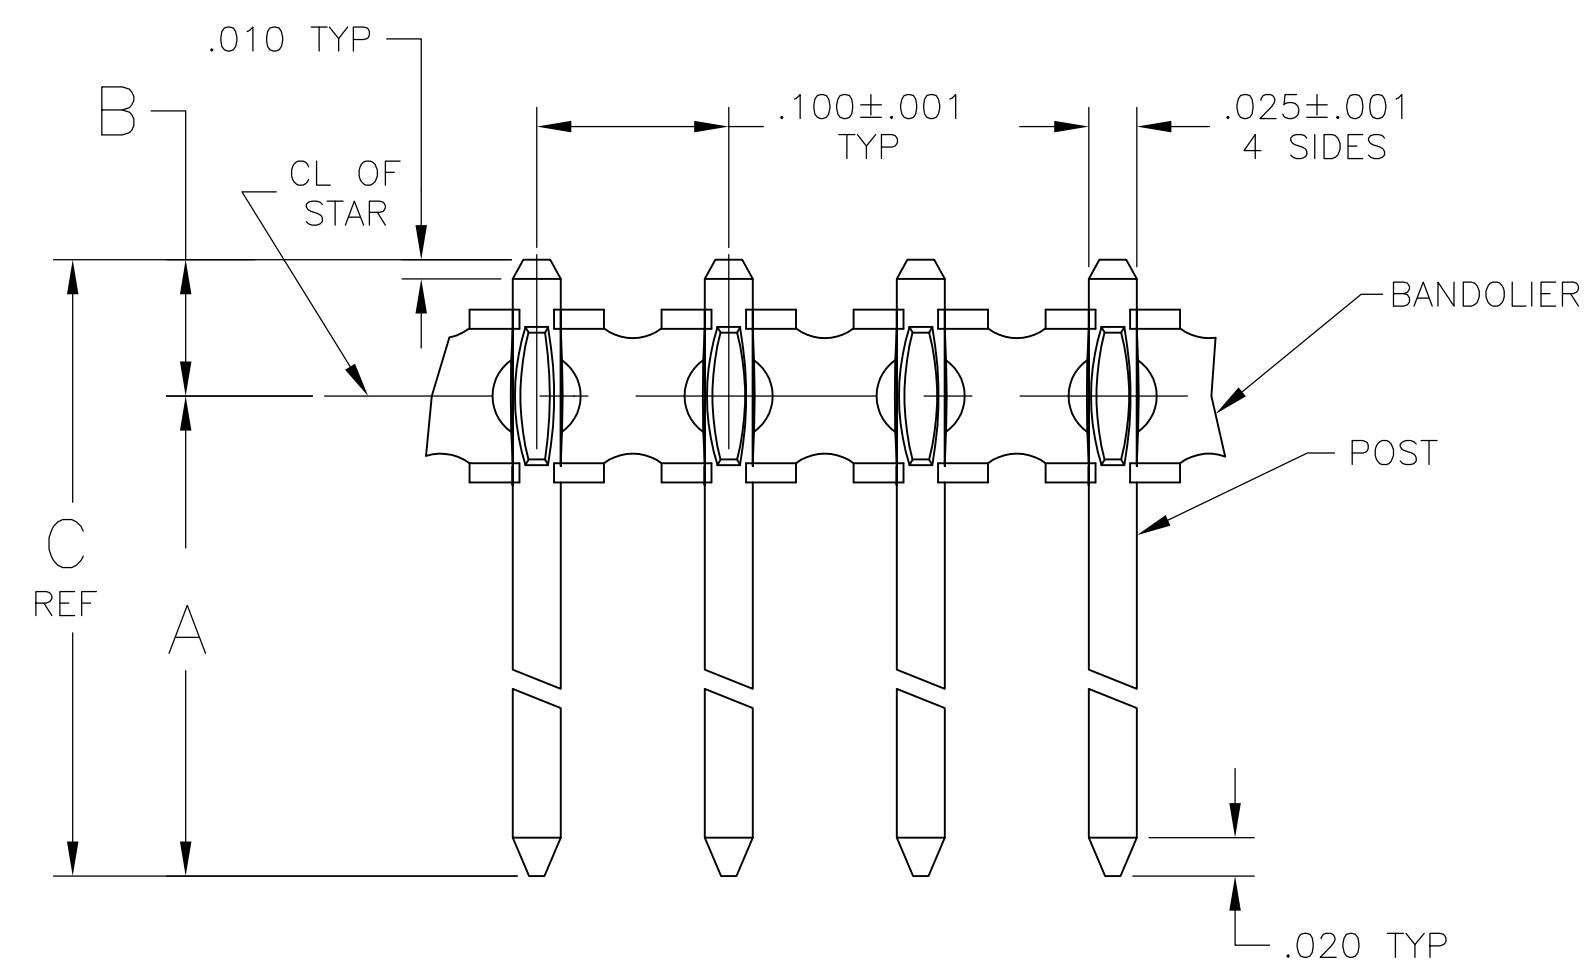

-  POINT OF MEASUREMENT FOR PLATING THICKNESS

- 2 .000030 GOLD ON AREA D, .000100 - .000200
MATTE TIN-LEAD ON AREA F, ALL OVER .000050 NICKEL
ENTIRE POST

- 3 .000100 - .000200 BRIGHT TIN-LEAD OVER .000050
NICKEL ENTIRE POST

4. RECOMMENDED P.C.BOARD HOLE SIZE:

P C BOARD THICKNESS	PLATED HOLE SIZE	UNPLATED HOLE SIZE
.062	.034±.002	.036±.002
.093	.034±.002	.036±.002
.125	.034±.002	.036±.002

- 5 .000015 GOLD ON AREA D, .000100 - .000200 MATTE
TIN-LEAD ON AREA F, ALL OVER .000050 NICKEL ENTIRE
POST.

- 6 DIMENSION PERTAINS TO THE LENGTH OF THE INTERFERENCE AREA OF THE STAR.

- 7 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.

- 8 .000030 GOLD ON AREA D, .000100-.000200 MATTE TIN ON AREA F.
ALL OVER .000050 NICKEL ENTIRE POST.

- 9 .000100-.000200 MATTE TIN OVER .000050 NICKEL ENTIRE PAST.

- 10 .000015 GOLD ON AREA D, .000100—.000200 MATTE TIN ON AREA F,
ALL OVER .000050 NICKEL ENTIRE POST.

-  ROHS 2002/95/EC COMPLIANT.

- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

[illegible][illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-103577-5](#)