

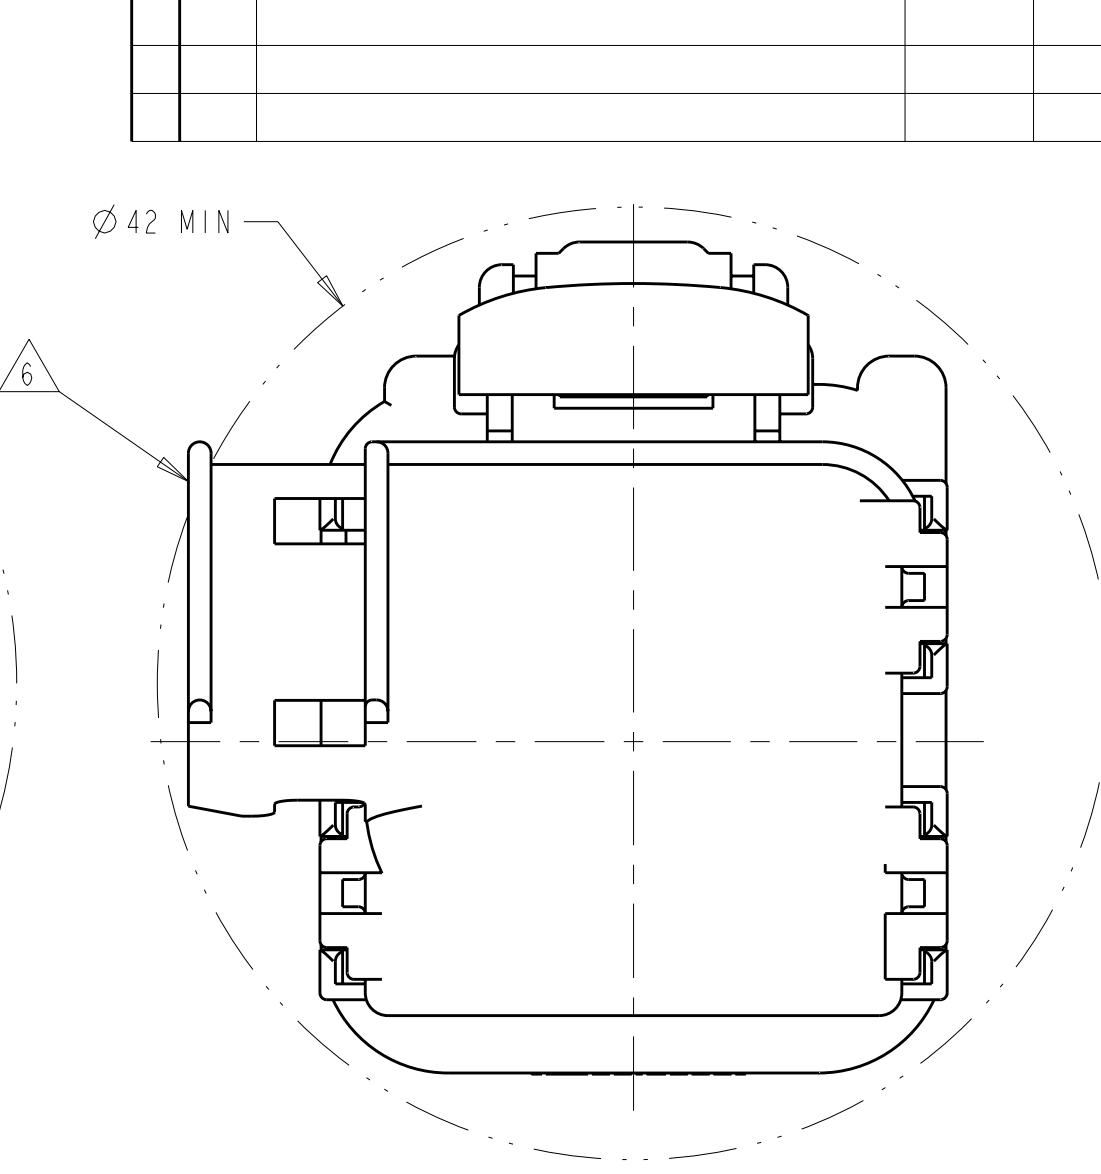


OPTION "F"

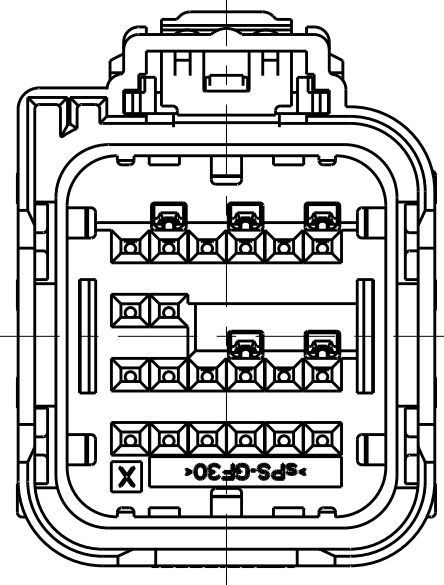

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

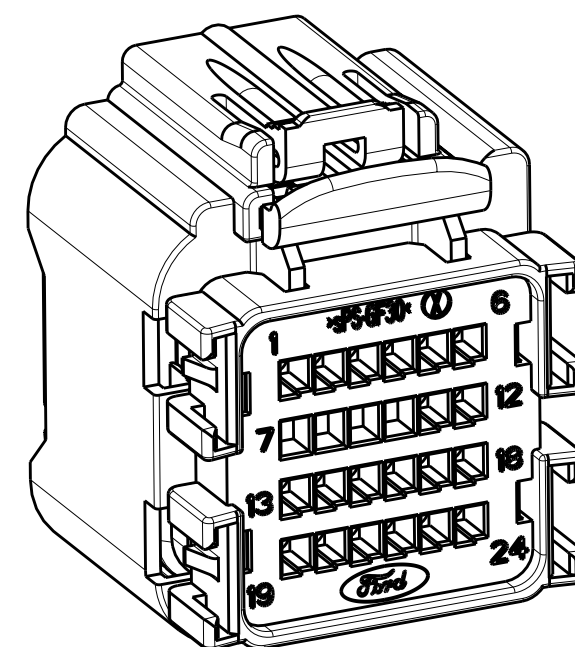

SCALE 2:1



ITEM	QUANTITY	ASSEMBLY PART NUMBER	
		7	6
1	1	1	5
2	1	1	5
3	1	1	5
4	1	1	5
5	1	1	5
6	1	1	5
7	1	1	5
8	1	1	5
9	1	1	5
10	1	1	5
11	1	1	5
12	1	1	5
13	1	1	5
14	1	1	5
15	1	1	5
16	1	1	5
17	1	1	5
18	1	1	5
19	1	1	5
20	1	1	5
21	1	1	5
22	1	1	5
23	1	1	5
24	1	1	5
25	1	1	5
26	1	1	5
27	1	1	5
28	1	1	5
29	1	1	5
30	1	1	5
31	1	1	5
32	1	1	5
33	1	1	5
34	1	1	5
35	1	1	5
36	1	1	5
37	1	1	5
38	1	1	5
39	1	1	5
40	1	1	5
41	1	1	5
42	1	1	5
43	1	1	5
44	1	1	5
45	1	1	5
46	1	1	5
47	1	1	5
48	1	1	5
49	1	1	5
50	1	1	5
51	1	1	5
52	1	1	5
53	1	1	5
54	1	1	5
55	1	1	5
56	1	1	5
57	1	1	5
58	1	1	5
59	1	1	5
60	1	1	5
61	1	1	5
62	1	1	5
63	1	1	5
64	1	1	5
65	1	1	5
66	1	1	5
67	1	1	5
68	1	1	5
69	1	1	5
70	1	1	5
71	1	1	5
72	1	1	5
73	1	1	5
74	1	1	5
75	1	1	5
76	1	1	5
77	1	1	5
78	1	1	5
79	1	1	5
80	1	1	5
81	1	1	5
82	1	1	5
83	1	1	5
84	1	1	5
85	1	1	5
86	1	1	5
87	1	1	5
88	1	1	5
89	1	1	5
90	1	1	5
91	1	1	5
92	1	1	5
93	1	1	5
94	1	1	5
95	1	1	5
96	1	1	5
97	1	1	5
98	1	1	5
99	1	1	5
100	1	1	5
101	1	1	5
102	1	1	5
103	1	1	5
104	1	1	5
105	1	1	5
106	1	1	5
107	1	1	5
108	1	1	5
109	1	1	5
110	1	1	5
111	1	1	5
112	1	1	5
113	1	1	5
114	1	1	5
115	1	1	5
116	1	1	5
117	1	1	5
118	1	1	5
119	1	1	5
120	1	1	5
121	1	1	5
122	1	1	5
123	1	1	5
124	1	1	5
125	1	1	5
126	1	1	5
127	1	1	5
128	1	1	5
129	1	1	5
130	1	1	5
131	1	1	5
132	1	1	5
133	1	1	5
134	1	1	5
135	1	1	5
136	1	1	5
137	1	1	5
138	1	1	5
139			

ITEM

CPA	PBT-GF15	RED
PERIMETER SEAL	SILICONE	GREEN
GROMMET	SILICONE	BROWN
SHORTING BAR	S.S.	SEE COMPONENT DRAWING
COVER	PA66 35% GF	BLACK
SPACER FOR SHORTING BAR APPLICATIONS	sPS 30% GF	NATURAL
PLUG WITH KEYING OPTION "D" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
PLUG WITH KEYING OPTION "C" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
PLUG WITH KEYING OPTION "B" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
PLUG WITH KEYING OPTION "A" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
DESCRIPTION	MATERIAL	FINISH/COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT FOR THE CUSTOMER'S INFORMATION. ANY CHANGES TO THIS DRAWING MUST BE APPROVED BY THE CUSTOMER. THIS DRAWING IS THE PROPERTY OF TYCO ELECTRONICS. IT IS TO BE USED FOR THE CUSTOMER'S INFORMATION ONLY AND IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS.		DWG R. VESTAL 23JUL2007		 Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME 24 WAY ARM	
		0 PLC ±.01 1 PLC ±.03 2 PLC ±0.10 3 PLC ±.05 4 PLC ±.01 ANGLES ±.5°		PRODUCT SPEC APPLICATION SPEC	
MATERIAL SEE CHART ABOVE		FINISH -		SIZE CAGE CODE DRAWING NO SEE NOTE 5 A 00779 C=1924670	
		WEIGHT -		RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE 3:1 SHEET 1 OF 3 REV D	

[illegible]AMP 4805 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-1924670-9](#)