



REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
B	REVISED PER ECM T-16511	91 JULY 30	Z. TEMAN
C	REVISED PER DCR# T-22756	4/20/99	M.HIGGY

PART No.	CONTACT	INTERFACE	COLOR CODE [⊗]
DK-621-X411R	—	THREADED	N/A
DK-621-X411R-44P	PIN	THREADED	
DK-621-X411R-45S	SOCKET	THREADED	
DK-621-X433R	—	A	RED
DK-621-X433R-44P	PIN	A	
DK-621-X433R-45S	SOCKET	A	
DK-621-X435R	—	B	WHITE
DK-621-X435R-44P	PIN	B	
DK-621-X435R-45S	SOCKET	B	
DK-621-X437R	—	C	GREEN
DK-621-X437R-44P	PIN	C	
DK-621-X437R-45S	SOCKET	C	
DK-621-X439R	—	D	N/A
DK-621-X439R-44P	PIN	D	
DK-621-X439R-45S	SOCKET	D	




PLUG - THREADED
CONNECTOR
D-621-0411R



PLUG - BAYONET
CONNECTOR
D-621-0433R/0439R



RIGHT ANGLE
ADAPTER TUBE
D-600-0601



STRAIN RELIEF

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.


DWG No. EXAMPLE X433R

-0433R .148 MAX. CABLE DIA ACCOMODATION
BRAID TERMINATOR D-600-0030

-1433R .180 MAX. CABLE DIA ACCOMODATION
BRAID TERMINATOR D-600-0056





COAXIAL
CONTACT
D-602-44
(D-602-45)



BRAID
TERMINATOR
D-600-00XX

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS. DECIMALS .XXX ± ——— [——— mm] .XX ± ——— [——— mm] ANGLES .X — ± ——— WEIGHT ——— lbs [——— g]	DRAWN J.B.K. 90 AUG 28		Raychem RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025				
	CHECKED			TITLE RIGHT ANGLE TRIAXIAL CONNECTOR PLUG CONNECTOR KITS (TRIAxIAL CABLE)			
	APPROVED			SIZE A	CODE IDENT. NO. 06090	DWG. NO. DK-621-X4XXR[-4XX]	REV C
	APPROVED		Z. TEMAN 90 AUG 28	DO NOT SCALE THIS DRAWING			
	CAD NAME T22756a.TIF		SHEET 1 OF 2				

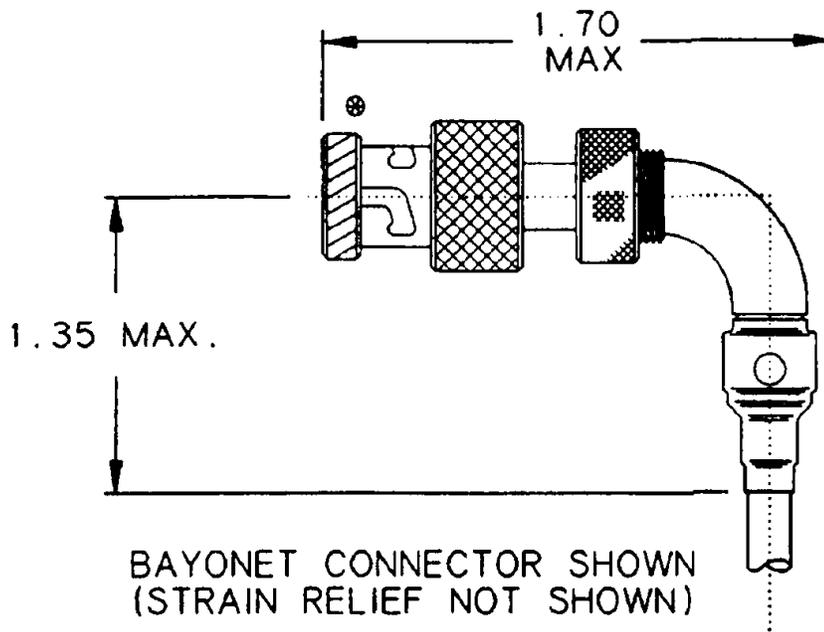

1.0 REFER TO THE FOLLOWING RAYCHEM SPECIFICATION CONTROL DRAWINGS (SCD) FOR INDIVIDUAL COMPONENT PERFORMANCE PARAMETERS, DIMENSIONS AND MATERIAL DETAIL:

D-621-0411R	CONNECTOR, TRIAXIAL, SUBMINIATURE THREADED COUPLED, FOR RIGHT ANGLE THREADED ADAPTER
D-621-0433R/0440R	CONNECTOR, TRIAXIAL, SUBMINIATURE BAYONET COUPLED, FOR RIGHT ANGLE THREADED ADAPTER
D-602-44	CONTACT, PIN, COAX
D-602-45	CONTACT, SOCKET, COAX
D-600-0030/0056	BRAID TERMINATOR
D-600-0019	STRAIN RELIEF
D-600-0601	RIGHT ANGLE ADAPTER TUBE

2.0 REFER TO RAYCHEM SPECIFICATION D-6025 FOR PERFORMANCE AND QUALIFICATION REQUIREMENTS.

2.1 PERFORMANCE IS DEPENDENT UPON CORRECT USAGE OF SUITABLE AEROBIC ADHESIVE UPON ADAPTER THREADS. (LOCTITE TYPE 242 IS A SUITABLE ADHESIVE.)

3.0 TERMINATION PROCEDURE: RAYCHEM ES 61249.

4.0 USAGE: CONNECTORS ASSEMBLED FROM THESE KITS CAN HAVE THE CABLE DRESSED IN ANY ORIENTATION AROUND THE AXIS OF THE CONNETOR. CABLE SHOULD BE SECURED IN DESIRED ORIENTATION.

**If this document is printed it becomes uncontrolled.
Check with the web for latest revision.**

CAD NAME: T22756b.TIF	DRAWN	J.B.K.	90 AUG 28	SIZE	CODE IDENT. NO.	DWG. NO.	REV
	ISSUED			A	06090	DK-621-X4XXR[4XX]	C
DO NOT SCALE THIS DRAWING						SHEET 2 OF 2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[DK-621-0411R-44P](#)