

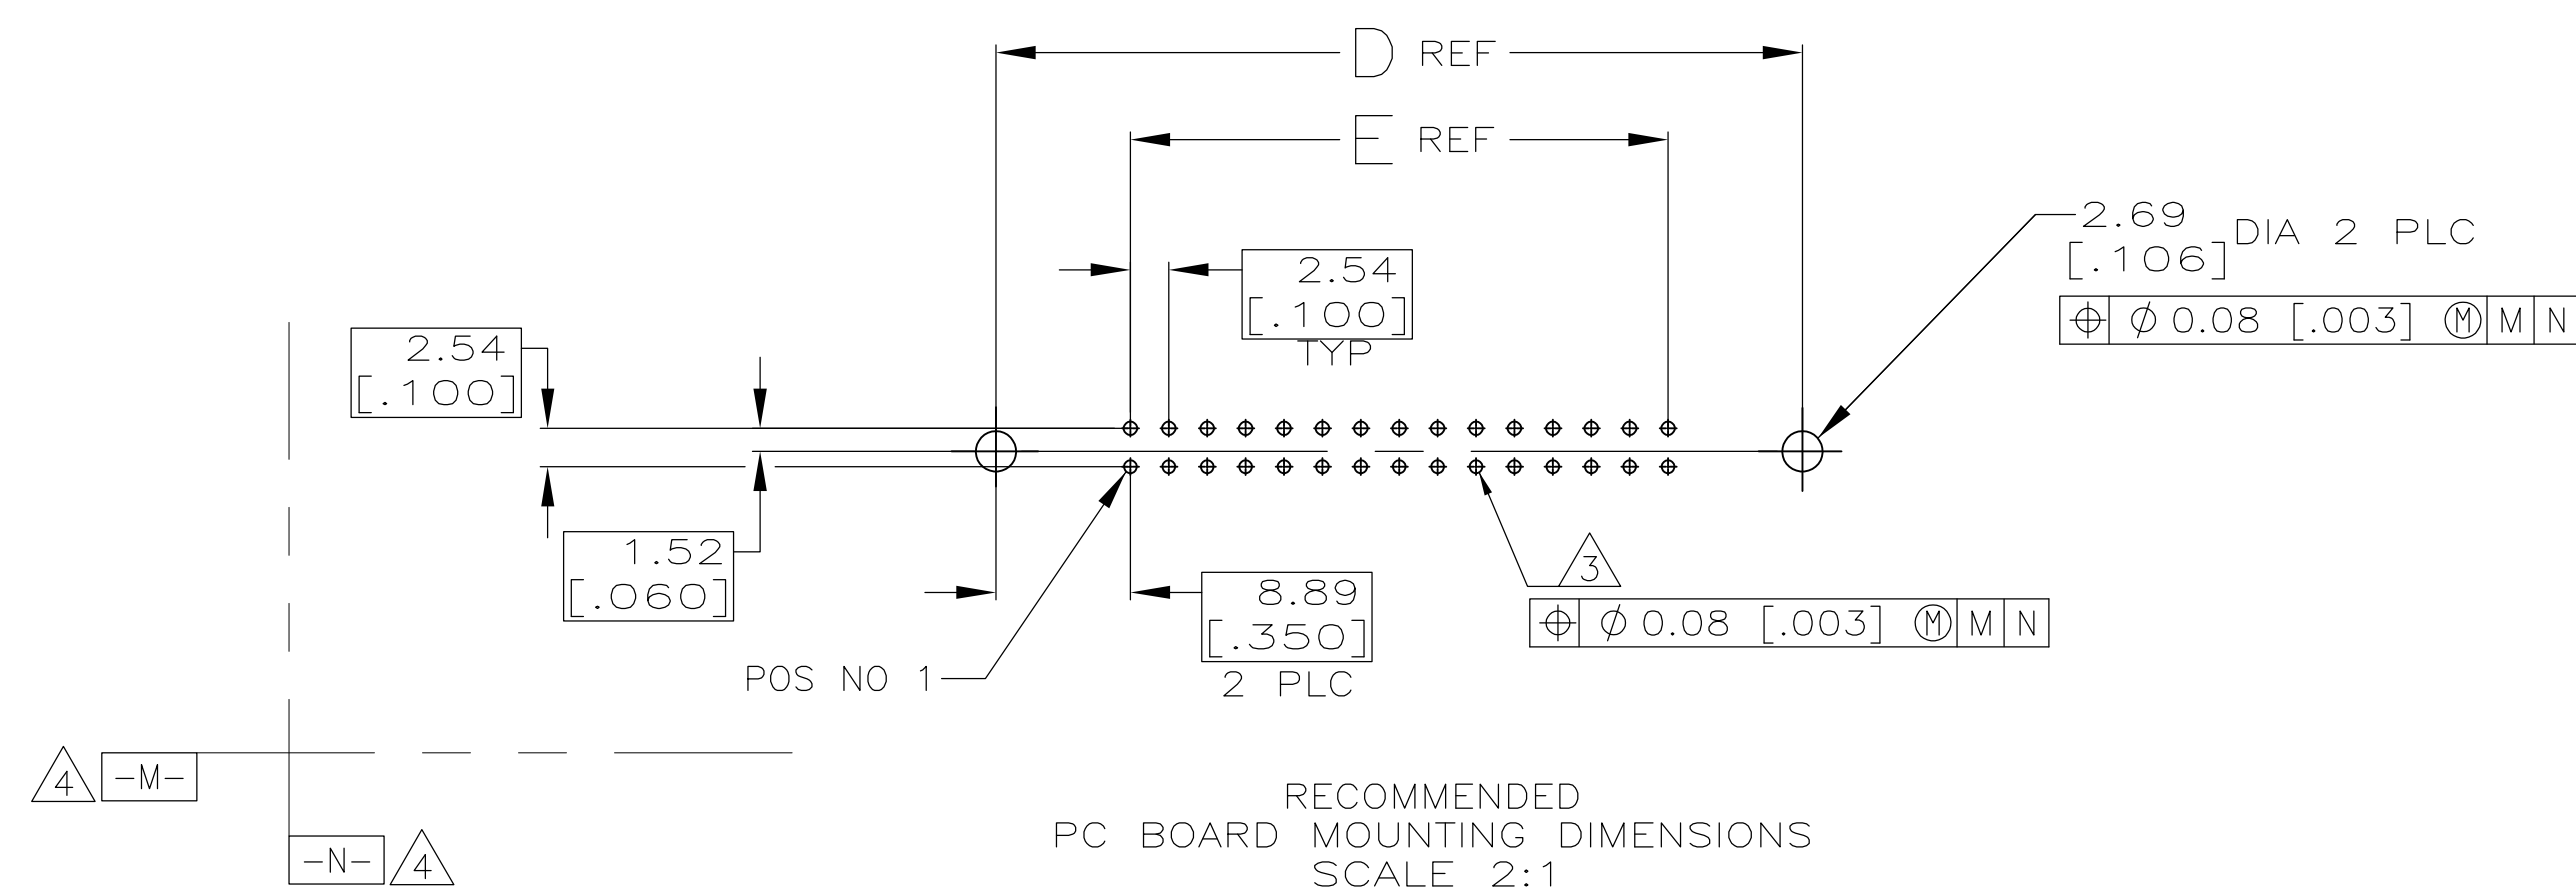
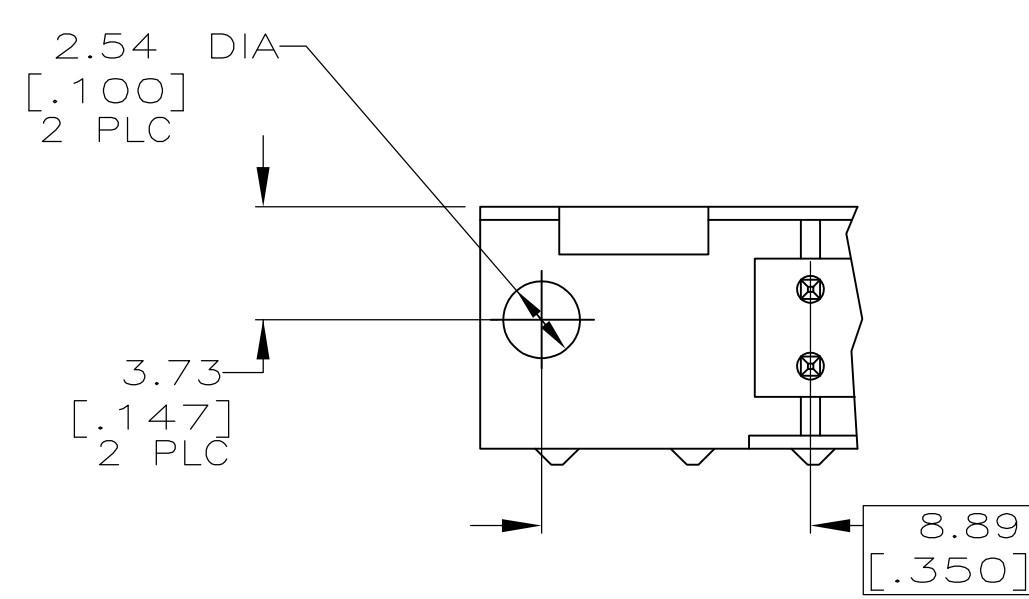


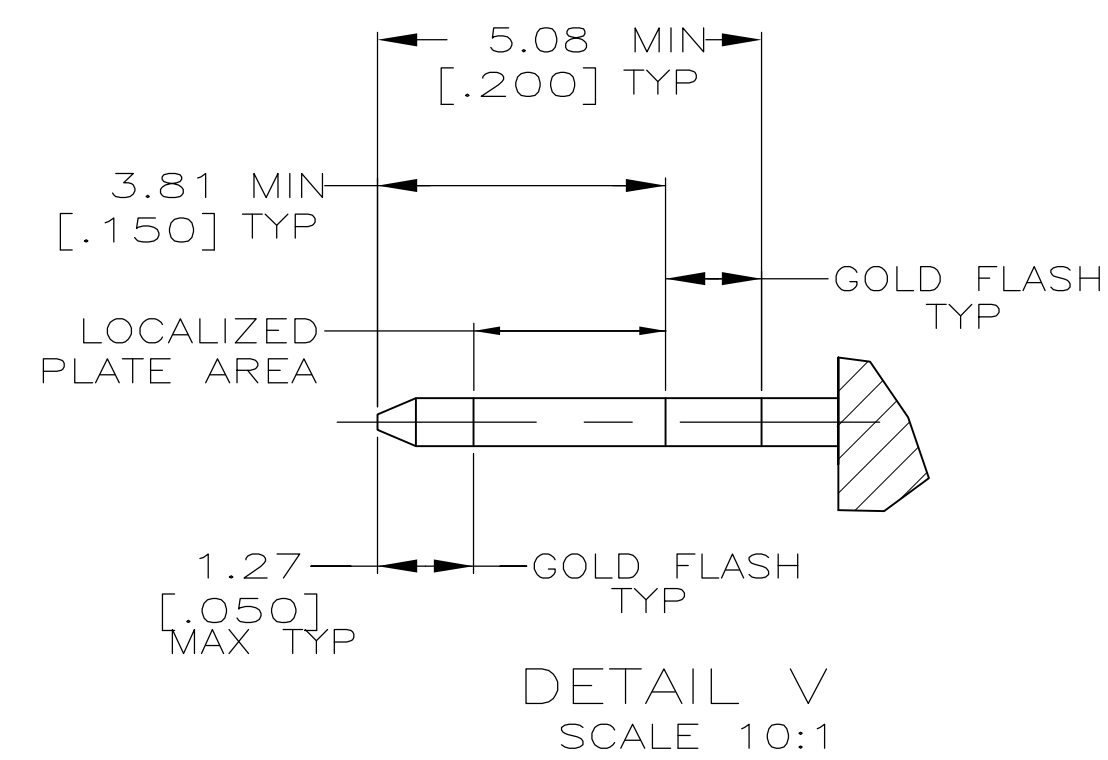


- 1 HOUSING: GLASS FILLED NYLON OR POLYESTER, UL94V-0 RATED, COLOR BLACK.  
POSTS: PHOSPHOR BRONZE.  
ALIMENT STRIP: ARMD PAPER.
- 2 POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE,  $0.76\mu\text{m}$ [.000030] MIN TOTAL ON THE LOCALIZED PLATE AREA,  $2.54\mu\text{m}$ [.000100] MIN TIN PLATE ON THE TAIL,  $1.27\mu\text{m}$ [.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.  
-OR-  
 $0.76\mu\text{m}$ [.000030] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA,  $2.54\mu\text{m}$ [.000100] MIN TIN PLATE ON THE TAIL,  $1.27\mu\text{m}$ [.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- 3 REFER TO APPLICATION SPECIFICATION 114-40020 FOR HOLE SIZE AND FINISH RECOMMENDATIONS.
- 4 DATUMS -M- & -N- TO BE ESTABLISHED BY CUSTOMER.
- 5 NO SLOT FOR SNAP-IN POLARIZER ON THIS END FOR 10 AND 14 POSITION HEADERS.
- 6 NO SLOT ON THIS END FOR 10 POSITION HEADERS.

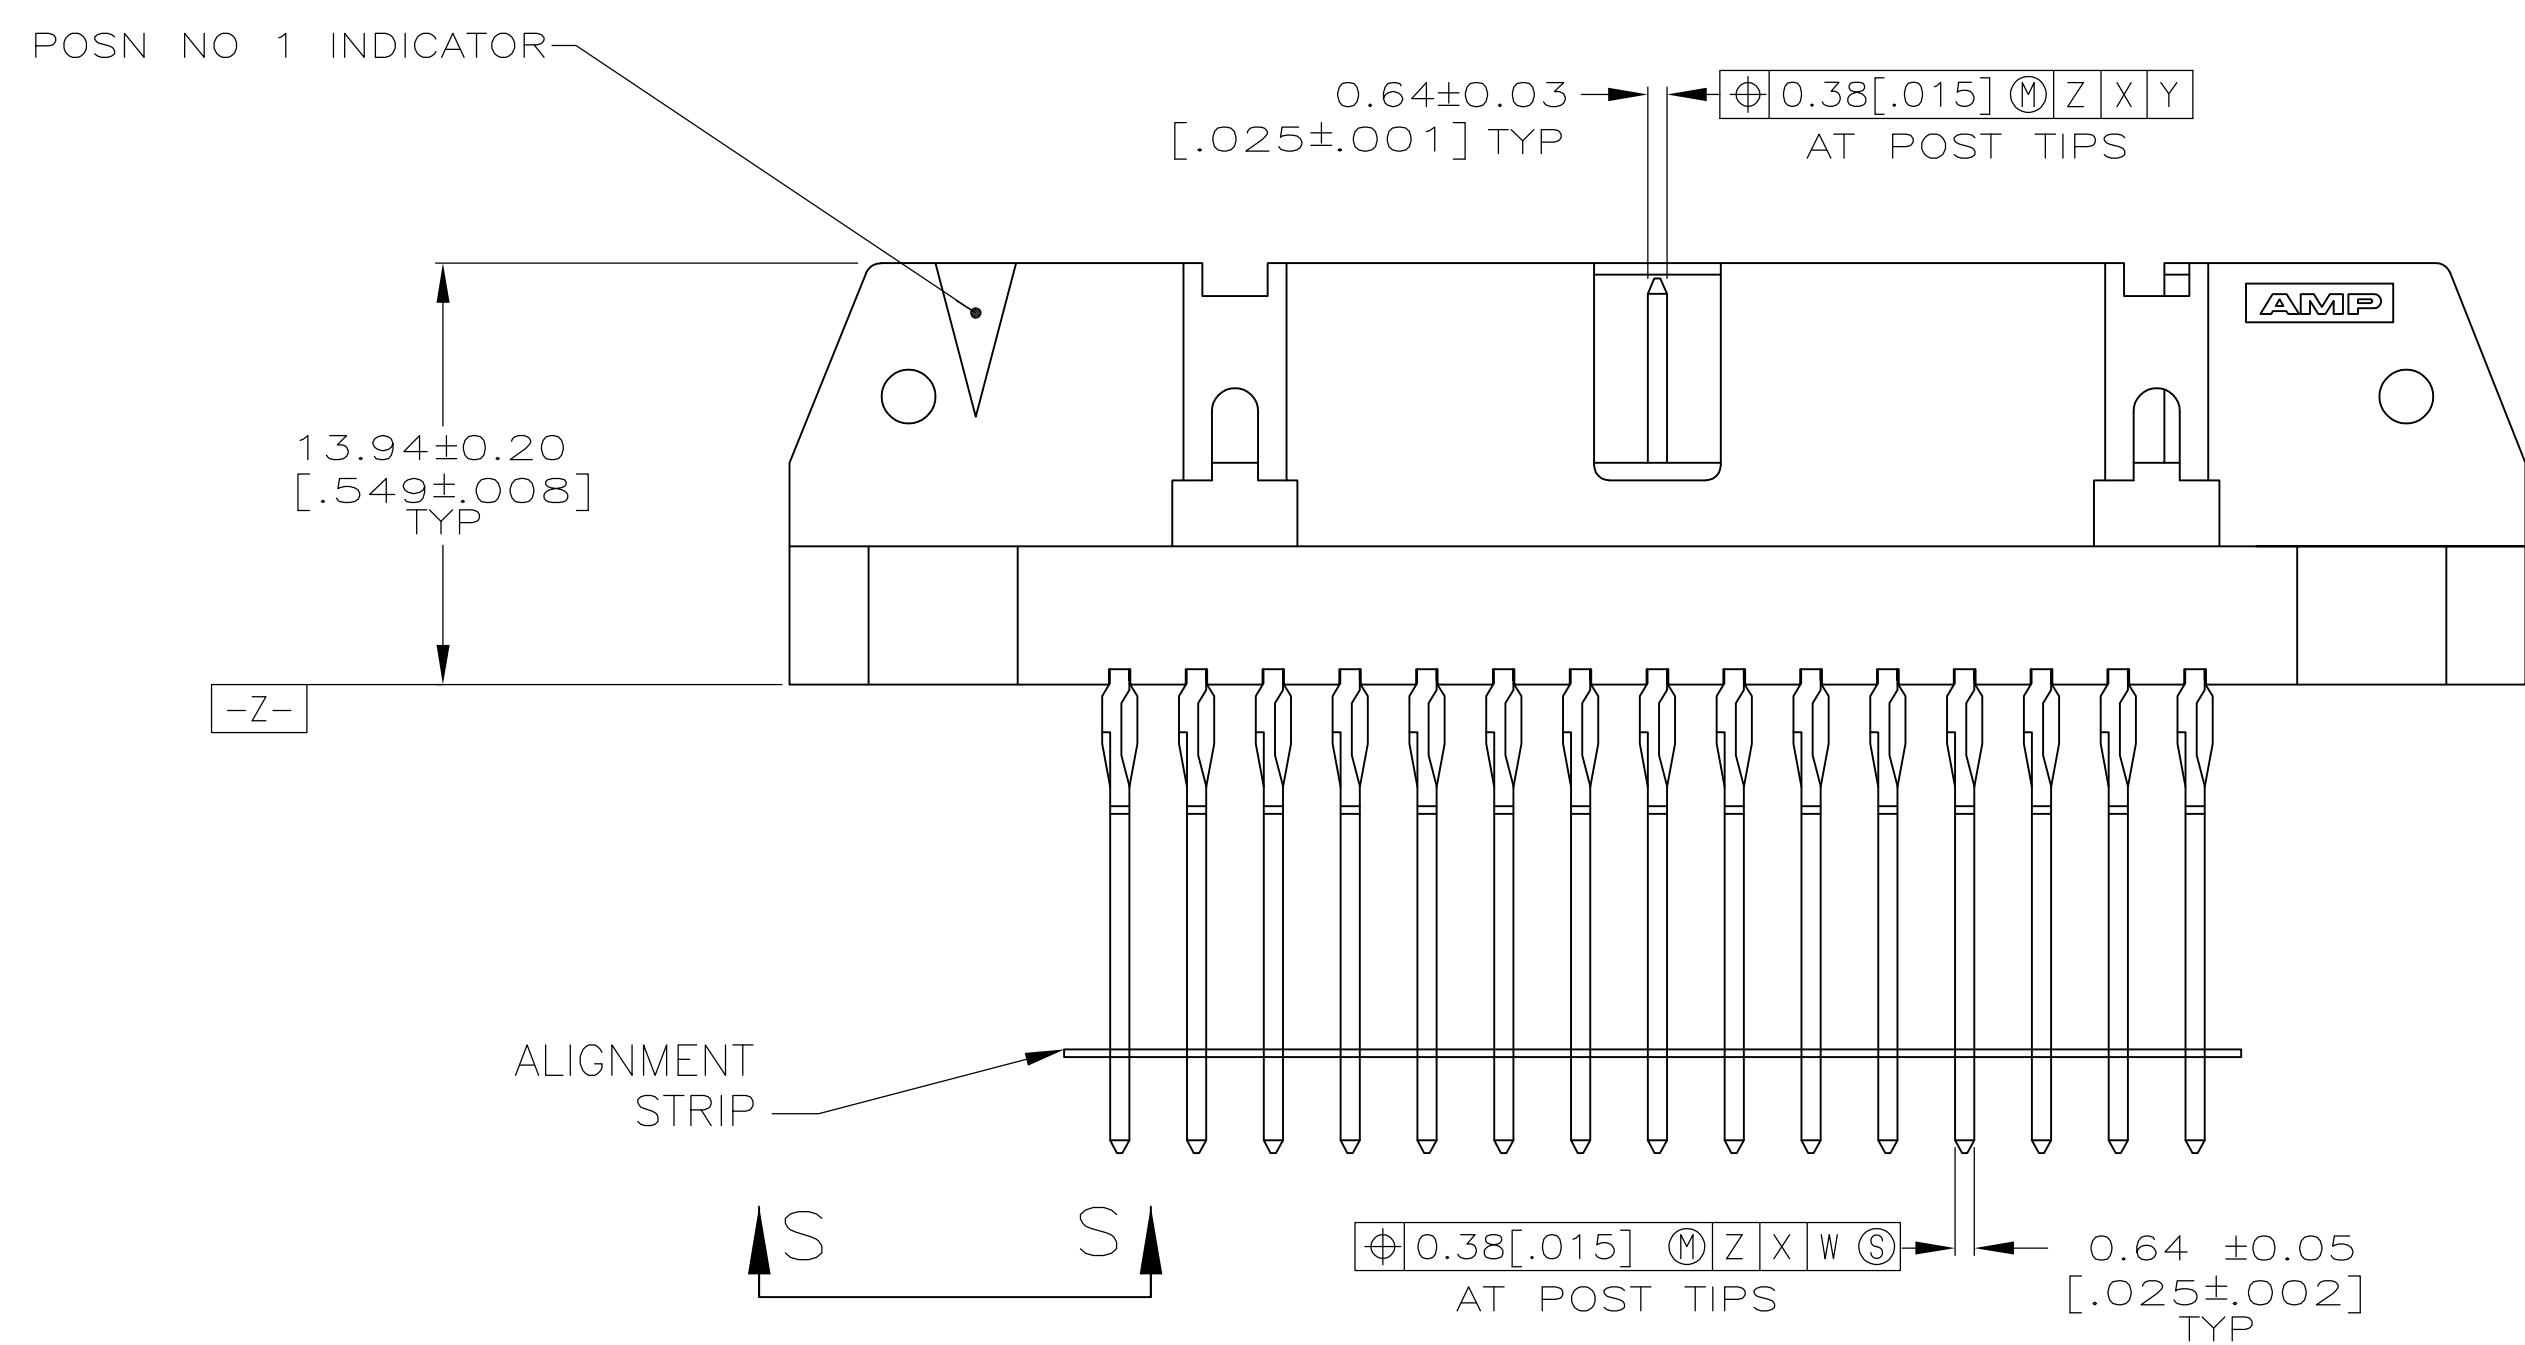

OBSOLETE	78.74 [3.100]	96.52 [3.800]	100.58 [3.960]	96.52 [3.800]	86.36 [3.400]	64	1-1658695-0
	73.66 [2.900]	91.44 [3.600]	95.50 [3.760]	91.44 [3.600]	81.28 [3.200]	60	1658695-9
	60.96 [2.400]	78.74 [3.100]	82.80 [3.260]	78.74 [3.100]	68.58 [2.700]	50	1658695-8
	48.26 [1.900]	66.04 [2.600]	70.10 [2.760]	66.04 [2.600]	55.88 [2.200]	40	1658695-7
	30.48 [1.200]	48.26 [1.900]	52.32 [2.060]	48.26 [1.900]	38.10 [1.500]	26	1658695-6
	22.86 [.900]	40.64 [1.600]	44.70 [1.760]	40.64 [1.600]	30.48 [1.200]	20	1658695-5
	17.78 [.700]	35.56 [1.400]	38.10 [1.560]	35.56 [1.400]	25.40 [1.000]	16	1658695-4
	15.24 [.600]	33.02 [1.300]	37.08 [1.460]	33.02 [1.300]	22.86 [.900]	14	1658695-3
	10.16 [.400]	27.94 [1.100]	32.00 [1.260]	27.94 [1.100]	17.78 [.700]	10	1658695-2
	40.64 [1.600]	58.42 [2.300]	62.48 [2.460]	58.42 [2.300]	48.26 [1.900]	34	1658695-1
	E	D	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG <b>R. SAMICK</b> 13JAN2004 CHK <b>S. BOLASH</b> 13JAN2004 APVD <b>M. WALMSLEY</b> 13JAN2004		<b>Tyco Electronics</b> Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH		NAME HEADER ASSY, UNIVERSAL, ACTION PIN, AMP-LATCH	
		PRODUCT SPEC <b>108-40019</b> APPLICATION SPEC <b>114-40020</b>		SIZE <b>A1</b>	
MATERIAL 		WEIGHT -		DRAWING NO <b>00779</b>	
		CUSTOMER DRAWING		SCALE <b>4:1</b>	
				SHEET <b>1</b> OF <b>1</b>	
				REV <b>F</b>	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1658695-4](#)