

VOICE OVER IP MAGNETICS

Broadband Transformers

S558-5500-13


- Support 10 Mbps and 100 Mbps VoIP applications
- Compliant with IEEE 802.3 standards
- Designed to meet 350mA balanced DC line current
- Operating temperature 0° to 70° C
- Minimum interwinding breakdown voltage of 1500 Vrms

ELECTRICAL SPECIFICATIONS AT 25° C

Turns Ratio ±3%		Insertion Loss dB min	Return Loss		Primary Inductance μH min	Leakage Inductance μH max	Interwinding Capacitance pF max	DCR Ω max			
TXIN : TXO	RXIN : RXO		100kHz to 100MHz	2MHz to 30MHz				60MHz to 80MHz	TXIN	TXO	RXIN
1CT : 1CT	1CT : 1CT	-0.5	-16	-10	400	0.4	20	0.5	0.5	0.5	0.5


SCHEMATIC

S558-5500-13

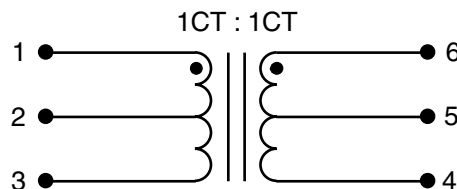

MECHANICAL

S558-5500-13

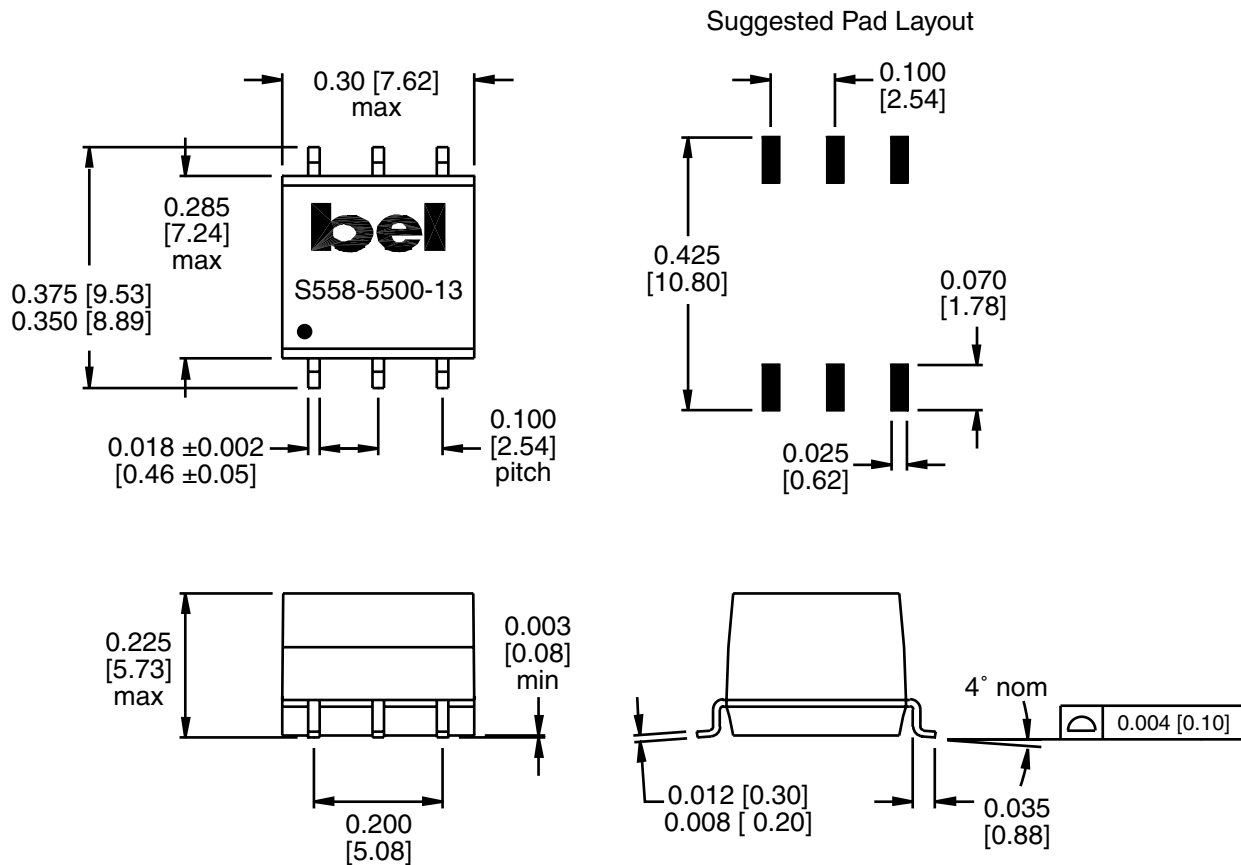

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel:

[S558-5500-12-F](#)