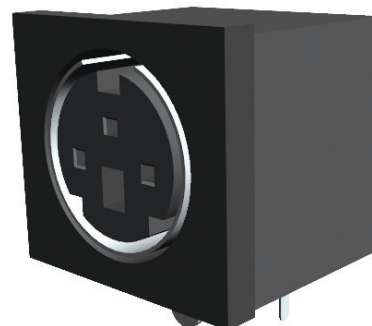
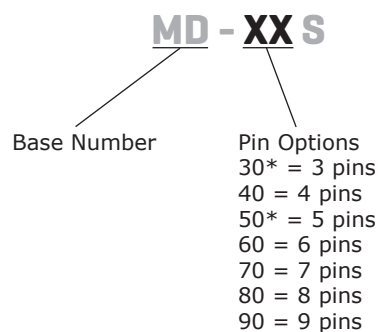


SERIES: MD-S | **DESCRIPTION:** MINI DIN CONNECTOR**FEATURES**

- PCB mount
- right angle
- non-shielded

**PART NUMBER KEY**

Notes: *Discontinued models MD-30S & MD-50S

SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated input voltage	3~8 pin models		30		Vdc
	9 pin model		12		Vdc
rated input current	3~8 pin models			1	A
	9 pin model			2	A
contact resistance				30	mΩ
insulation resistance		100			MΩ
voltage withstand	3~8 pin models for 1 minute			500	Vac
	9 pin model for 1 minute			250	Vac
insertion force	3~8 pin models			45	N
	9 pin model			35	N
withdrawal force	3~8 pin models	7			N
	9 pin model	10			N
operating temperature		-25		50	°C
life	3~8 pin models		500		cycles
	9 pin model		5,000		cycles
flammability rating	UL94V-0				
RoHS	yes				

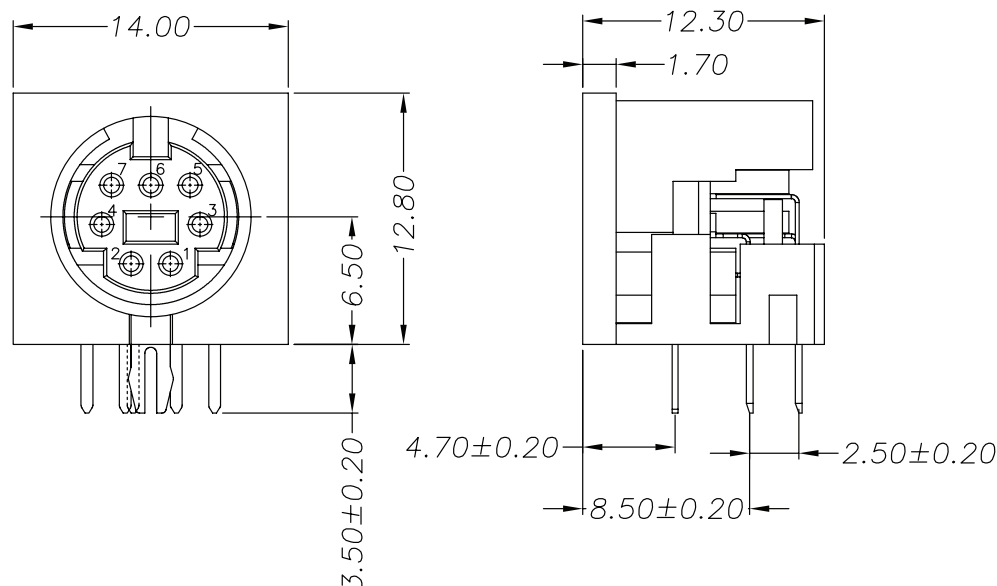


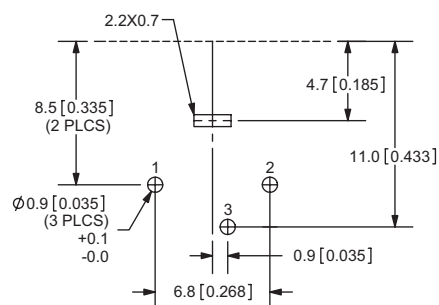

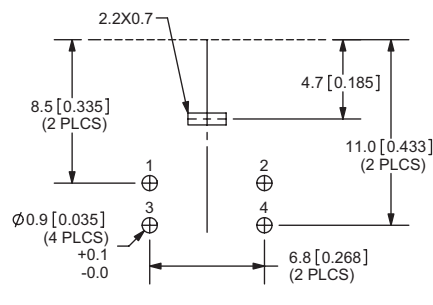
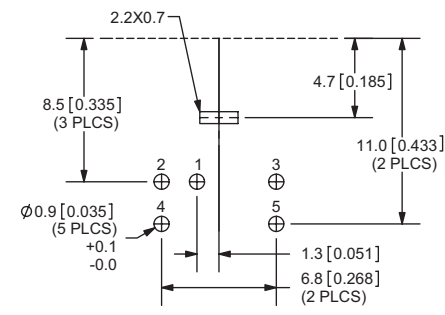
SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	for 1~3 seconds	230		250	°C

MECHANICAL DRAWING (MD-30S, MD-40S, MD-50S)

units: mm
 tolerance:
 X.X ± 0.38 mm
 X.XX ± 0.25 mm
 X.XXX ± 0.13 mm

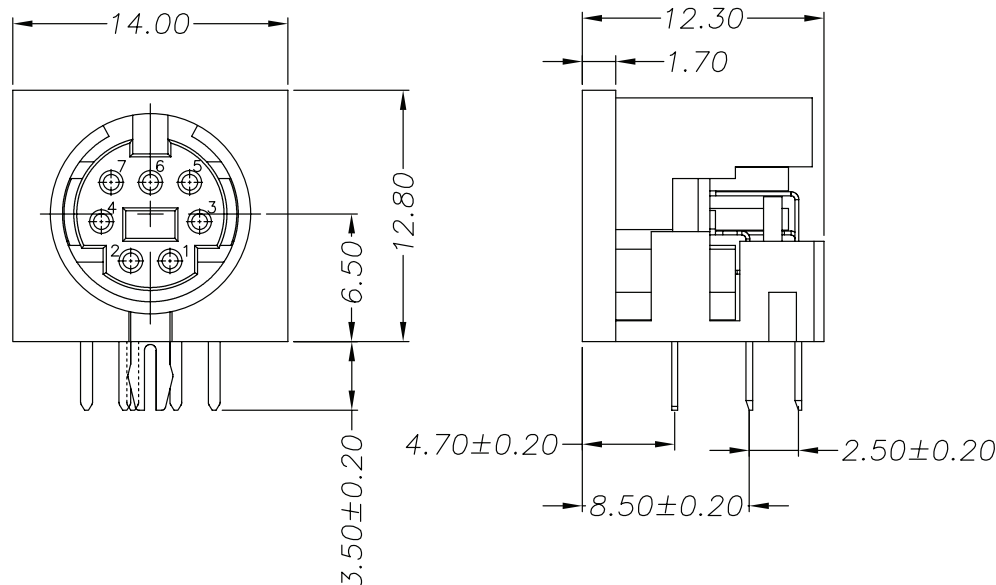
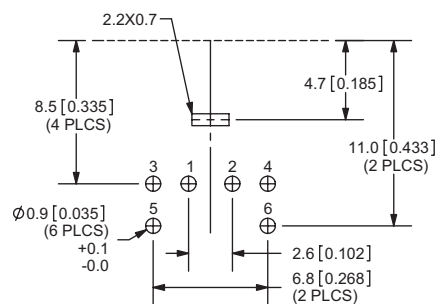

	MATERIAL	PLATING
body	PBT+30%GF (UL94V-0)	
pins	brass	tin
shield	brass	nickel

**MD-30S****MD-40S****MD-50S**Recommended PCB Layout
Top ViewRecommended PCB Layout
Top ViewRecommended PCB Layout
Top View

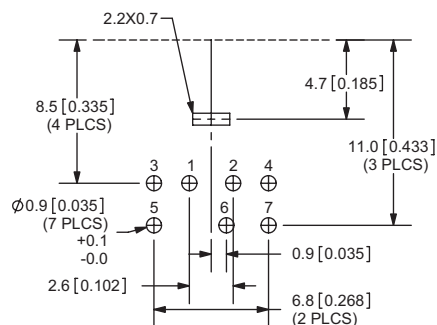

MECHANICAL DRAWING (MD-60S, MD-70S, MD-80S)

units: mm
 tolerance:
 X.X ± 0.38 mm
 X.XX ± 0.25 mm
 X.XXX ± 0.13 mm

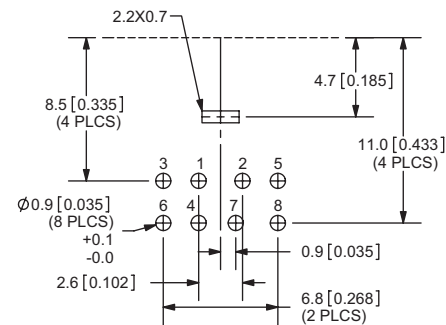

	MATERIAL	PLATING
body	PBT+30%GF (UL94V-0)	
pins	brass	tin
shield	brass	nickel

**MD-60S**

Recommended PCB Layout
Top View

MD-70S

Recommended PCB Layout
Top View

MD-80S

Recommended PCB Layout
Top View

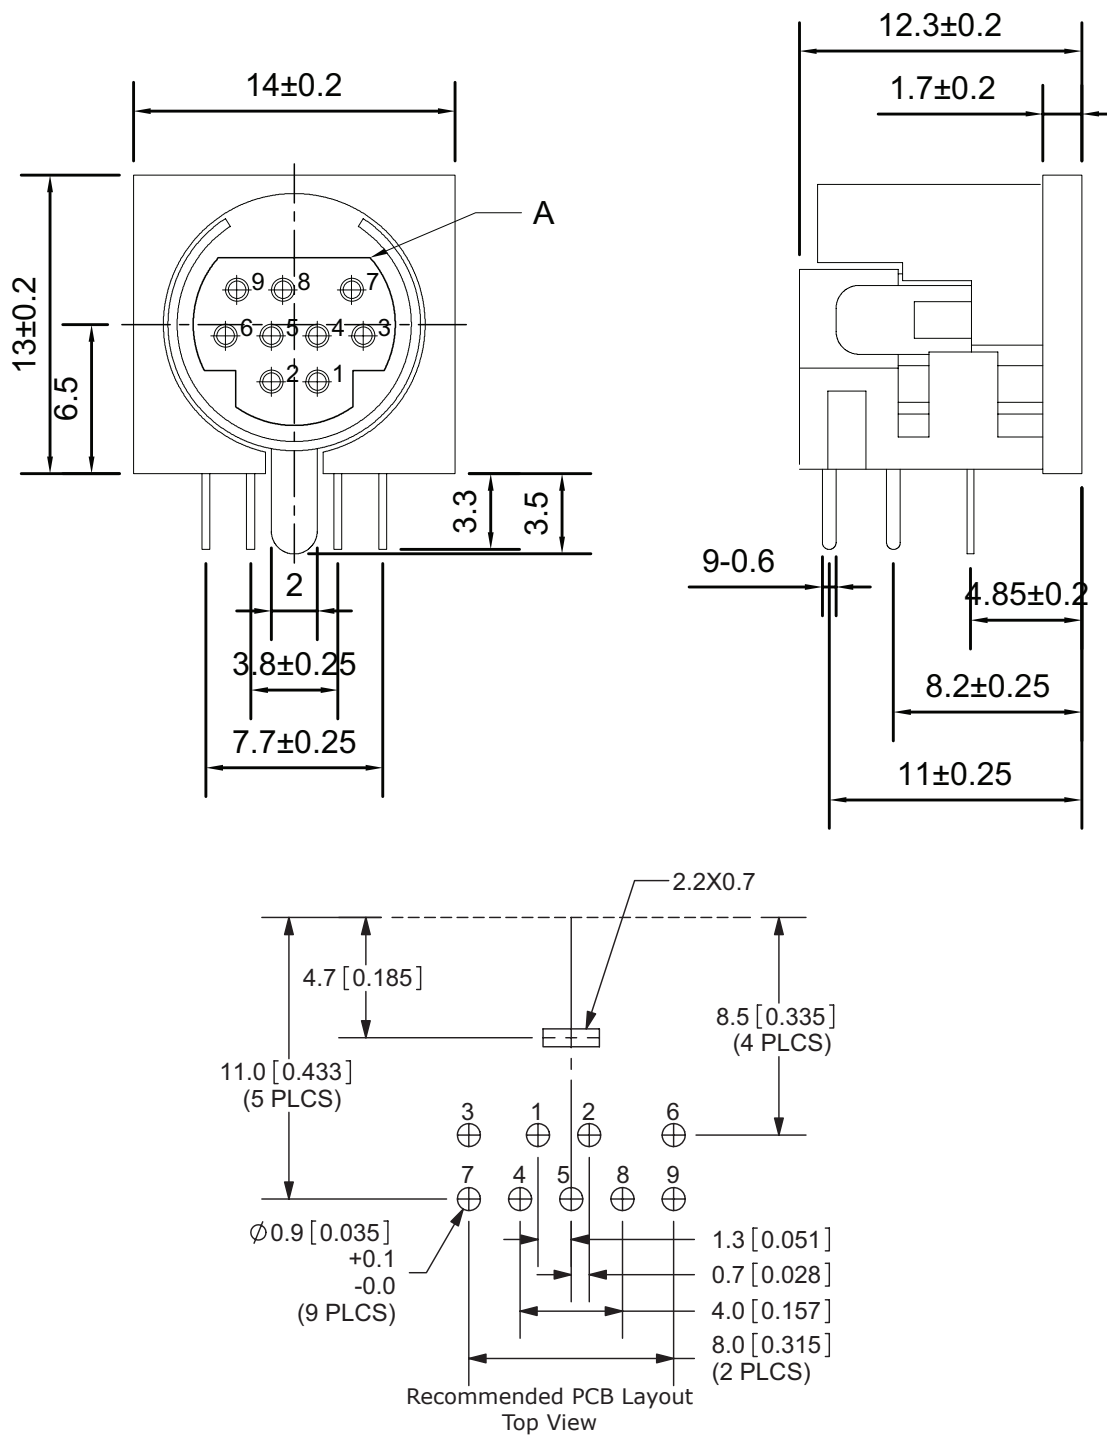
MECHANICAL DRAWING (MD-90S)

units: mm

tolerance:

X.X ± 0.35 mmX.XX ± 0.25 mmX.XXX ± 0.15 mm

	MATERIAL	PLATING
body	PBT (UL94V-0)	
cover	PBT (UL94V-0)	
ground	brass	copper/tin
pins	brass	copper/tin



REVISION HISTORY

rev.	description	date
1.0	initial release	02/23/2006
1.01	new template applied	02/16/2012
1.02	housing updates	03/29/2012
1.03	updated datasheet	08/25/2017
1.04	discontinued models MD-30S and MD-50S, brand update	10/08/2019
1.05	updated housing	12/12/2019

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CUI Inc.:

[MD-70S](#) [MD-90S](#) [MD-80S](#) [MD-40S](#) [MD-60S](#) [MD-50S](#) [MD-30S](#)