

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:


PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	1.94 ohms ±10%
D.C. RESISTANCE	4-3 @20°C	1.94 ohms ±10%
INDUCTANCE	1-2 10kHz, 50mVAC, Ls	42.0 +60%/-30% μ H
INDUCTANCE	4-3 10kHz, 50mVAC, Ls	42.0 +60%/-30% μ H
SATURATION CURRENT	tie(2+3), roll off 20% from initial	1.5A
LEAKAGE INDUCTANCE	tie(2+3), 10kHz, 50mVAC, Ls	1.0mH min.
DIELECTRIC	1-4 2514VAC, 1 second	2011VAC, 1 minute
DIELECTRIC	1-CORE tie(1+4), 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(1-2):(4-3)	1:1, ±2%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to meet UL Recognized Insulation System M7-130(B), E106391.

- ⑥C Current Rating: 0.5A
- ⑥C Designed to comply with UL 1993 for 347VACrms or VDC.
- ⑥C Designed to comply with UL 840 for 347VACrms or VDC for Overvoltage Category II and Pollution Degree II.

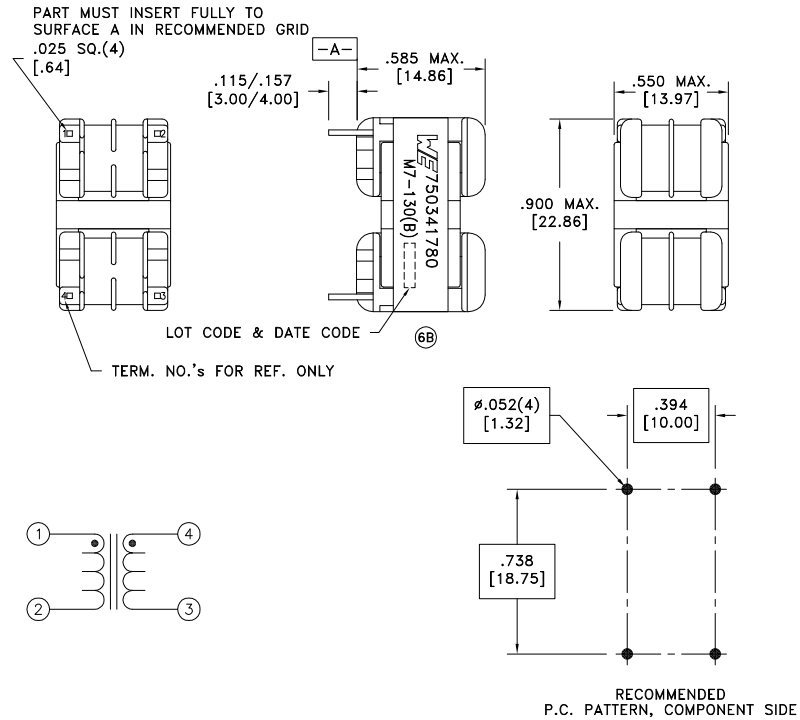


Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.


REV.	DATE	Packaging Specifications	 CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Decimals: $\pm .005$ [.13] Fractions: $\pm 1/64$ Footprint: $\pm .001$ [.03]	DRAWING TITLE	PART NO.
		Method: Tray PKG-0822		CMC		750341780
6C	11/15	www.we-online.com/midcom				
6B	12/14					
6A	5/13	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750341780	SPECIFICATION SHEET 1 OF 2



INFORMATION SHEET

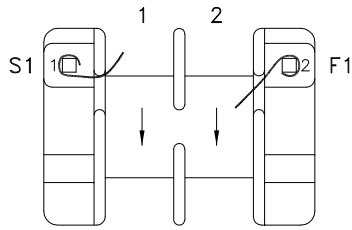

COIL 1

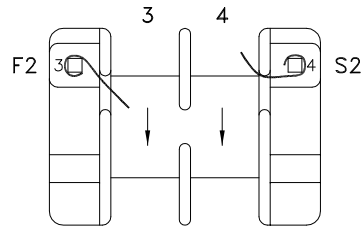

COIL 2

(6B)

WINDING INFORMATION

ITEM	COIL 1	COIL 2	
WINDING SEQUENCE	1	2	
WIRE WIND DIRECTION	CCW	CCW	
WINDING STYLE	PRECISION	PRECISION	
WIRE TYPE	31H	31H	
TURNS (+/-)	130	130	
BOBBIN SECTION	1&2	3&4	
LAYERS	—	—	
WINDING WIDTH (mm)	3.12x2	3.12x2	
INSULATION TAPE (LAYERS)	—	—	
D.C. RESISTANCE (OHMS @25°C)	2.134 max.	2.134 max.	
Q (MIN.)	—	—	
VuSEC (MAX.) @100°C	—	—	
Vpeak, COIL*	—	—	
Isat (MIN.) @100°C**	—	—	

(6B)

*Please refer to Guidelines for the Usage of Components, Document No 171HM0002-1.

**DC bias applied to cause 20% drop from initial inductance.

BILL OF MATERIAL

PART	DESCRIPTION	SUPPLIER	UL FILE NUMBER
BOBBIN	EE16.5, TH NYLON 70G33L	PIN SHINE INDUSTRIAL	E41938(M)
WIRE	31 AWG HEAVY POLY, 155°C MW80C	ELEKTRISOLA	E143312 E63382
TAPE	#1351-1	3M	E17385
CORE	EE16.5-1 FERRITE (.64mm Ref. GAP) BSAT, MIN. @100°C = 300mT (Ae MIN. = 35.94mm ²)	ACME, A05 TDG, TL5	—

MECHANICAL

PART	DESCRIPTION
PACKAGING	TRAY QTY: 63, BOX QTY: 441
WEIGHT	10.68g/piece
TERMINAL SIZE	0.025" ±.005 [0.64mm ±.127] sq. MIN. DRILL HOLE DIAMETER 1.32mm
PULL FORCE	2.0kg min.
COPLANARITY	n/a (thru hole device)

STORAGE TEMPERATURE RANGE: -40°C to +125°C.

WURTH ELECTRONICS
MIDCOM INC.

PART NO.

750341780

REV.

6C

SPECIFICATION SHEET 2 OF 2

PART#
750341780

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[750341780](#)