
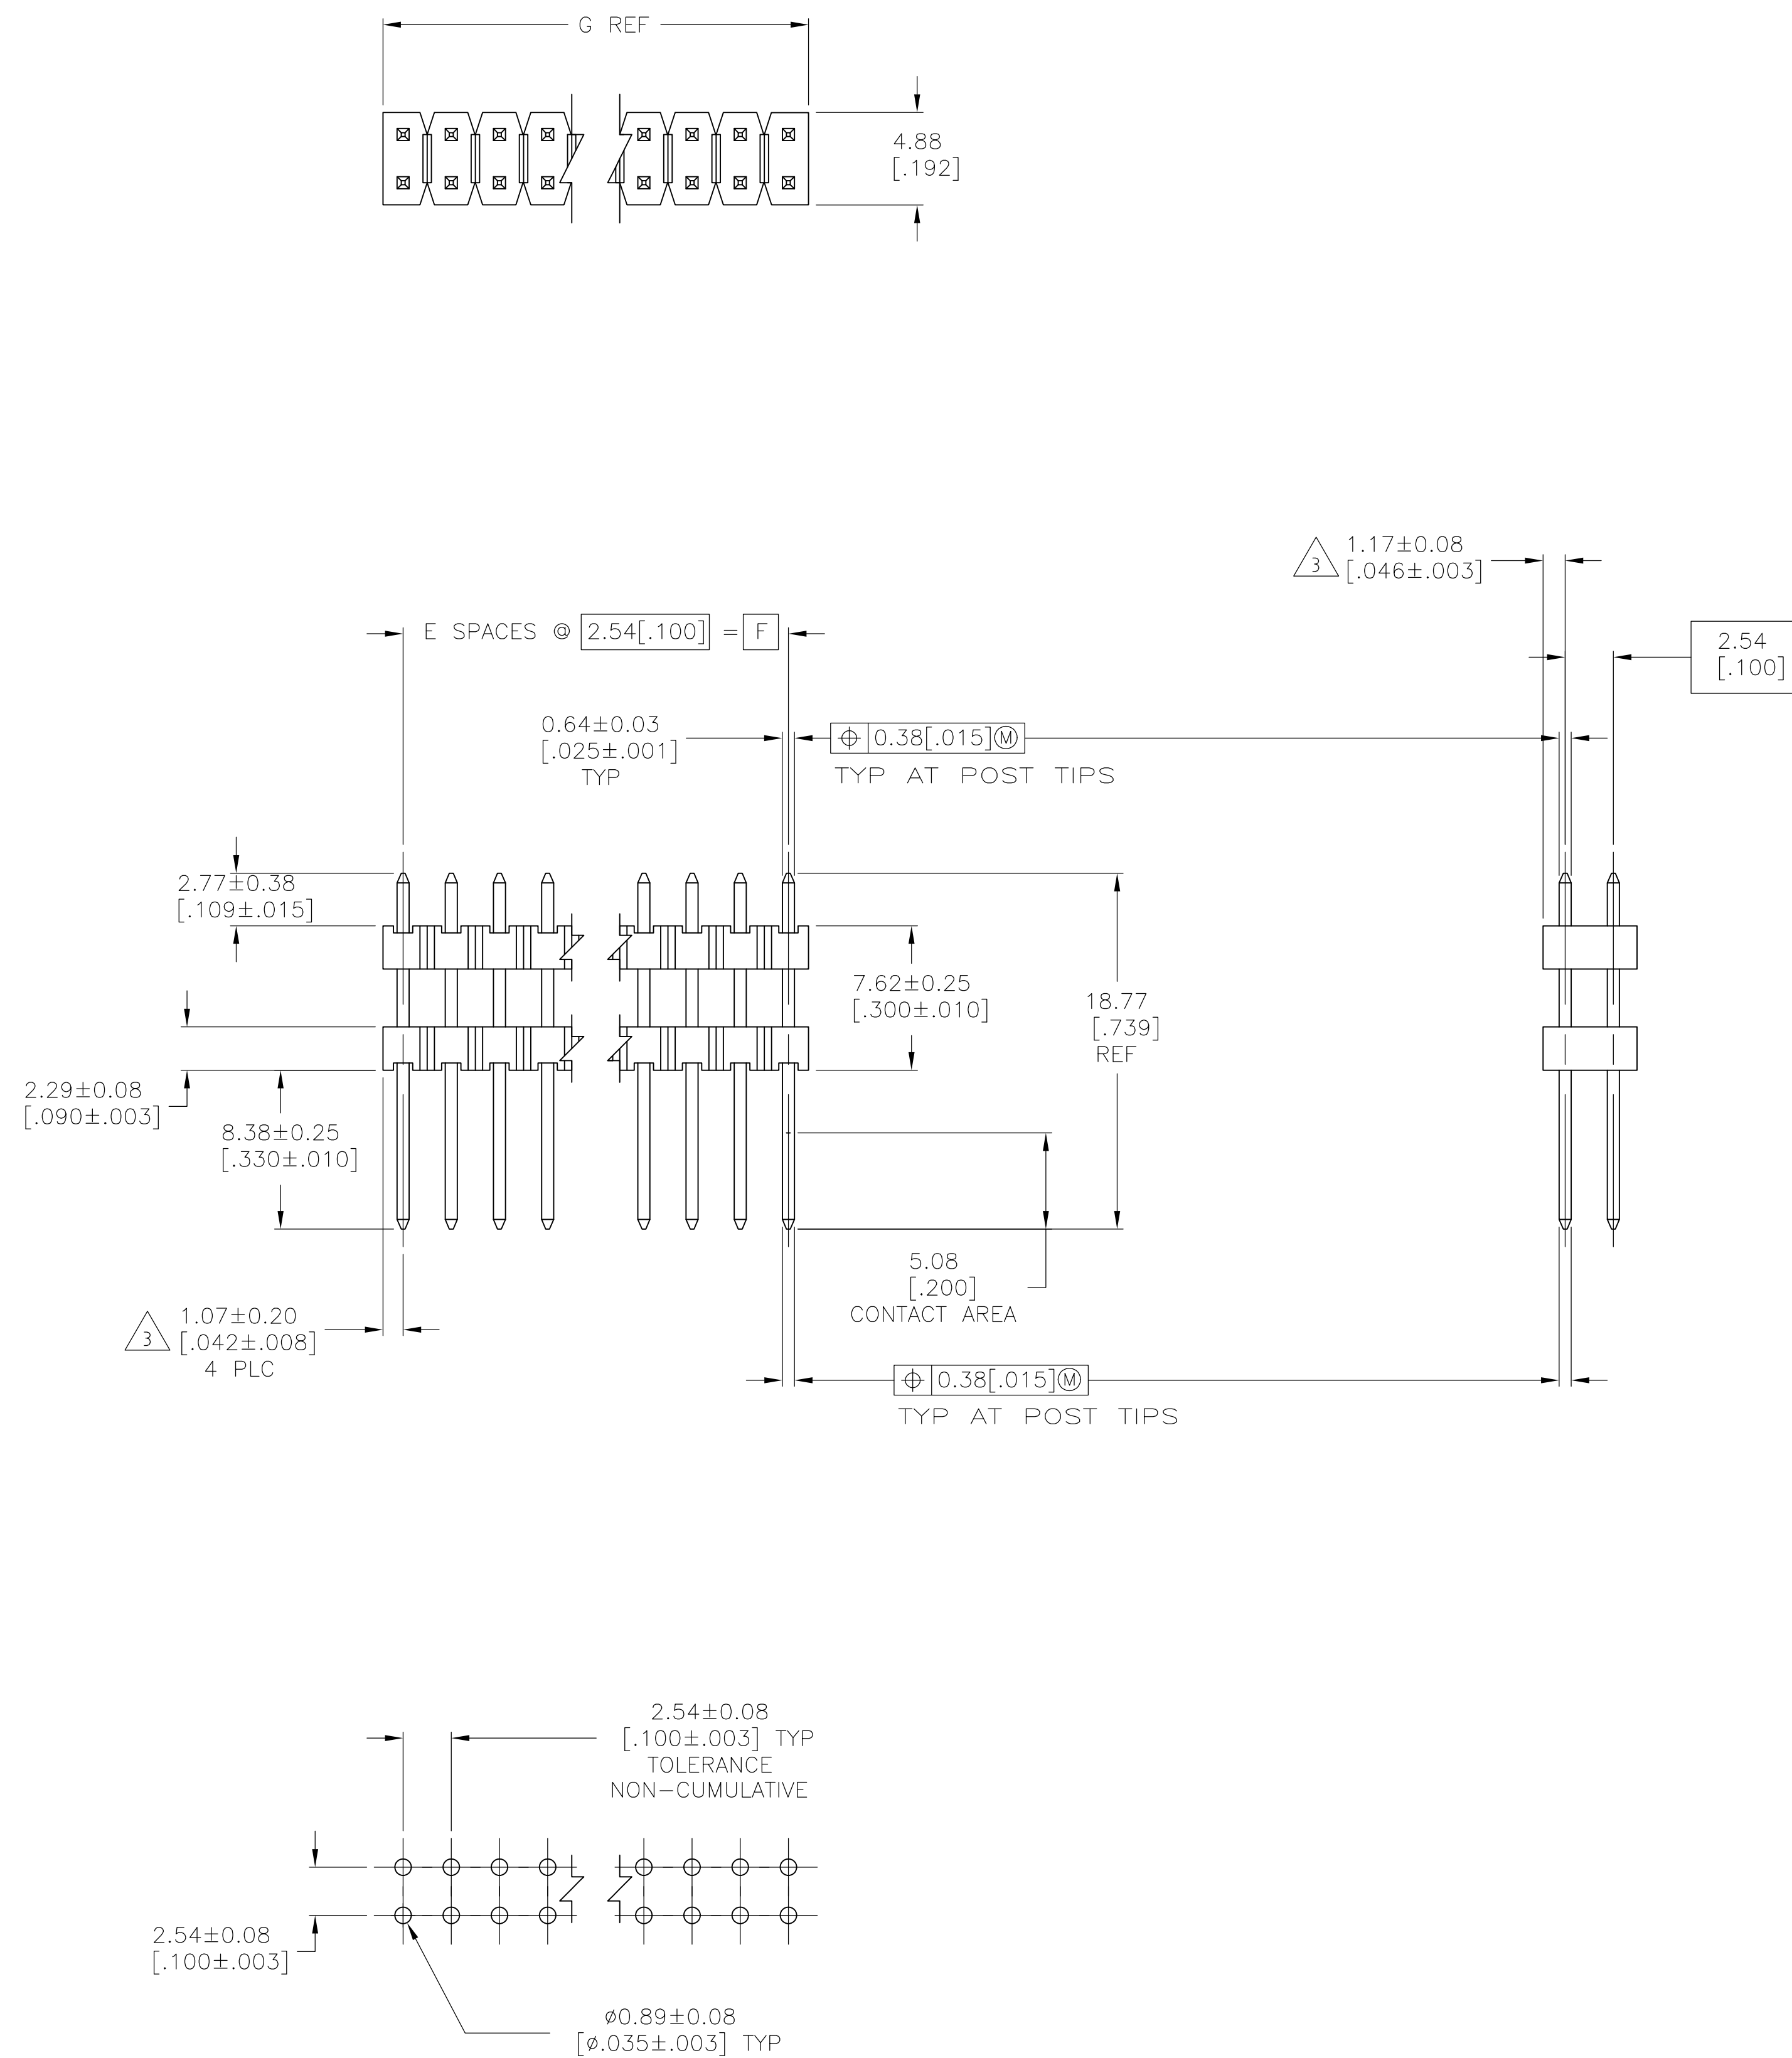




RECOMMENDED HOLE LAYOUT

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER
IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
CONTACT: COPPER ALLOY
- 5 FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL,
0.00127 [.000050] NICKEL ENTIRE POST.
- 6 FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL,
0.00127 [.000050] NICKEL ENTIRE POST.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. BROWN 190CT2006 CHK J. GEFORD 190CT2006		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± 0.5[.02] 2 PLC ± 0.13[.005] 3 PLC ± — 4 PLC ± — ANGLES ± — FINISH		NAME APVD J. GEFORD 190CT2006 PRODUCT SPEC — APPLICATION SPEC —	
		SIZE A1		CAGE CODE 00779	
MATERIAL 		DRAWING NO C-146490		RESTRICTED TO —	
SEE TABLE		WEIGHT —		SCALE 4:1	
CUSTOMER DRAWING		SHEET 1 OF 2		REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-146490-5](#)