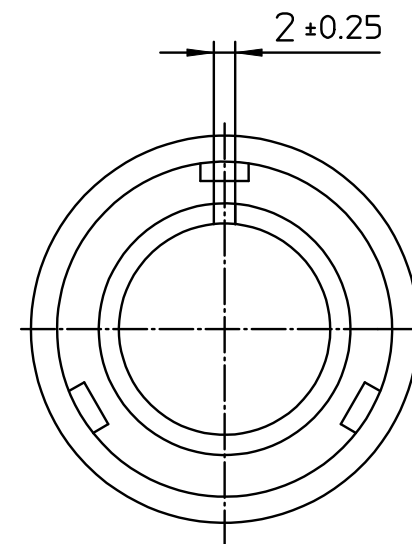


| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 29.2              |
| B   | 10.6              |
| C   | 22                |
| D   | 55                |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN     |
| 3   | DICKTKÖRPER / GROMMET                   |
| 5   | KONTAKTSTIFT/ CONTACT PIN               |
| 7   | ZYLINDERGHÄUSE / BARREL                 |
| 9   | ÜBERWURFMUTTER / COUPLING NUT           |
| 10  | DICHTRING FRONT / FRONT SEALING RING    |
| 11  | SCHIRMKRANZ/SHIELDING BRAID             |
| 16  | ENDGEHÄUSE GESCHIRMT / ENDBELL SHIELDED |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

#### Material Specification:

|                     |                                               |
|---------------------|-----------------------------------------------|
| Shell Material:     | Aluminium alloy                               |
| Shell Plating:      | Olive drab chromate over cadmium (conductive) |
| Insulator Material: | CR-Elastomere                                 |
| Contact Material:   | Copper alloy                                  |
| Contact Plating:    | Gold 0,5 µm                                   |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description **CA3106E14S-2P-B-15-A176**  
Plug, straight shielded  
Shielded with endbell for shielded braids & heat shrinkable boots  
AWG Crimp / Pin / Layout: 14S-2

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon

page 1/1  
revision 1653 4. Feb 19