
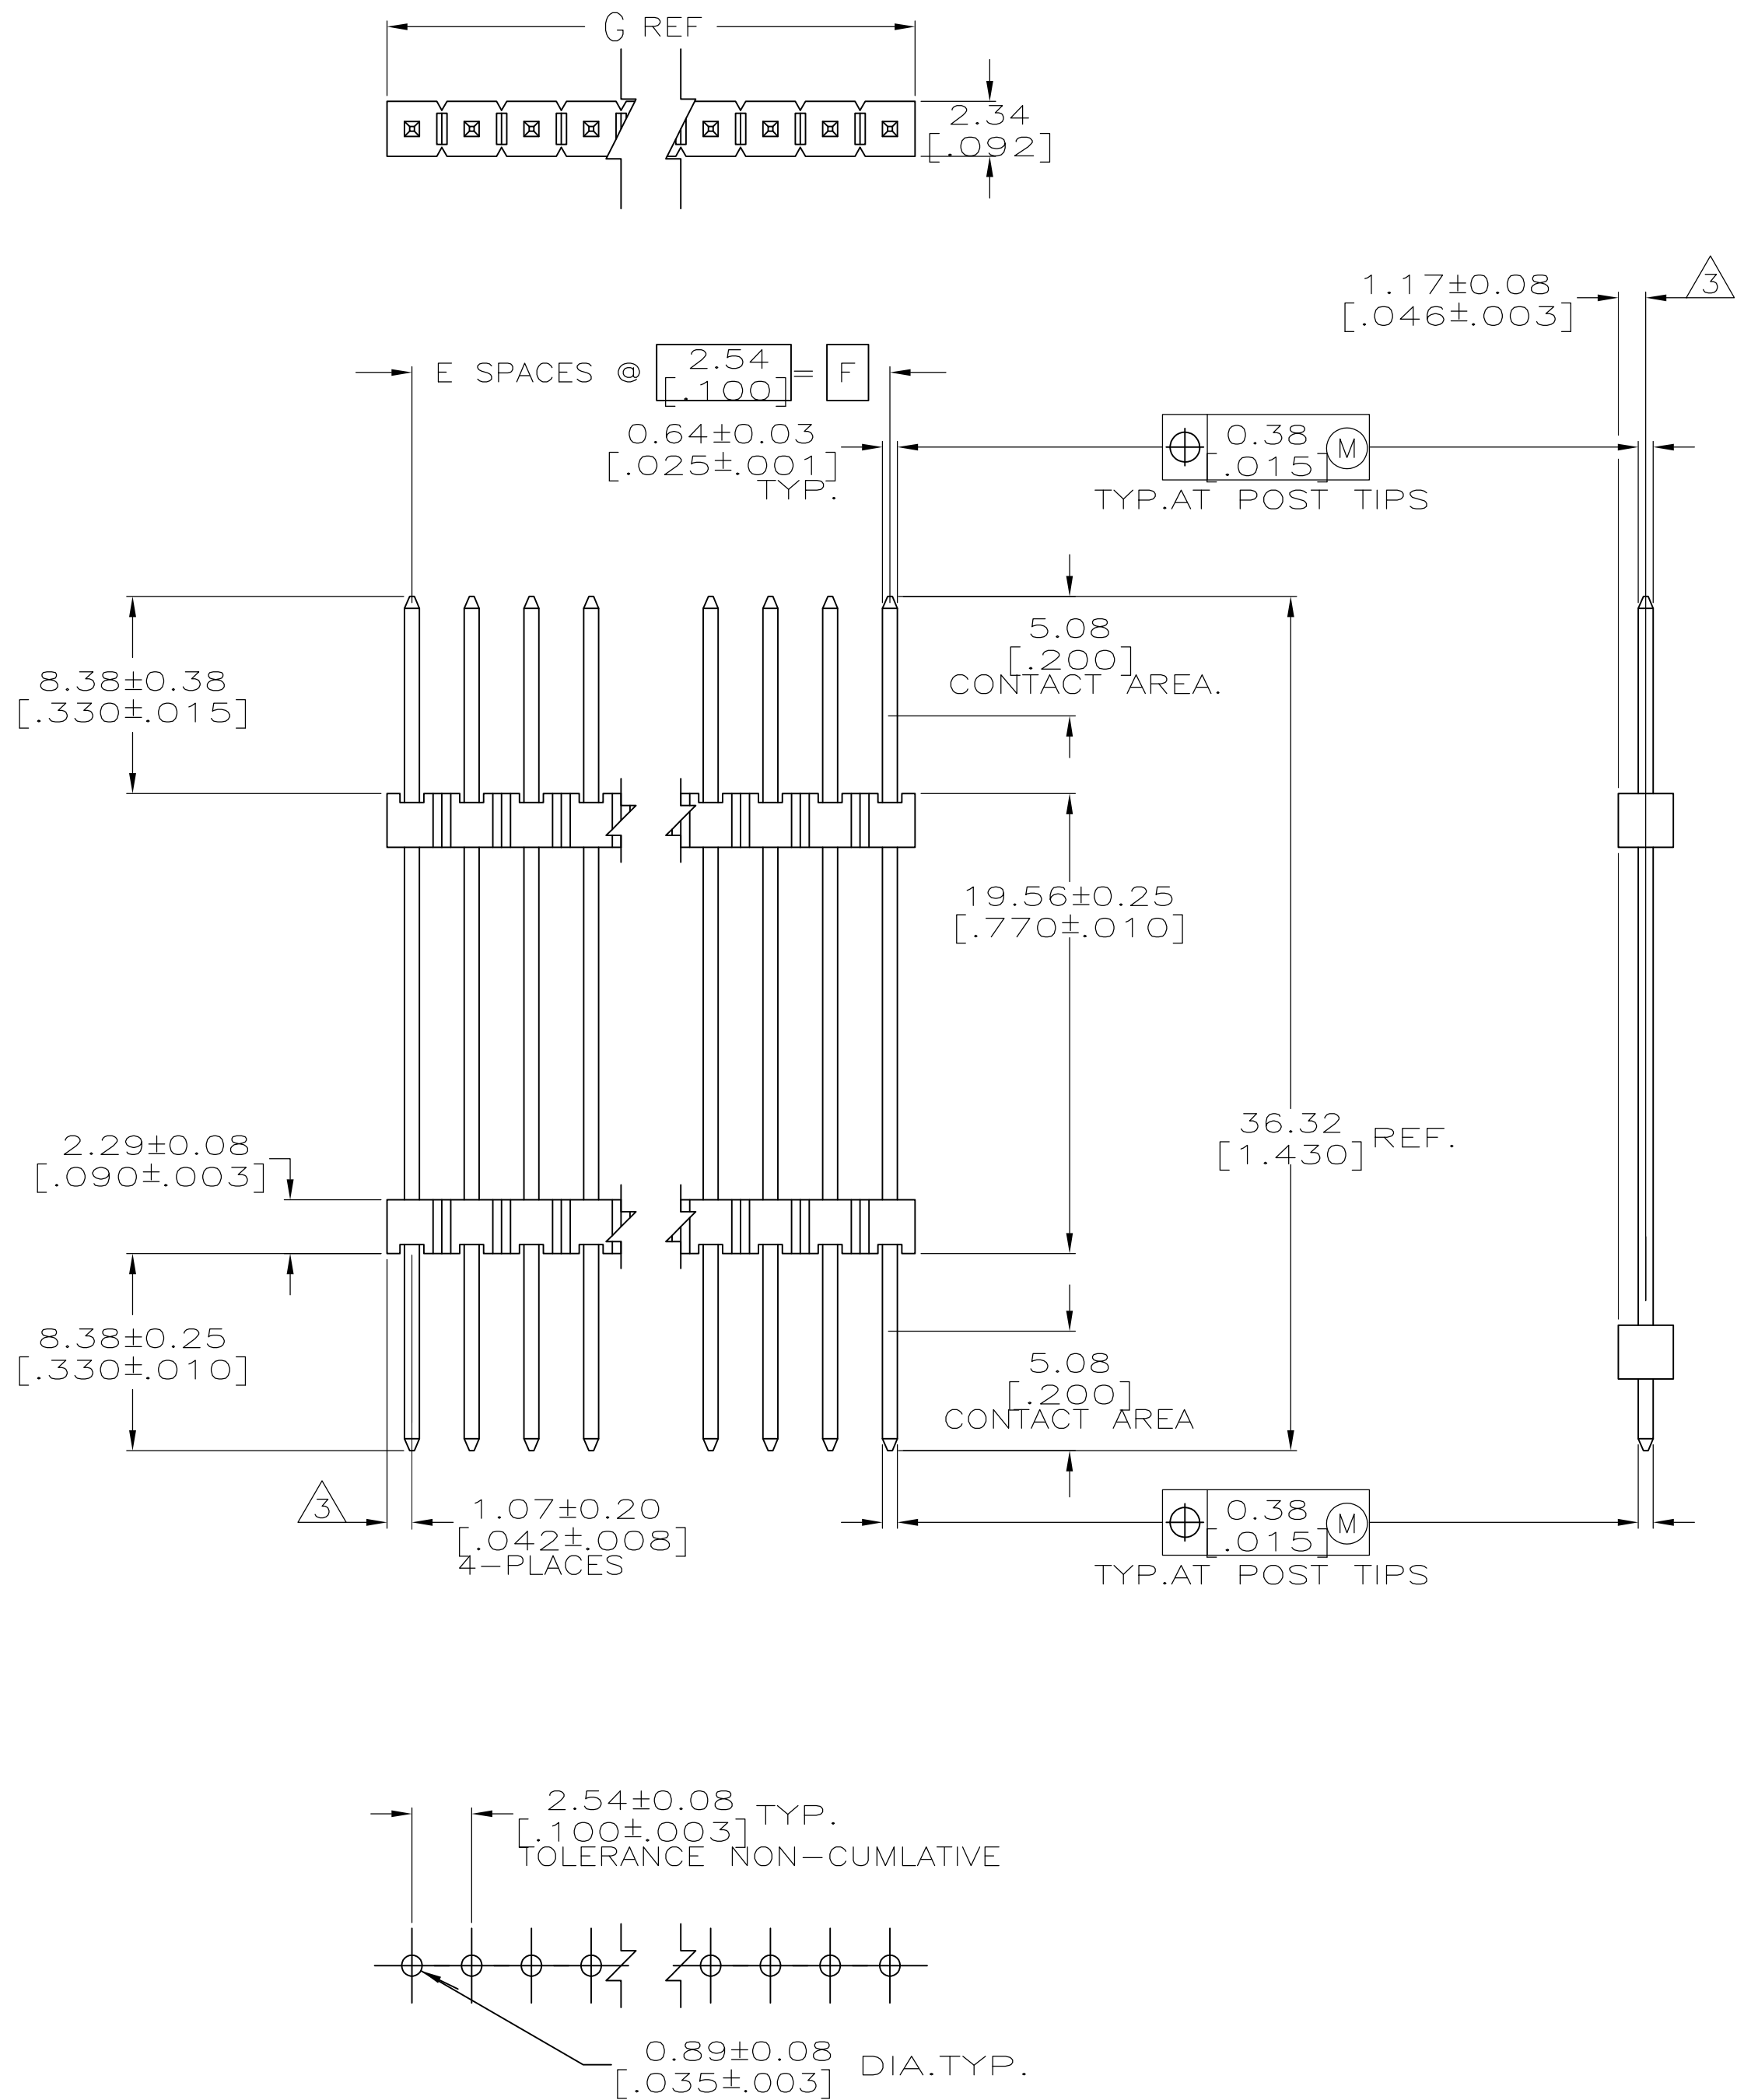


1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
ALL OVER 0.00127 [.000050] NICKEL ENTIRE POST.



RECOMMENDED HOLE LAYOUT

99.06	39	40	4-146482-0
[3.984]	[3.900]		
98.65	38	39	3-146482-9
[3.884]	[3.800]		
96.11	37	38	3-146482-8
[3.784]	[3.700]		
93.57	36	37	3-146482-7
[3.684]	[3.600]		
91.03	35	36	3-146482-6
[3.584]	[3.500]		
88.49	34	35	3-146482-5
[3.484]	[3.400]		
85.95	33	34	3-146482-4
[3.384]	[3.300]		
83.41	32	33	3-146482-3
[3.284]	[3.200]		
80.87	31	32	3-146482-2
[3.184]	[3.100]		
78.33	30	31	3-146482-1
[3.084]	[3.000]		
75.79	29	30	3-146482-0
[2.984]	[2.900]		
73.25	28	29	2-146482-9
[2.884]	[2.800]		
70.71	27	28	2-146482-8
[2.784]	[2.700]		
68.17	26	27	2-146482-7
[2.684]	[2.600]		
65.63	25	26	2-146482-6
[2.584]	[2.500]		
63.09	24	25	2-146482-5
[2.484]	[2.400]		
60.55	23	24	2-146482-4
[2.384]	[2.300]		
58.01	22	23	2-146482-3
[2.284]	[2.200]		
55.47	21	22	2-146482-2
[2.184]	[2.100]		
52.93	20	21	2-146482-1
[2.084]	[2.000]		
50.39	19	20	2-146482-0
[1.984]	[1.900]		
47.85	18	19	1-146482-9
[1.884]	[1.800]		
45.31	17	18	1-146482-8
[1.784]	[1.700]		
42.77	16	17	1-146482-7
[1.684]	[1.600]		
40.23	15	16	1-146482-6
[1.584]	[1.500]		
37.69	14	15	1-146482-5
[1.484]	[1.400]		
35.15	13	14	1-146482-4
[1.384]	[1.300]		
32.61	12	13	1-146482-3
[1.284]	[1.200]		
30.07	11	12	1-146482-2
[1.184]	[1.100]		
27.53	10	11	1-146482-1
[1.084]	[1.000]		
24.99	9	10	1-146482-0
[.984]	[.900]		
22.45	8	9	146482-9
[.884]	[.800]		
19.91	7	8	146482-8
[.784]	[.700]		
17.37	6	7	146482-7
[.684]	[.600]		
14.83	5	6	146482-6
[.584]	[.500]		
12.29	4	5	146482-5
[.484]	[.400]		
9.75	3	4	146482-4
[.384]	[.300]		
7.21	2	3	146482-3
[.284]	[.200]		
4.67	1	2	146482-2
[.184]	[.100]		
2.13	-	1	146482-1
[.084]	-		
G	F	E	NO. OF POSITIONS
			PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. NO. CHK. G. DUBNICZKI APVD G. DUBNICZKI	14-MAR-97 14-MAR-97 14-MAR-97 14-MAR-97	 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED
		PRODUCT SPEC			
MATERIAL		APPLICATION SPEC			
FINISH		WEIGHT		SIZE	CAGE CODE
				DRAWING NO A1 00779	RESTRICTED TO
		CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1
				REV P	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-146482-0](#)