

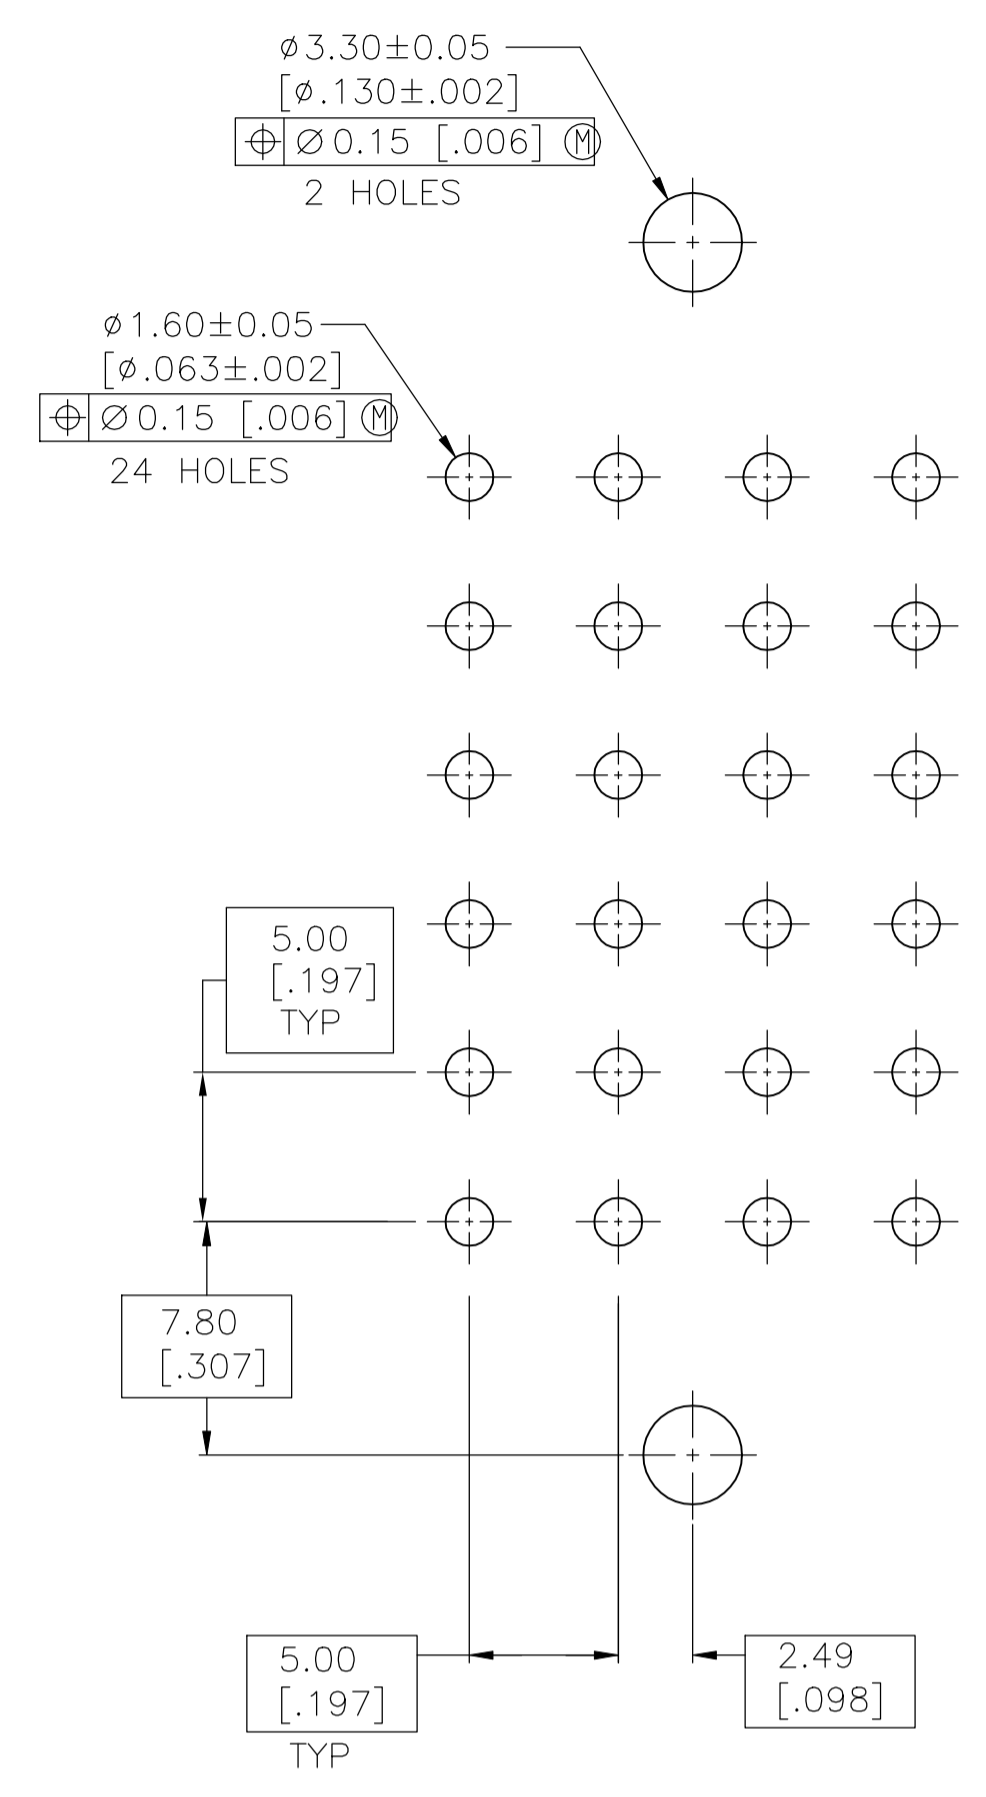
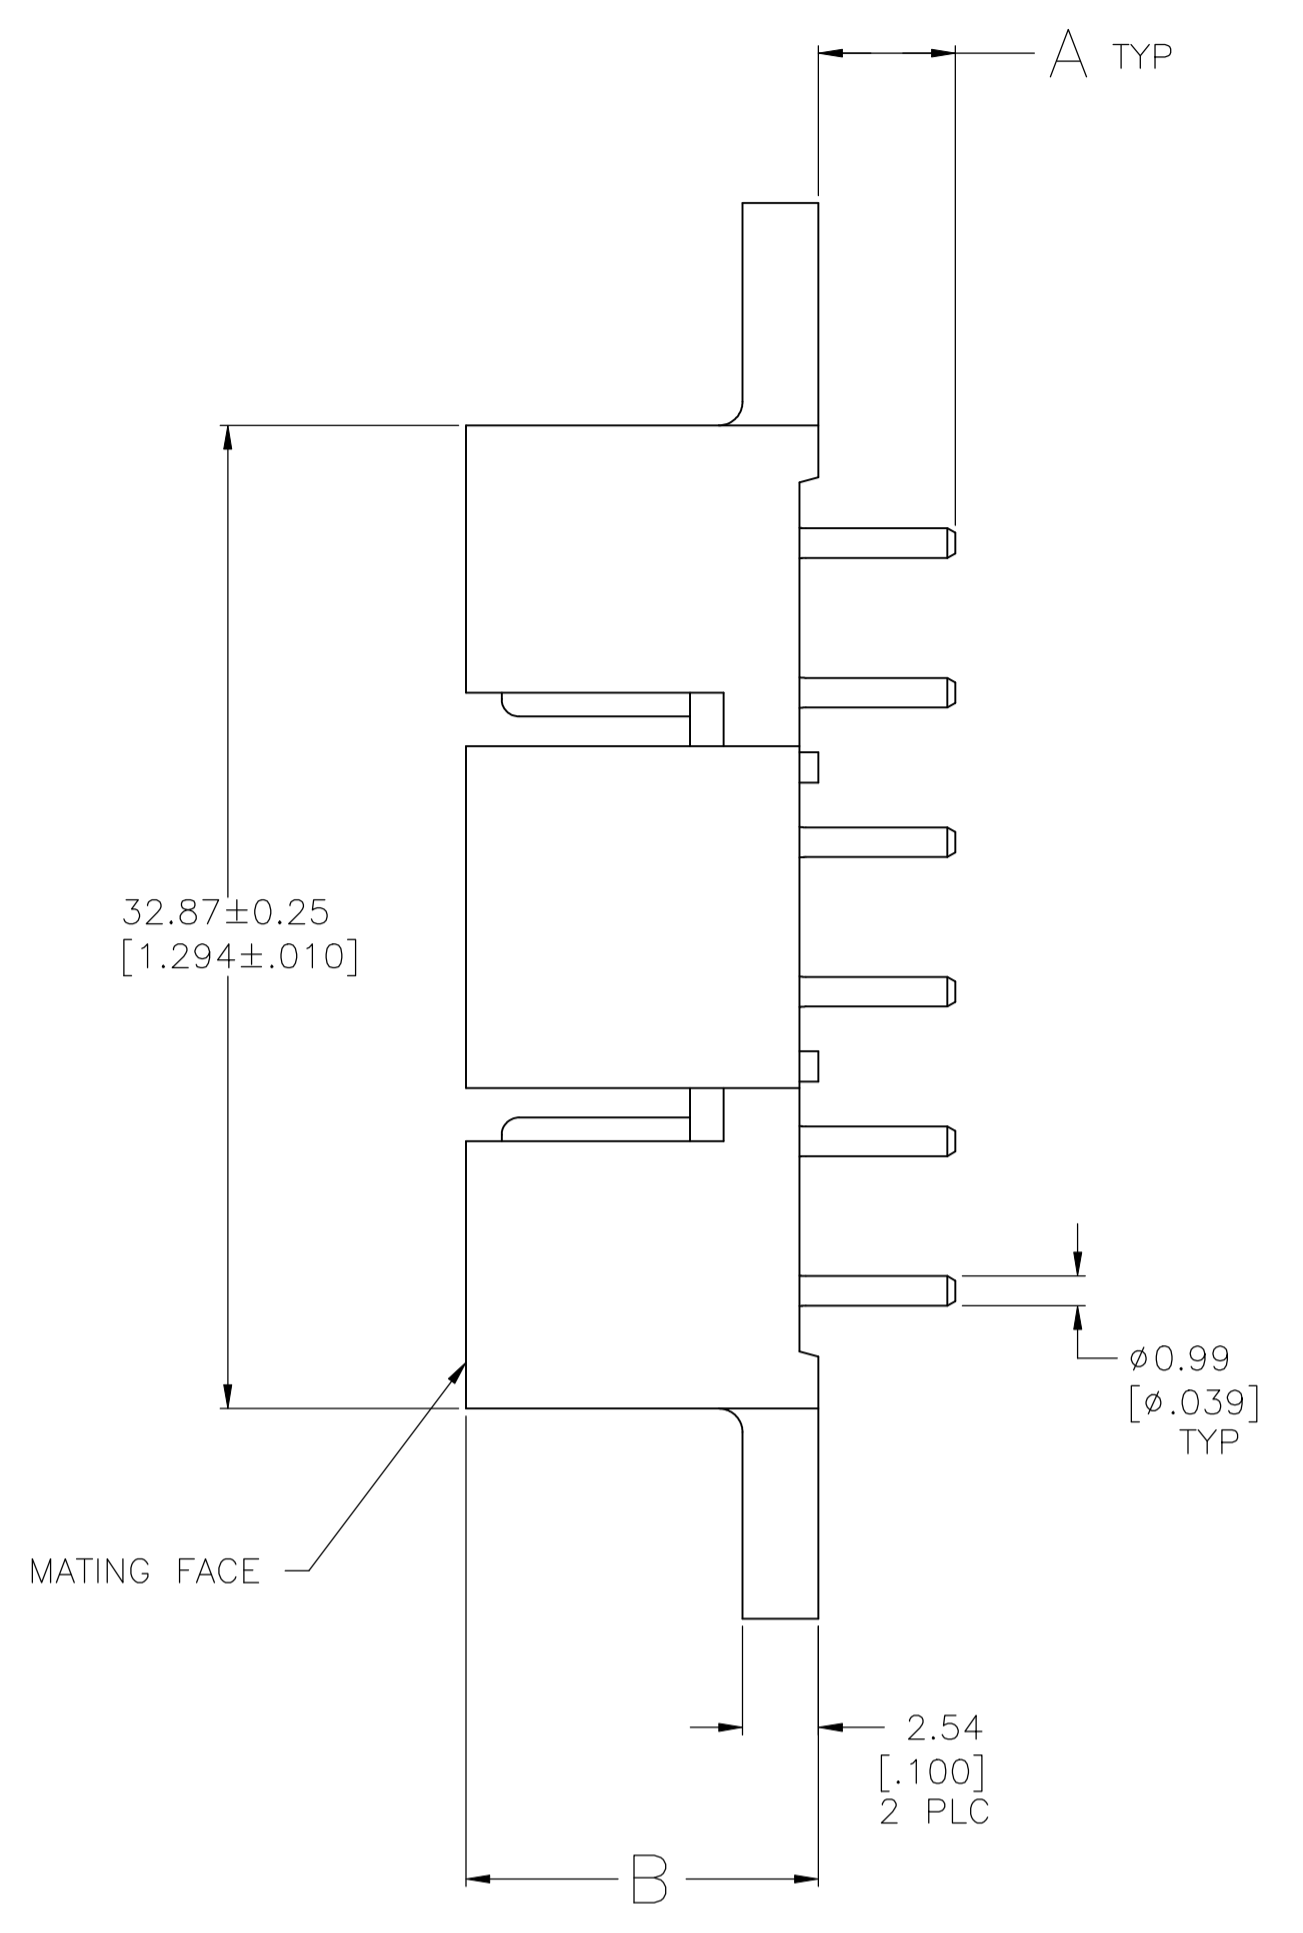


REVISIONS				
P. LTR	DESCRIPTION	DATE	DWN	APVD
AA	REVISED PER ECO-16-011265	12AUG2016	NK	MZ
AB	REV PER ECO-18-000441	23JAN2018	RS	MZ

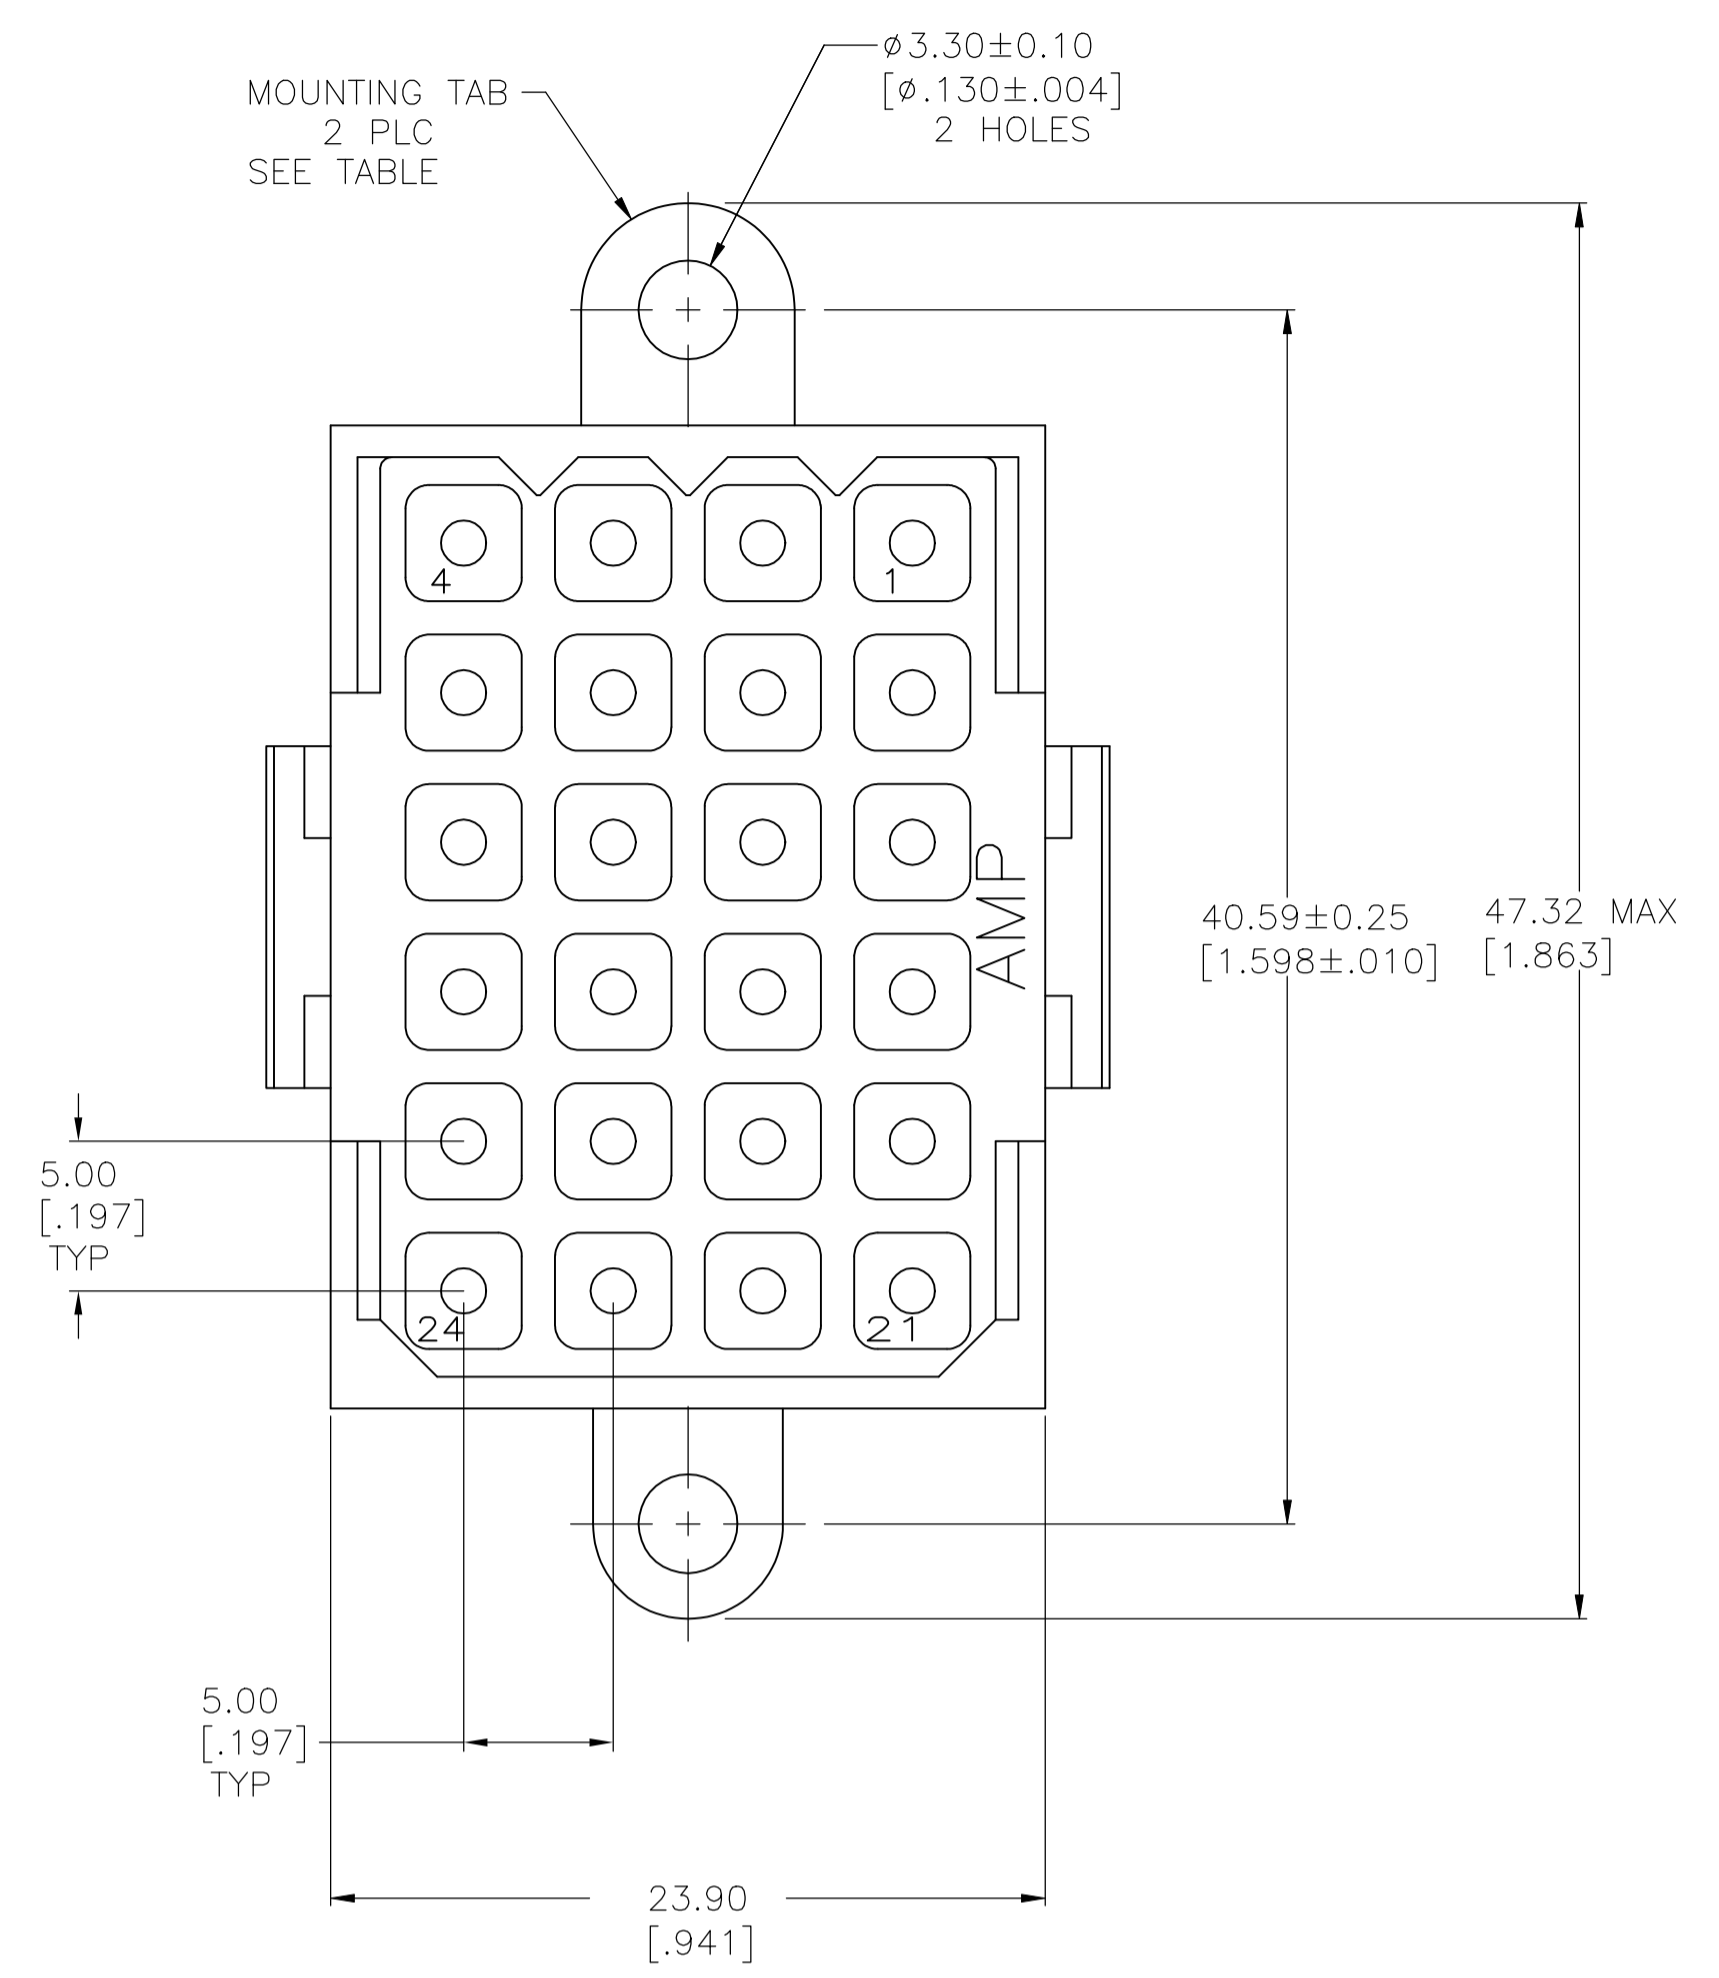

RECOMMENDED PC BOARD LAYOUT

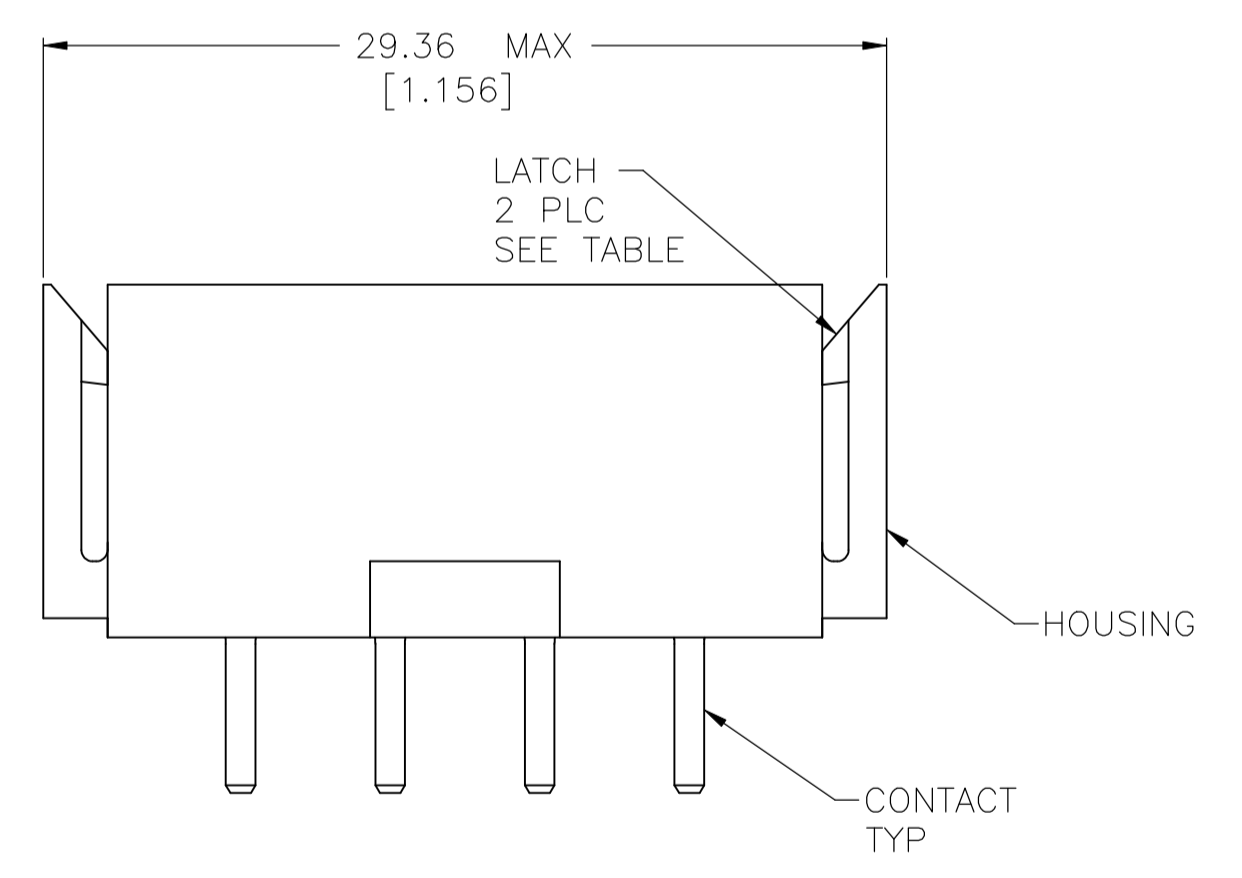

- 1 NYLON, UL 94V-0 RATED, RED.
- 2 BRASS PER ASTM B36.
- 3 3.81um [.000150] MIN TIN-LEAD OVER 2.54um [.000100] MIN COPPER OR 1.27um [.000050] MIN NICKEL.
- 4 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] FROM MATING END, 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.83 [.190] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 5 0.38um [.000015] MIN GOLD FOR A LENGTH OF 5.08 [.200] FROM MATING END, 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.83 [.190] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 6 .000150 MIN TIN OVER .000100 MIN COPPER OR .000050 MIN NICKEL.
- 7 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] FROM MATING END, 3.81um [.000150] MIN TIN FOR A LENGTH OF 4.83 [.190] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.

11.79[.464]	4.60±0.64[.181±.025]	YES	△	NO	1-206763-4
11.79[.464]	4.60±0.64[.181±.025]	YES	△	YES	1-206763-3
11.79[.464]	4.60±0.64[.181±.025]	YES	△	NO	1-206763-2
11.79[.464]	4.60±0.64[.181±.025]	YES	△	YES	1-206763-1
OBSOLETE	11.79[.464]	4.60±0.64[.181±.025]	NO	YES	206763-9
OBSOLETE	13.31[.524]	4.60±0.64[.181±.025]	YES	NO	206763-8
OBSOLETE	11.79[.464]	4.60±0.64[.181±.025]	YES	NO	206763-4
OBSOLETE	11.79[.464]	4.60±0.64[.181±.025]	YES	YES	206763-3
OBSOLETE	11.79[.464]	4.60±0.64[.181±.025]	YES	NO	206763-2
OBSOLETE	11.79[.464]	4.60±0.64[.181±.025]	YES	YES	206763-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	± 0.13 [005]
3 PLC	±
4 PLC	±
ANGLES	±

MATERIAL: HOUSING: 1

FINISH: CONTACT: SEE TABLE

APVD: A. TRAVIS

PRODUCT SPEC: 108-10033

APPLICATION SPEC: ---

WEIGHT: ---

CUSTOMER DRAWING

DATE: 03/11/92

DWN: R. STONE

3-17-92

NAME: ---

SIZE: A1

CAGE CODE: 00779

DRAWING NO: 206763

RESTRICTED TO: ---

SCALE: 4:1

SHEET: 1 OF 1

REV: AB

STE TE Connectivity Ltd.

PIN HEADER ASSEMBLY, 24 POSITION, METRIMATE