

THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
- ,N/A .
© COPYRIGHT N/A BY TYCO ELECTRONICS CORPORATION.
ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DF	S5	P	LTR	DESCRIPTION	DATE	DWN	APVD
		P		REV PER ECO-05-002582	06-05	AA	DE

PART NO.	'A'	'B'	REMARKS
860425-1	12.00 [304.8]	.38 [9.7]	5
860425-2	5.00 [127.0]	.38 [9.7]	OBsolete
860425-3	5.13 [130.3]	.25 [6.3]	OBsolete
860425-4	14.50 [368.3]	.38 [9.7]	OBsolete
860425-5	15.00 [381.0]	.38 [9.7]	OBsolete
860425-6	15.50 [393.7]	.38 [9.7]	OBsolete
5-860425-1	12.00 [304.8]	.38 [9.7]	6

D

1 TOLERANCE OF LEAD LENGTH:
UP TO 24 INCHES [609.6] = $\pm .12$ [± 3.0]
24 INCHES [609.6] & UP = $\pm 1\%$

2 MARKED PER MIL-STD-130.

3. TO MATE WITH AMP LGH-1/2L
RECEPTACLE WITH .89 [22.6] BARREL DEPTH.

4. OPERATING VOLTAGE: 15 KVDC AT 0 TO 70,000
FEET, -55°C TO 125°C .

5 PIGTAIL IS SOLDER DIPPED.


6 INSULATION CUT TO LENGTH, BUT NOT REMOVED.

C

B

A

SOCKET; SIZE #16
MAT'L: Be Cu PER QQ-C-530
FINISH: GOLD PER ASTM-B-488
OVER NICKEL PER QQ-N-290

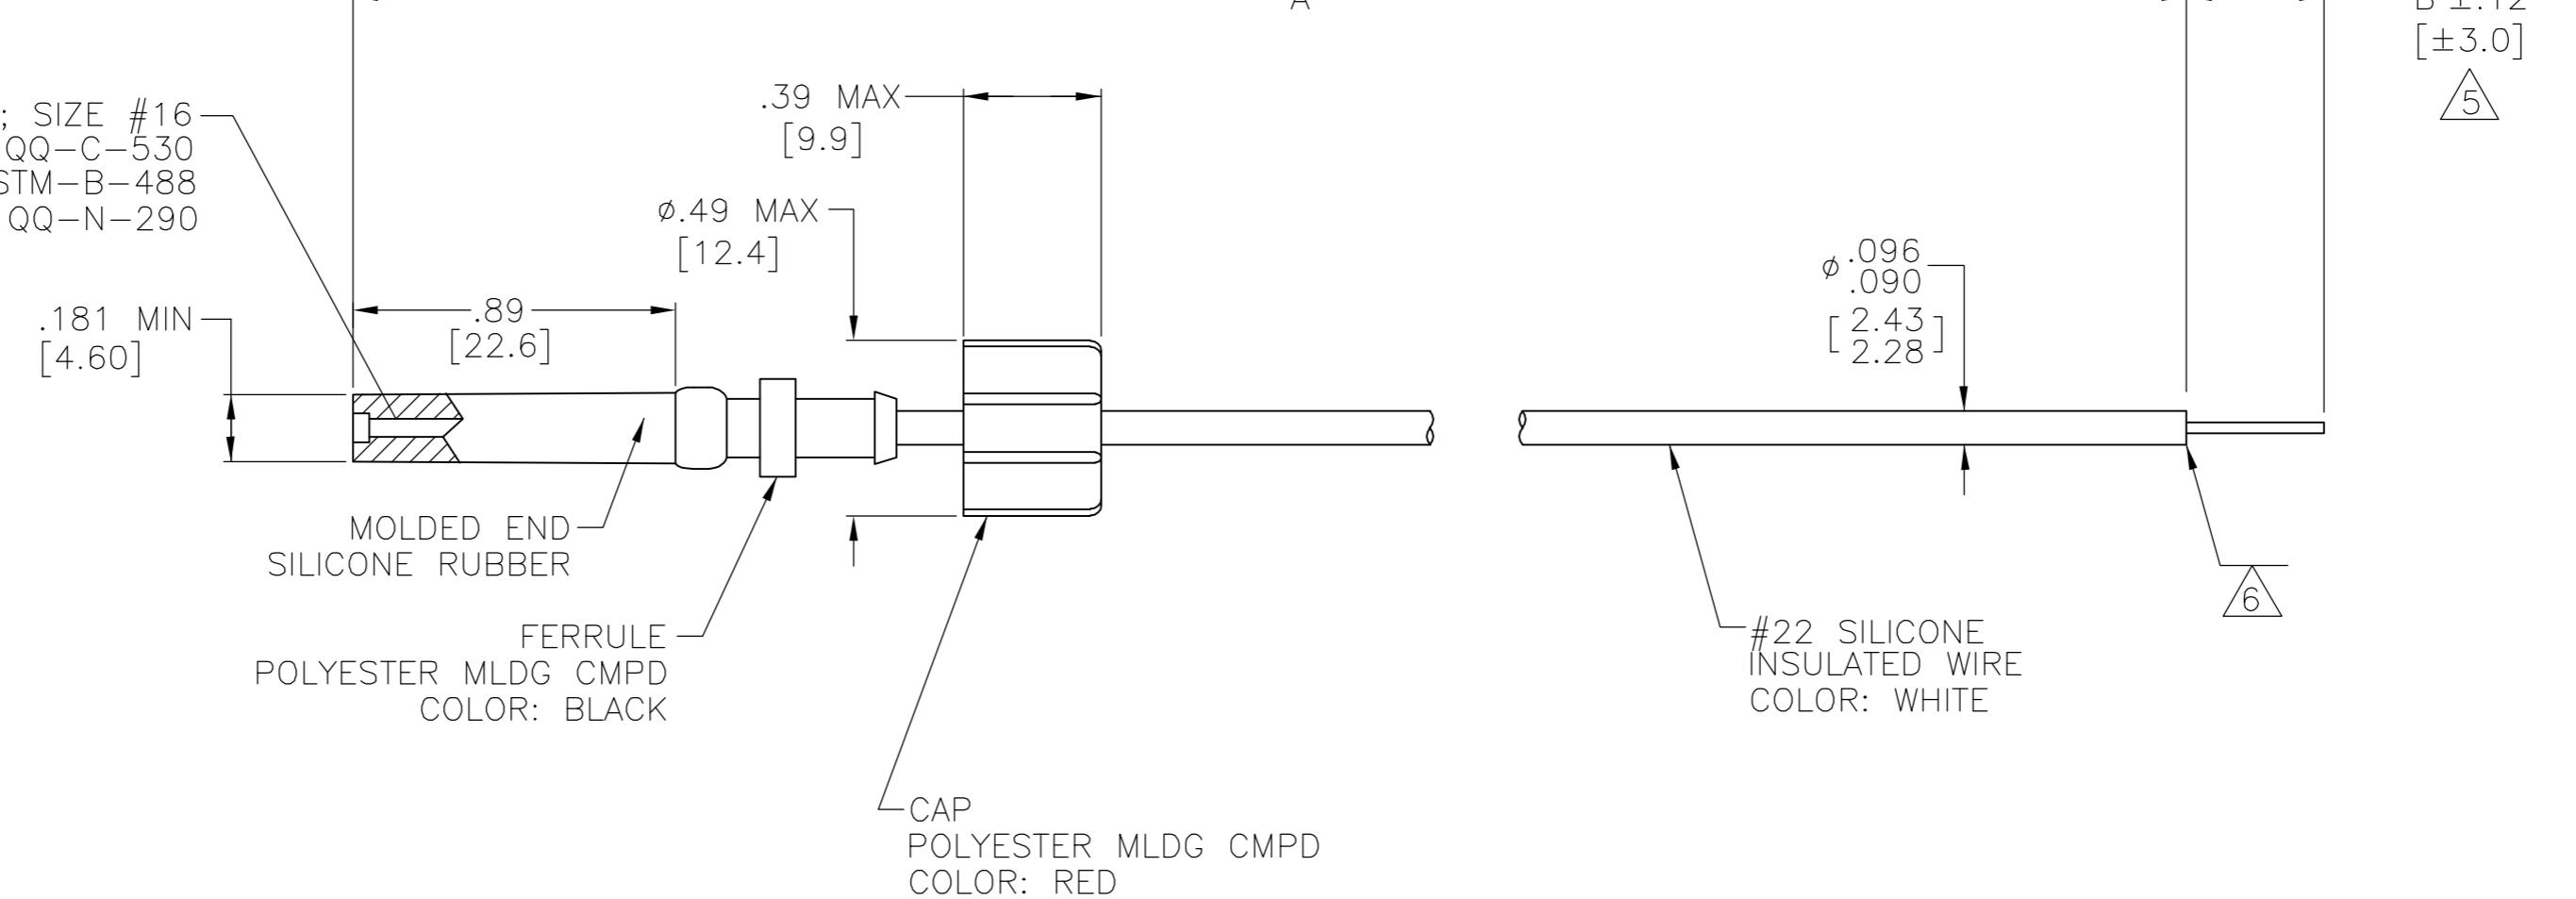

THIS DRAWING IS A CONTROLLED DOCUMENT.		13-FEB-90		tyco Electronics	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	R.J. RINEHART 27-MAR-90	D. EABY 27-MAR-90		
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	\pm - \pm - \pm .02 [0.5] \pm - \pm -	D. EABY 27-MAR-90	— — — — —	NAME	LEAD ASSEMBLY, POSITIVE STOP SGL END, LGH-1/2L W/#22 WIRE
MATERIAL SEE CALLOUTS	FINISH SEE CALLOUTS	WEIGHT —	APPLICATION SPEC	SIZE	CAGE CODE
				DRAWING NO	RESTRICTED TO
				A2 00779 C-860425	—
				CUSTOMER DRAWING	SCALE 2:1
					1 OF 1
					REV P

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-860425-1](#)