
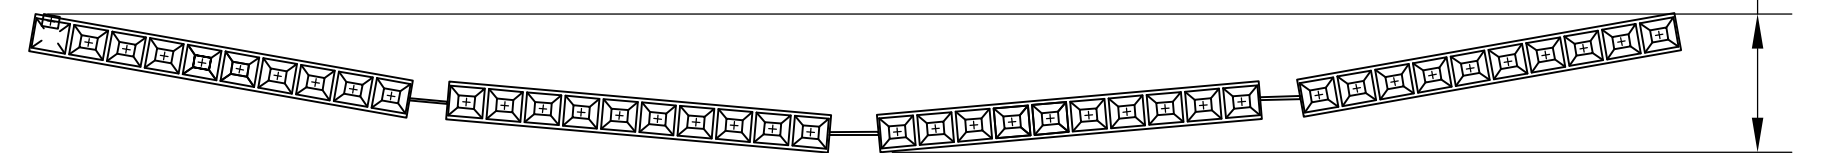
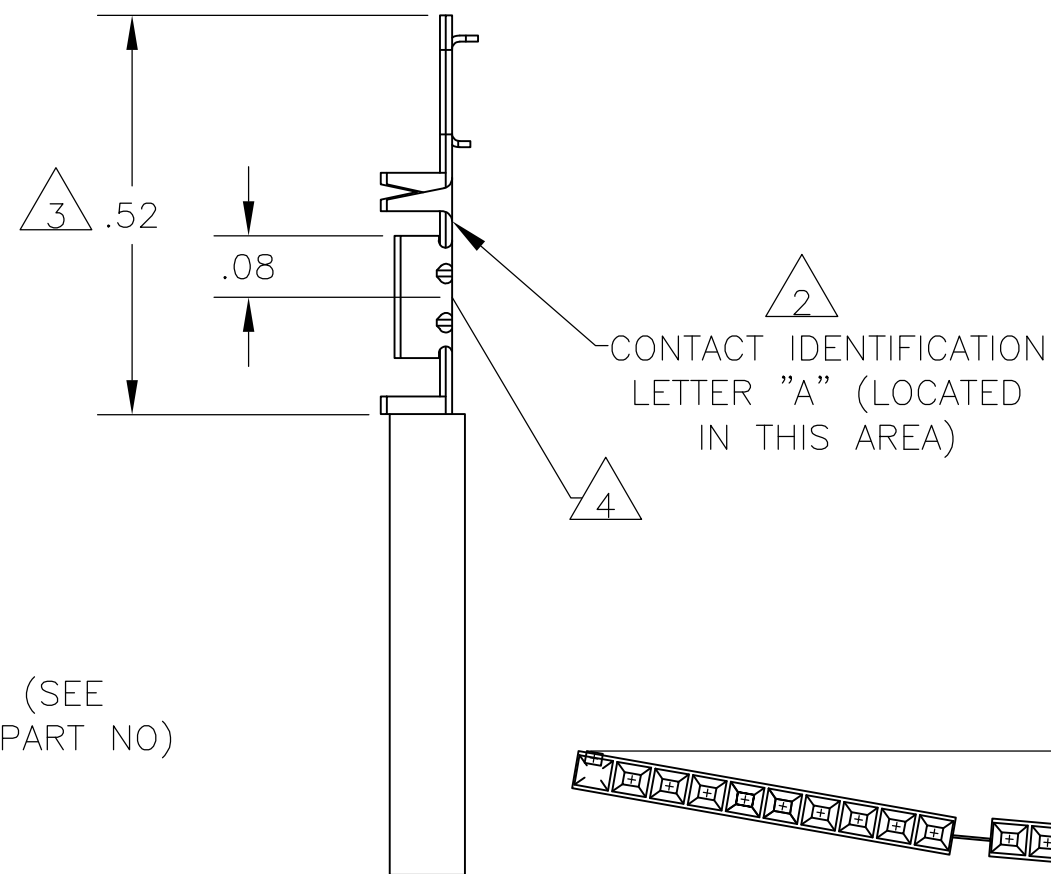


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			K	EC OG3C 0760 04	23DEC04	BSV	—
			K1	REVISED PER ECO-09-020774	26AUG09	KK	AEG

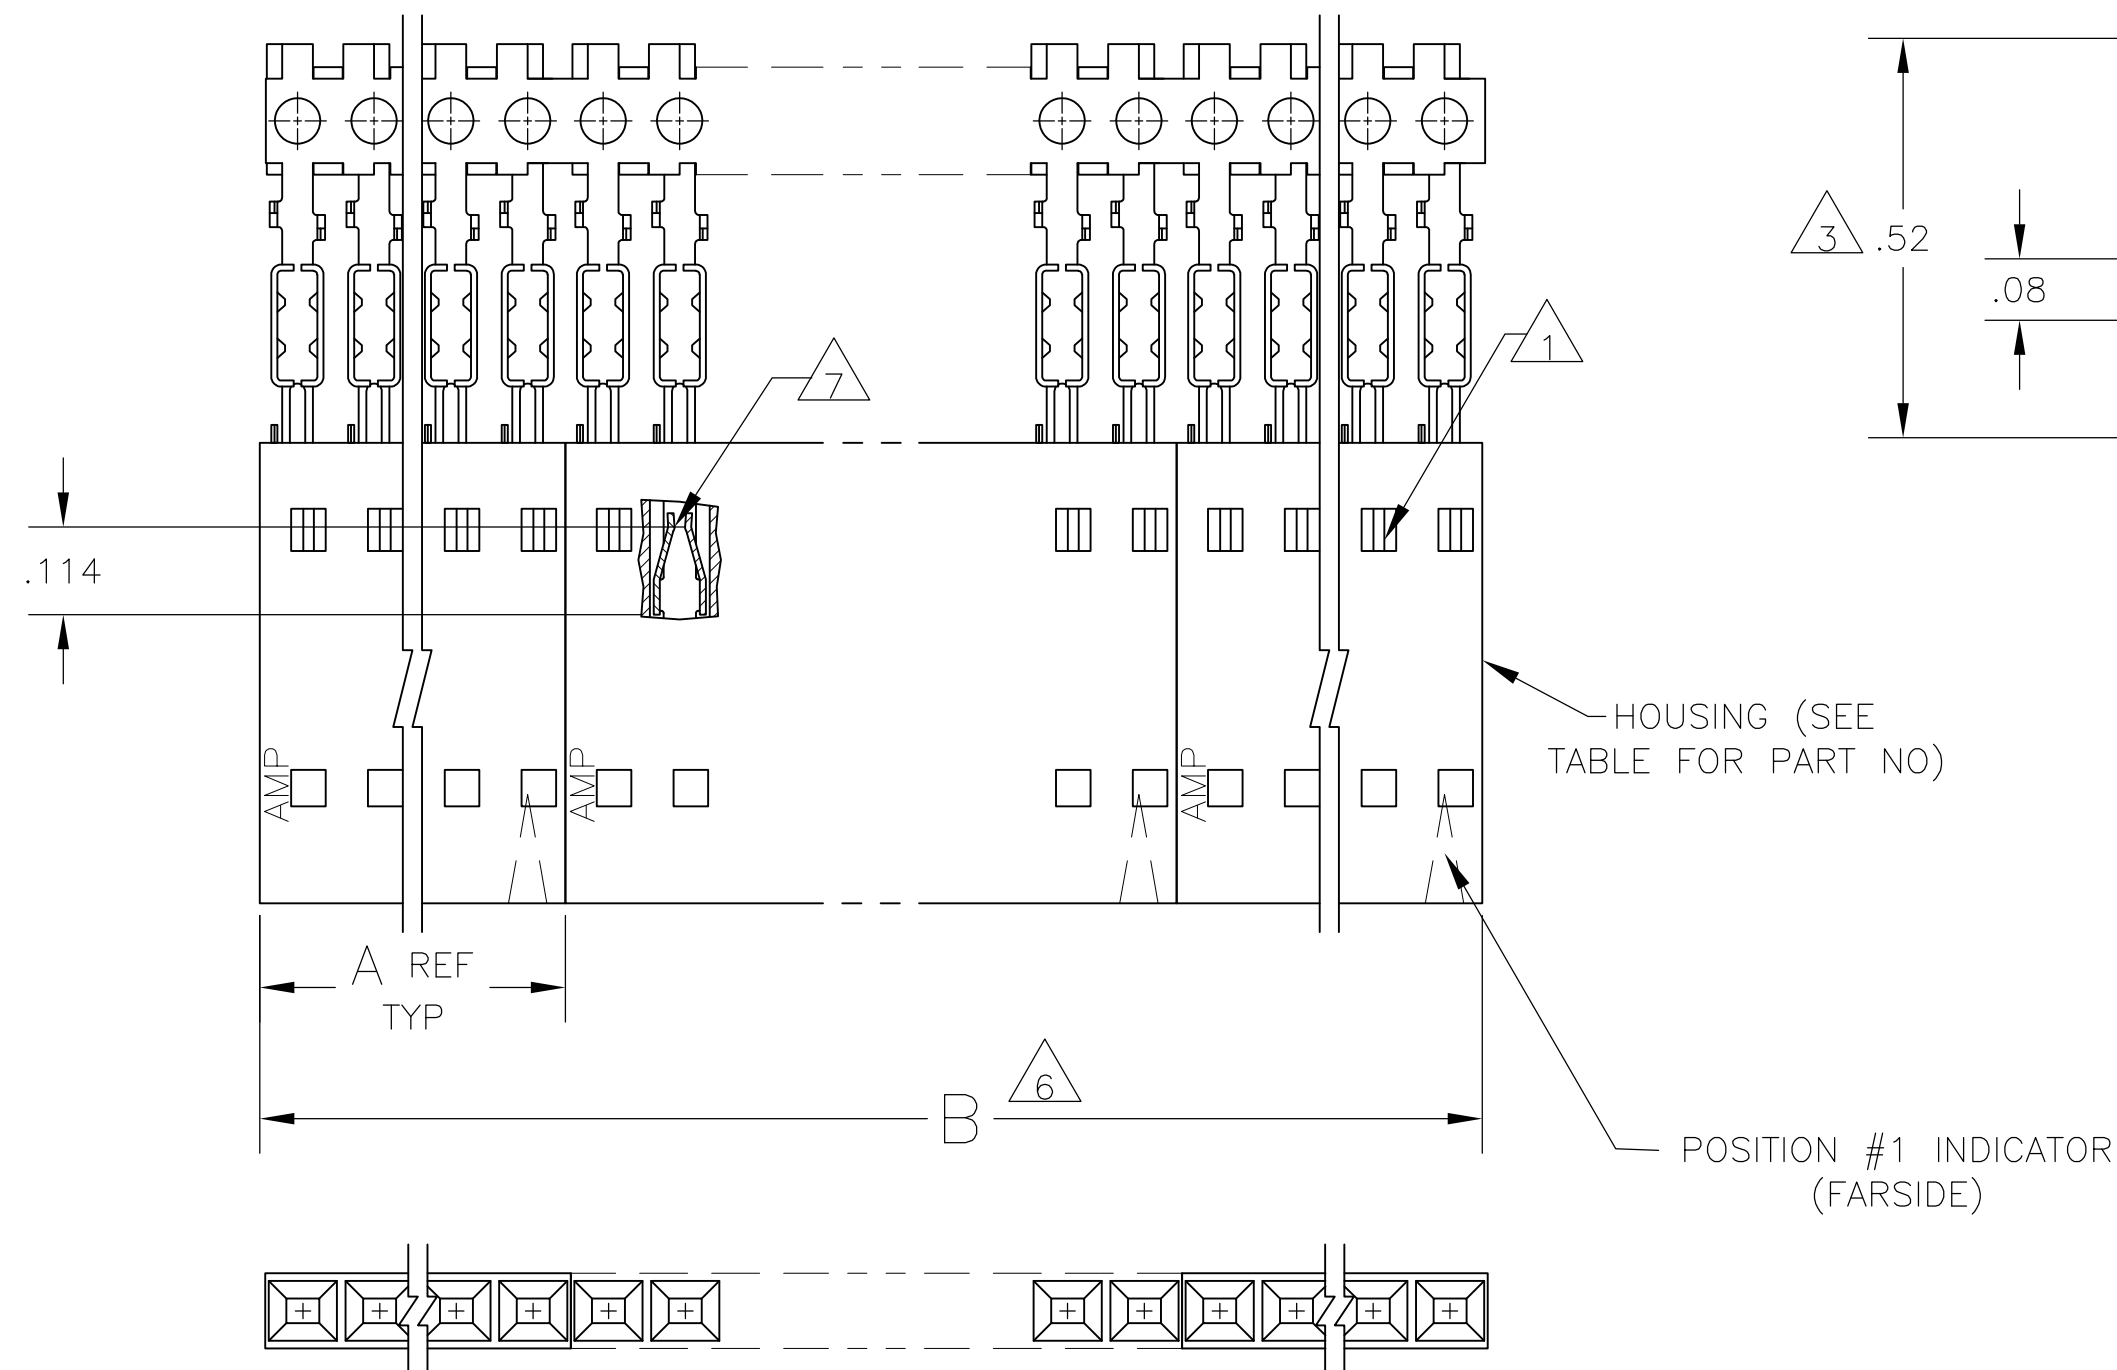

EXAMPLE: STRIP ASSEMBLY
SCALE 2:1

- ① CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- ② USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- ③ THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- ④ POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103684
- ⑥ ASSEMBLIES ARE JOINED BY THE CARRIER STRIP.
ORDER QUANTITY REFLECTS TOTAL NUMBER OF
INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE
FOR NUMBER OF ASSEMBLIES PER STRIP.
- ⑦ POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- ⑧ MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED.055.
- ⑨ CONTACTS: .000015 GOLD IN THE CONTACT AREA,.000050-.000100 BRIGHT TIN-LEAD
ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- ⑩ CONTACTS: .000015 GOLD IN THE CONTACT AREA,.000050-.000100 BRIGHT TIN
ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- ⑪ PRELIMINARY PART-NOT RELEASED FOR PRODUCTION.
- ⑫ HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC, COLOR BLACK.
- ⑬ CONTACTS: .000015 GOLD IN THE CONTACT AREA,.000050-.000100 MATTE TIN
ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- ⑭ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

4	OBsolete	13	2	2.40	1.198	1-103688-1	12	6-103978-1
4	OBsolete	13	2	2.20	1.098	1-103688-0	1 1	6-103978-0
4	OBsolete	13	2	2.00	.998	103688-9	10	5-103978-9
4	OBsolete	13	2	1.80	.898	103688-8	9	5-103978-8
4	OBsolete	13	2	1.60	.798	103688-7	8	5-103978-7
4	OBsolete	13	2	1.40	.698	103688-6	7	5-103978-6
4	OBsolete	13	4	2.39	.598	103688-5	6	5-103978-5
4		13	4	1.99	.498	103688-4	5	5-103978-4
		13	5	1.99	.398	103688-3	4	5-103978-3
		13	8	2.40	.298	103688-2	3	5-103978-2
		13	10	2.00	.198	103688-1	2	5-103978-1
		10	5	1.99	.398	103688-3	4	11 1-103978-2
		4	OBsolete	9	2	2.40	1.198	1-103688-1
4	OBsolete	9	2	2.20	1.098	1-103688-0	1 1	1-103978-0
4	OBsolete	9	2	2.00	.998	103688-9	10	103978-9
4	OBsolete	9	2	1.80	.898	103688-8	9	103978-8
4		9	2	1.60	.798	103688-7	8	103978-7
		9	2	1.40	.698	103688-6	7	103978-6
4	OBsolete	9	4	2.39	.598	103688-5	6	103978-5
4		9	4	1.99	.498	103688-4	5	103978-4
		9	5	1.99	.398	103688-3	4	103978-3
		9	8	2.40	.298	103688-2	3	103978-2
		9	10	2.00	.198	103688-1	2	103978-1
	PLATING	6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP	

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN L. MAYER 05 NOV 1986		 Tyco Electronics Corporation Harrisburg, Pa 17105-3608				
			CHK P.C.DEJONG 11-12-86						
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROV P.C.DEJONG 11-13-86		NAME RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L FOR #26-#30 AWG WIRE SIZE, STRIP FORM			
		0 PLC ± -		PRODUCT SPEC					
		1 PLC ± -		108-25034					
		2 PLC ± .02		APPLICATION SPEC					
		3 PLC ± .005		114-25026					
4 PLC ± -		ANGLES ± ± -		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL		FINISH		WEIGHT		A2 00779 C-103978			-
- 		SEE TABLE		CUSTOMER DRAWING					
						SCALE 4:1		SHEET 1 of 1	REV K1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103978-2](#)