




2.9mm Jack to 0.85mm Semi Rigid, Bulkhead

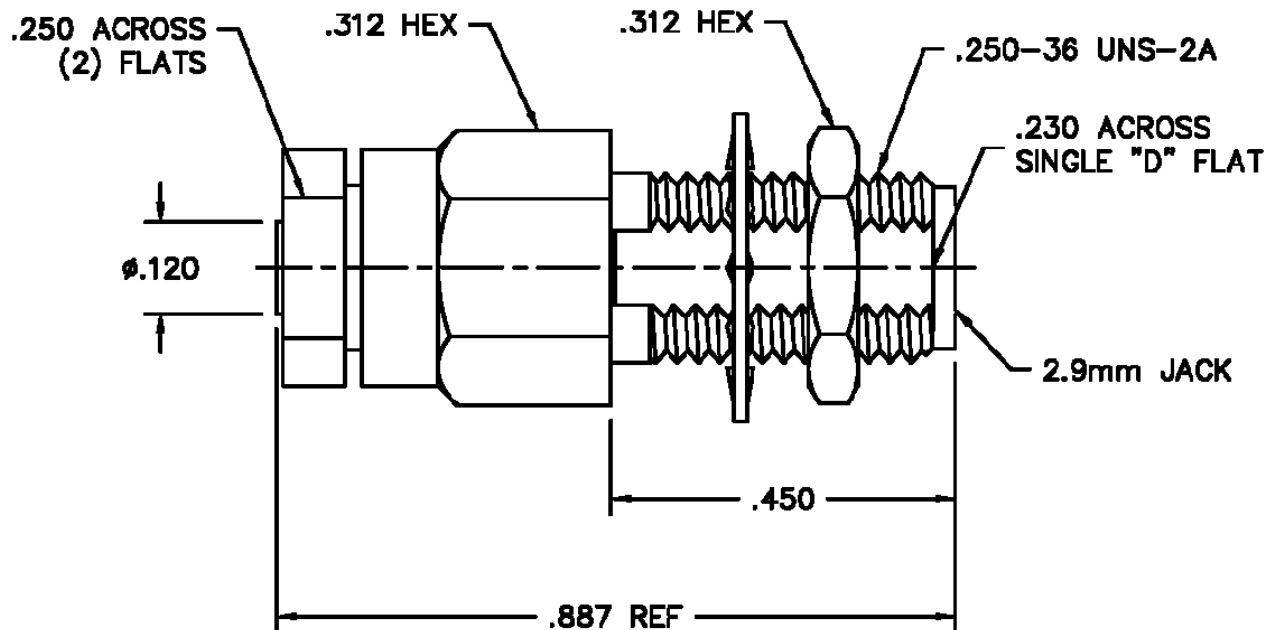

NOTES:

1.0 Materials

- 1.1 Contact: Heat Treated BeCu alloy per ASTM-B-196.
- 1.2 Body, Clamp Nut, and Jam Nut: 303 SST per ASTM-A-484 and ASTM-A-582.
- 1.3 Solder Ferrule: 360 Brass per ASTM-B16.
- 1.4 Lock Washer: 300 Series Stainless Steel.
- 1.5 O-Ring: Silicone per ZZ-R-765.

2.0 Finishes

- 2.1 Contact and Solder Ferrule: Gold Plate per ASTM-B-488 over nickel per QQ-N-290.
- 2.2 Body, Clamp Nut, Jam Nut, and Lock Washer: Passivated per ASTM-A-967-99.


Product Control:

Crystek Part Number:	CS-FFB-MSR	Release Date:	15-Aug-11
Revision Level:	B	Responsible:	K. Piotrowicz






- 1.1 Trim cable to expose dielectric core as shown.
- 1.2 Pre-tin cable jacket to approximate dimension shown.

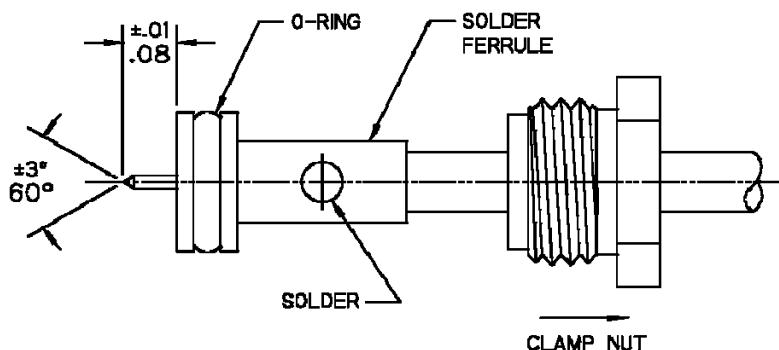

- 2.1 Slide clamp nut onto cable in orientation shown.
- 2.2 Insert cable into solder ferrule until fully seated, then solder cable to ferrule where shown.
- 2.3 Trim cable dielectric flush with ferrule face (do not score center conductor), then point center conductor as shown.

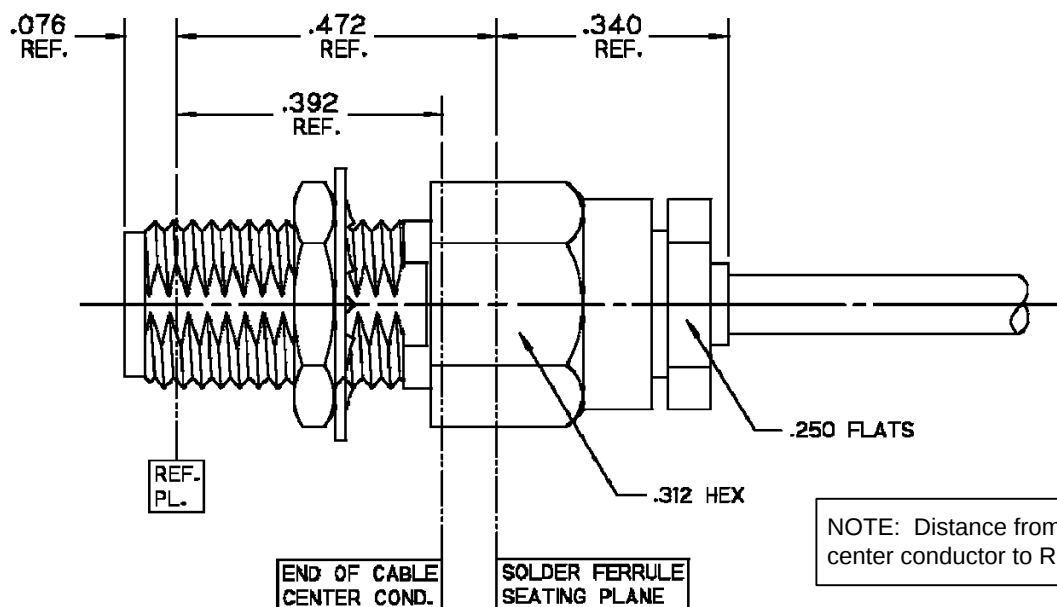

3.1 Insert cable sub-assembly into connector body until solder ferrule is seated and tighten clamp nut to 25-35 in. lbs.

Crystek Part Number:	CS-FFB-MSR	Release Date:	15-Aug-11
Revision Level:	B	Responsible:	K. Piotrowicz

CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Crystek:](#)

[CS-FFB-MSR](#)