

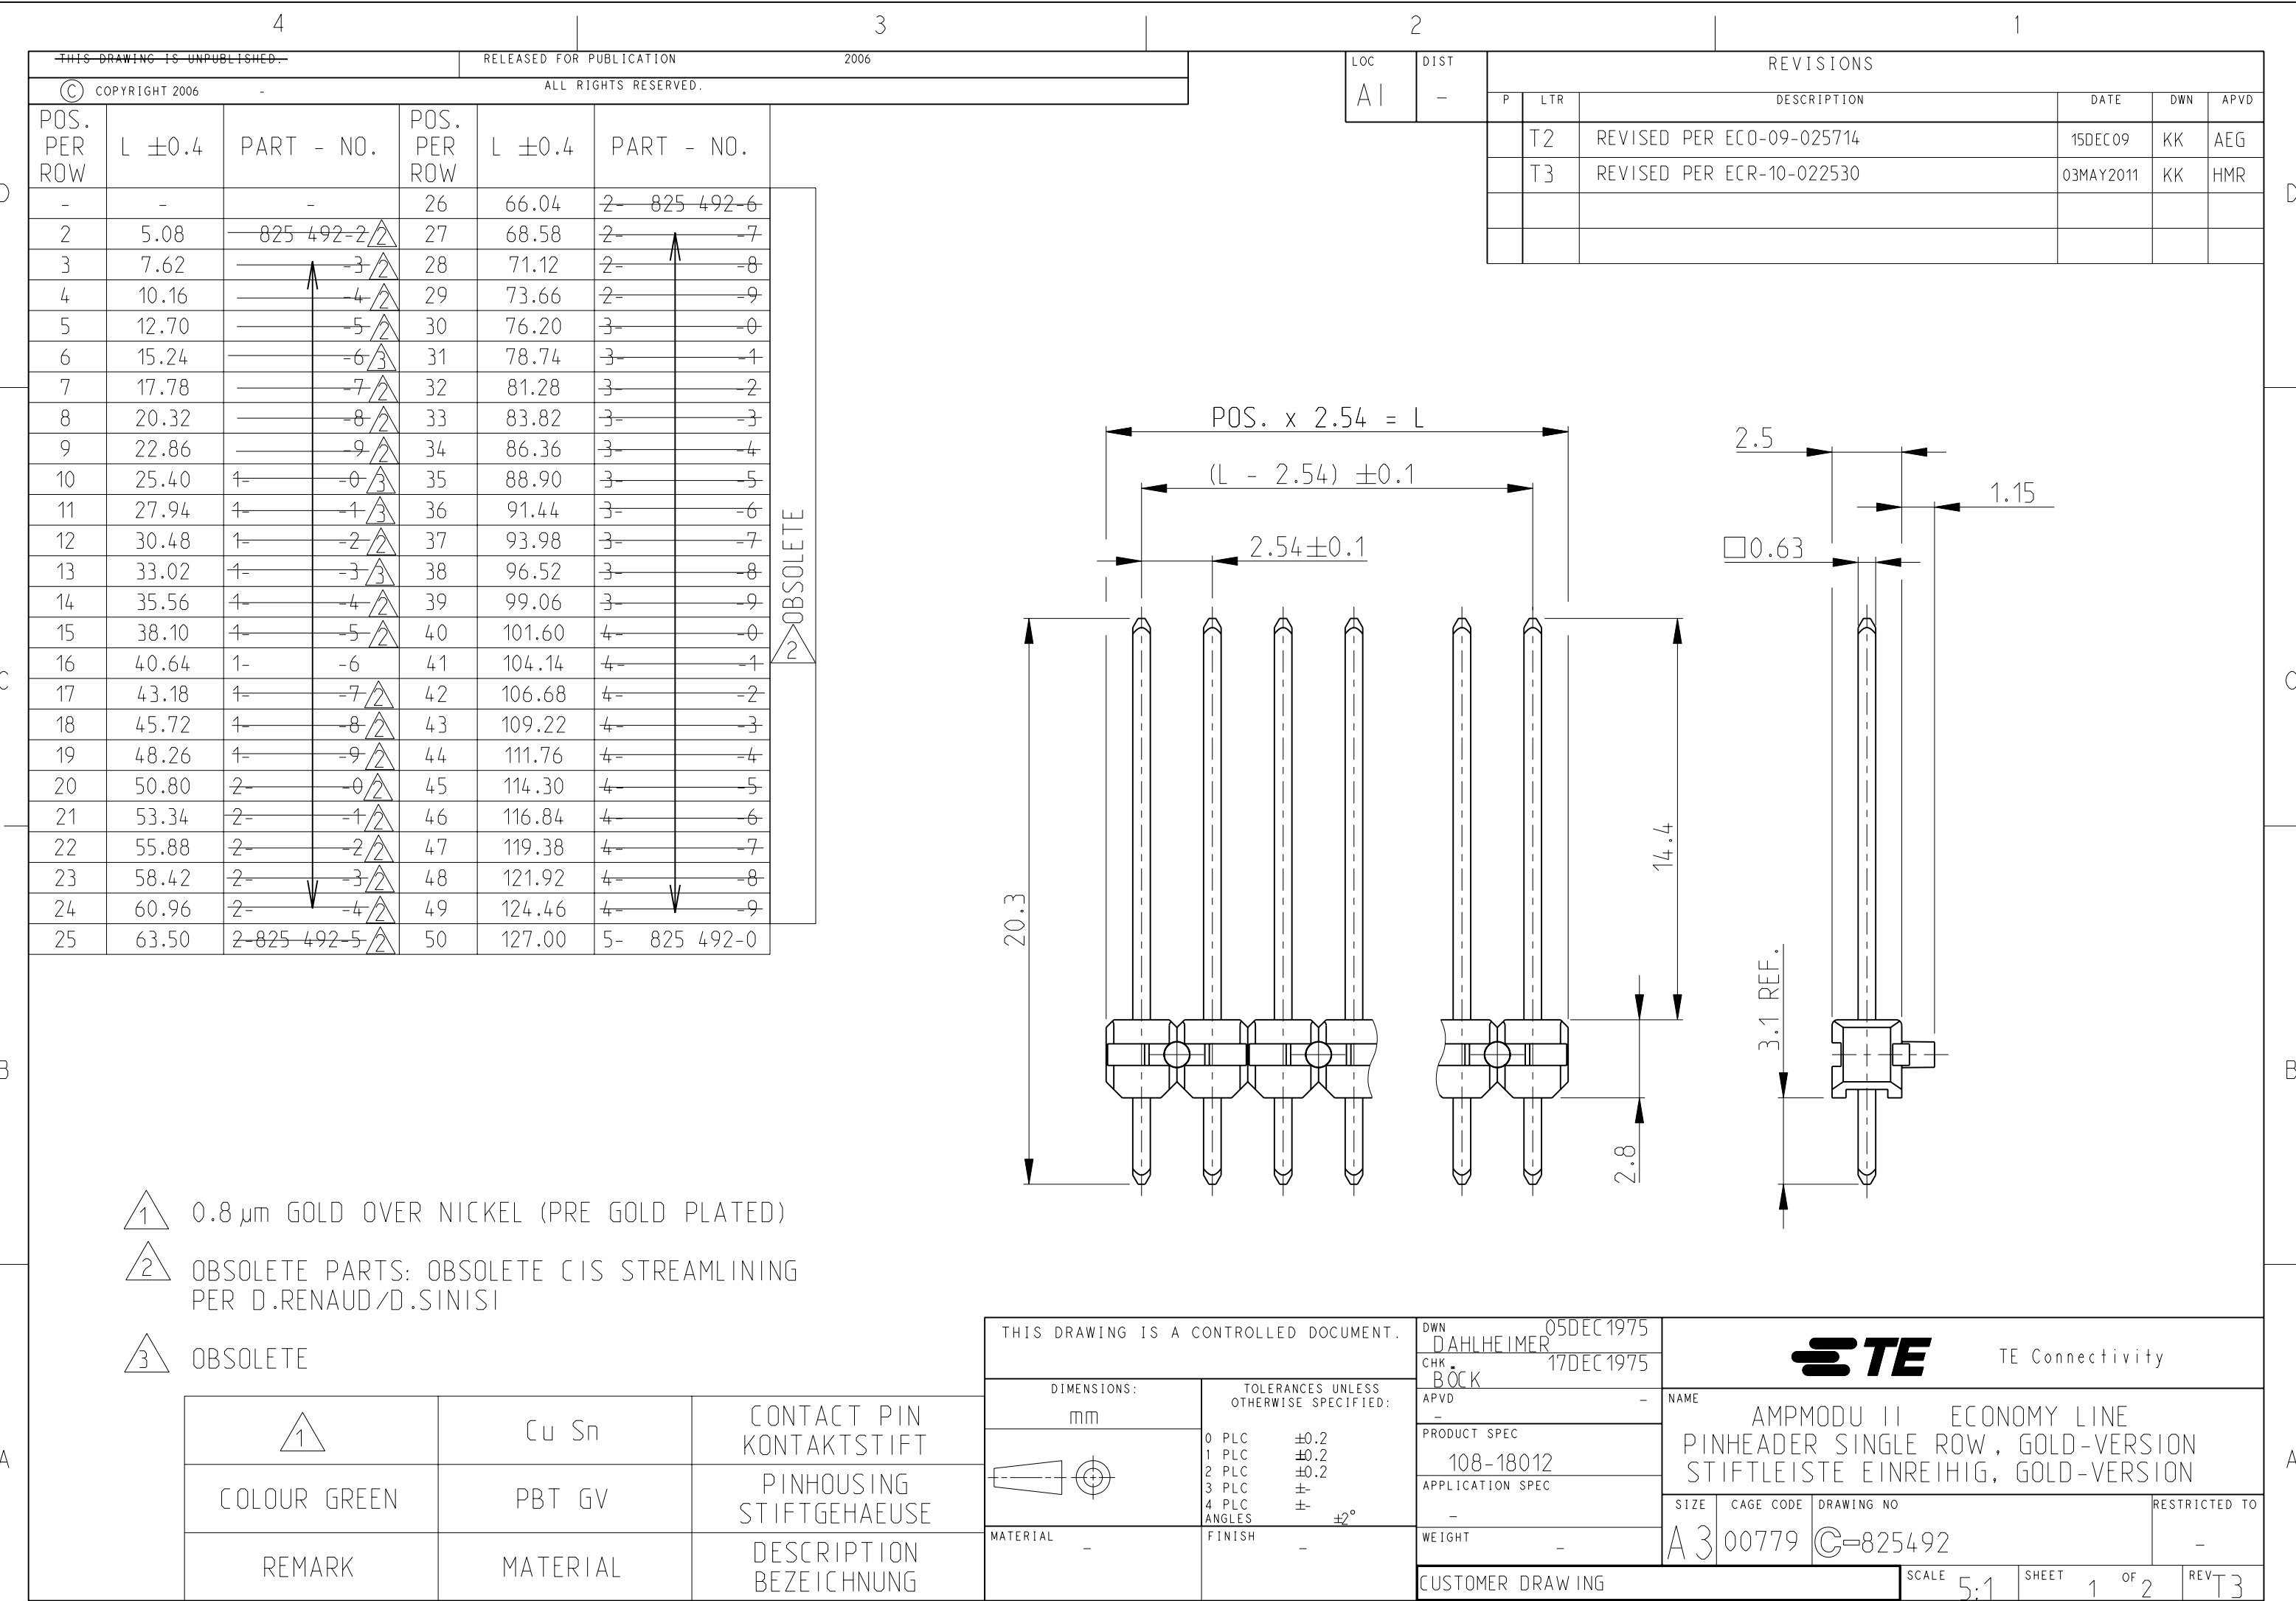


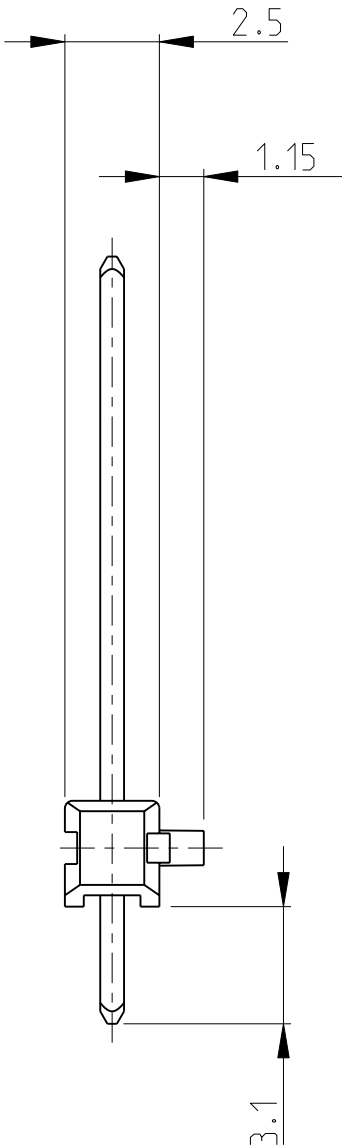

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
A1	-		-	SEE SHEET 1	-	-	-

POS. PER ROW	L -0.8	PART - NO.		POS. PER ROW	L -0.8	PART - NO.	
-	-	-	-	26	66.04	7-	-6
2	5.08	5-	-2	27	68.58	7-	-7
3	7.62	5-	-3	28	71.12	7-	-8
4	10.16	5-	-4	29	73.66	7-	-9
5	12.70	5-	-5	30	76.20	8-	-0
6	15.24	5-	-6	31	78.74	8-	-1
7	17.78	5-	-7	32	81.28	8-	-2
8	20.32	5-	-8	33	83.82	8-	-3
9	22.86	5-825 492-9/2	-	34	86.36	8-	-4
10	25.40	6-	-0	35	88.90	8-	-5
11	27.94	6-	-1	36	91.44	8-	-6
12	30.48	6-	-2	37	93.98	8-	-7
13	33.02	6-	-3	38	96.52	8-	-8
14	35.56	6-	-4	39	99.06	8-	-9
15	38.10	6-	-5	40	101.60	9-	-0
16	40.64	6-	-6	41	104.14	9-	-1
17	43.18	6-	-7	42	106.68	9-	-2
18	45.72	6-	-8	43	109.22	9-	-3
19	48.26	6-	-9	44	111.76	9-	-4
20	50.80	7-	-0	45	114.30	9-	-5
21	53.34	7-	-1	46	116.84	9-	-6
22	55.88	7-	-2	47	119.38	9-	-7
23	58.42	7-	-3	48	121.92	9-	-8
24	60.96	7-	-4	49	124.46	9-	-9
25	63.50	7-	-5	50	127.00	5-	-0

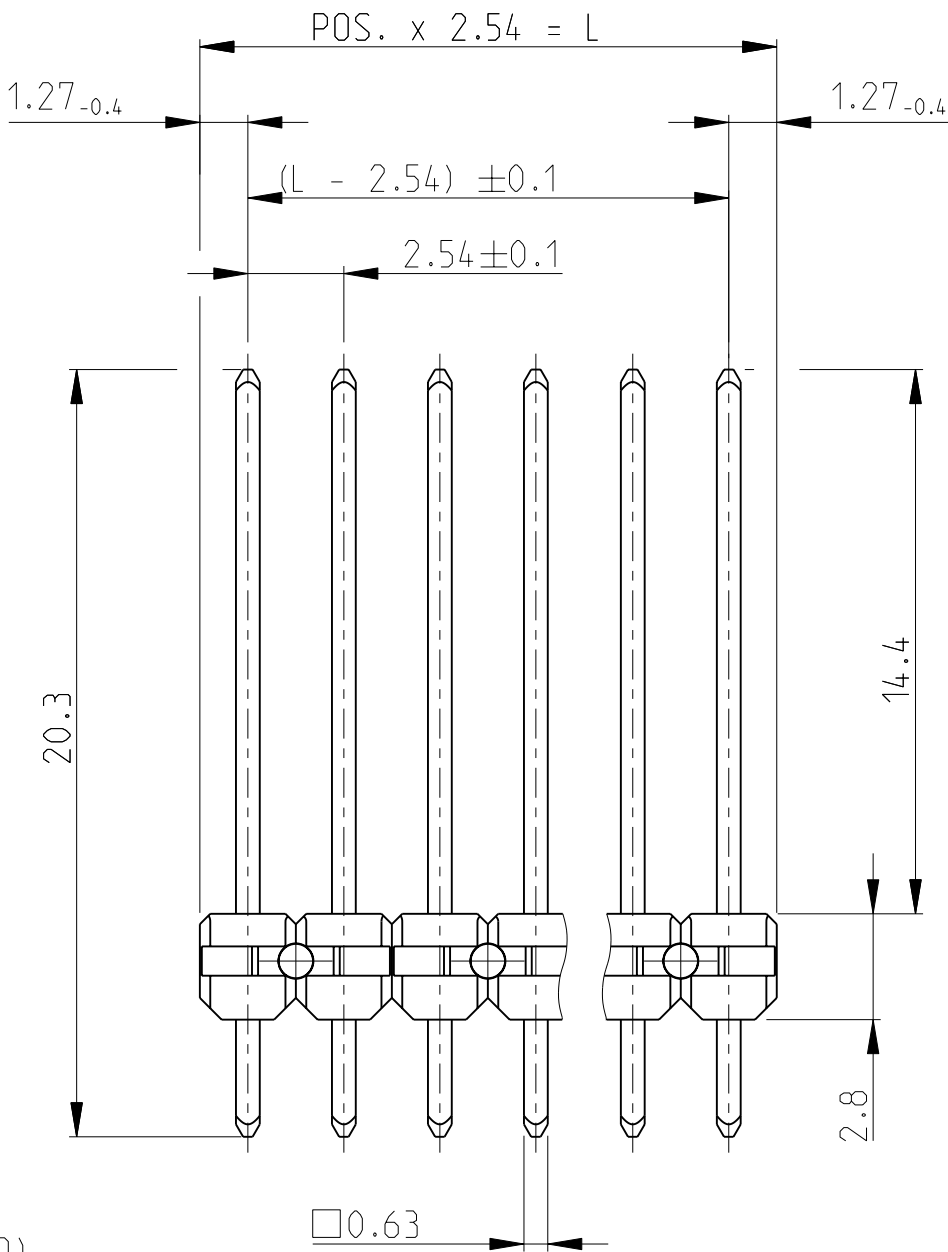


- 1

0.8 μm GOLD OVER NICKEL (PRE GOLD PLATED)
- 2

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

1	Cu Sn	CONTACT PIN KONTAKTSTIFT
COLOUR GREEN	PBT GV	PINHOUSING STIFTGEHAEUSE
REMARK	MATERIAL	DESCRIPTION BEZEICHNUNG

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAHLHEIMER 05DEC 1975	TE TE Connectivity						
		CHK BÖCK 17DEC 1975							
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD -	NAME AMPMODU II ECONOMY LINE PINHEADER SINGLE ROW, GOLD-VERSION STIFTELEISTE EINREIHIG, GOLD-VERSION						
	0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.2 3 PLC ± 4 PLC ± ANGLES ±2°	PRODUCT SPEC 108-18012							
	MATERIAL -	FINISH -	APPLICATION SPEC -	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
			WEIGHT -	A3	00779	©-825492	-		
CUSTOMER DRAWING				SCALE	5:1	SHEET	2 OF 2	REV	T3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-825492-6](#)