


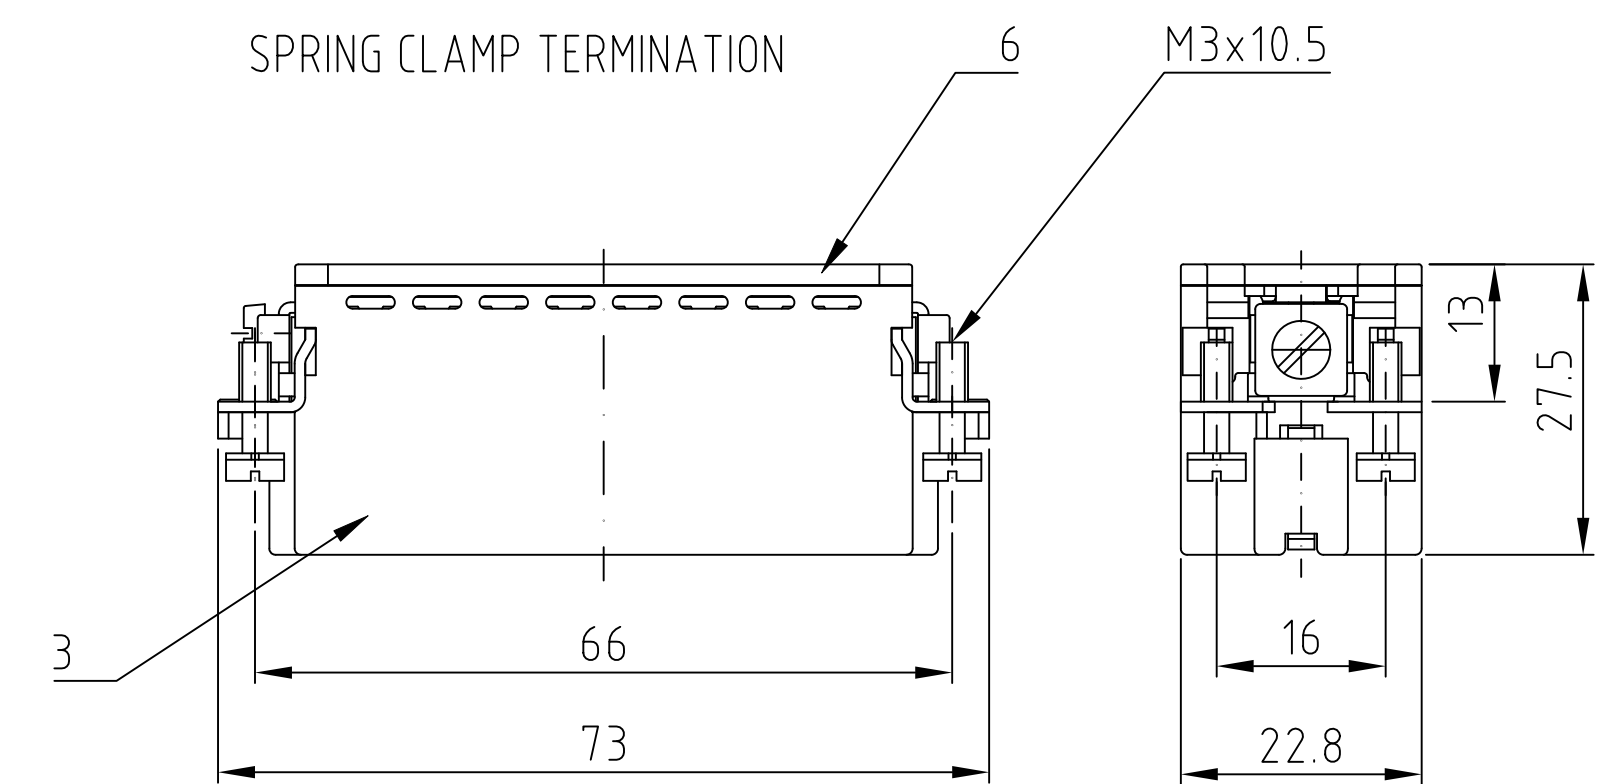


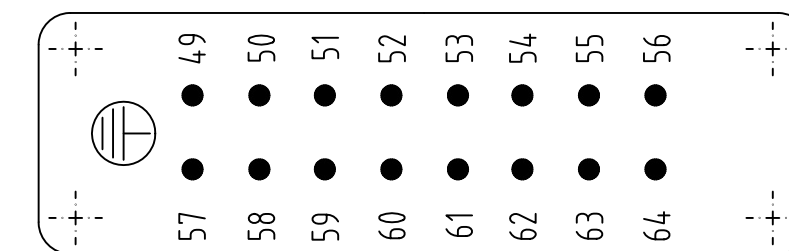

Contact arrangement / view from termination side

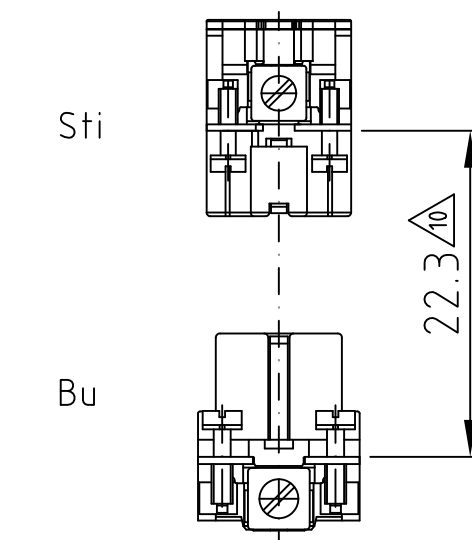

Assembling instruction

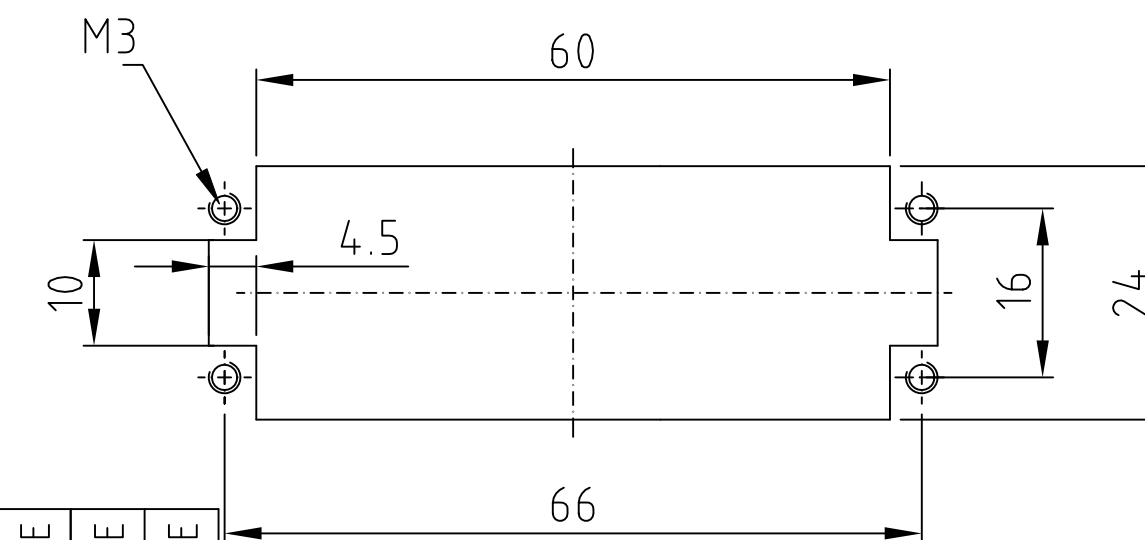

 DISTANCE FOR SAFETY
CONTACT MARKING MAX. 24 mm

SEE TE CONNECTIVITY QUALITYMANAGEMENT PROCEDURE NO. 1.12

[illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1103416-8](#)